
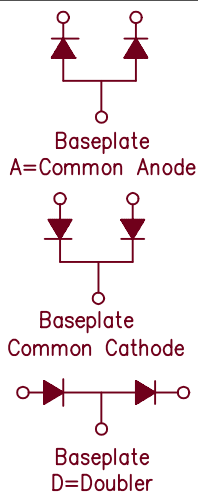


Schottky PowerMod

CPT60080 — CPT600100

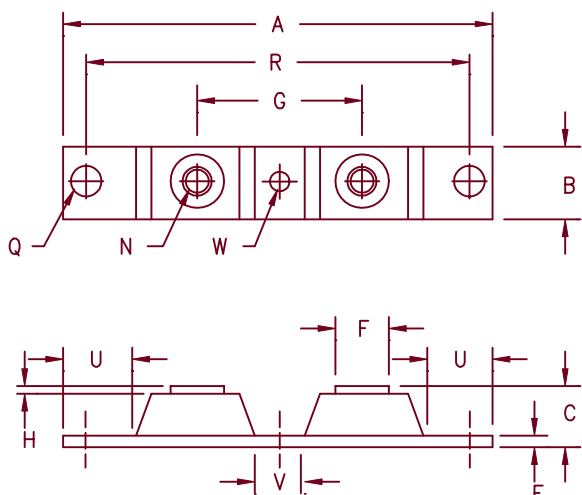

Notes:
Baseplate: Nickel plated copper

| Dim. | Inches | | Millimeters | | Notes |
|------|--------|-------|-------------|-------|--------|
| | Min. | Max. | Min. | Max. | |
| A | --- | 3.630 | --- | 92.20 | |
| B | 0.700 | 0.800 | 17.78 | 20.32 | |
| C | --- | .680 | --- | 17.28 | |
| E | 0.120 | 0.130 | 3.05 | 3.30 | |
| F | 0.490 | 0.510 | 12.45 | 12.95 | |
| G | 1.375 | BSC | 34.92 | BSC | |
| H | 0.050 | --- | 1.25 | --- | |
| N | --- | --- | --- | --- | 1/4-20 |
| Q | 0.275 | 0.290 | 6.99 | 7.37 | Dia. |
| R | 3.150 | BSC | 80.01 | BSC | |
| U | 0.600 | --- | 15.24 | --- | |
| V | 0.312 | 0.340 | 7.92 | 8.64 | |
| W | 0.180 | 0.195 | 4.57 | 4.95 | Dia. |

| Microsemi Catalog Number | Industry Part Number | Working Peak Reverse Voltage | Repetitive Peak Reverse Voltage |
|--------------------------|----------------------|------------------------------|---------------------------------|
| CPT60080* | MBR60080CT | 80V | 80V |
| CPT60090* | | 90V | 90V |
| CPT600100* | MBR600100CT | 100V | 100V |

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard ring protection
- 600 Amperes/ 80 to 100 Volts
- 175°C junction temperature
- Reverse energy tested

Electrical Characteristics

| | | |
|--|-----------------------------|--|
| Average forward current per pkg | I _{F(AV)} 600 Amps | T _C = 132°C, Square wave, R _{θJC} = 0.10°C/W |
| Average forward current per leg | I _{F(AV)} 300 Amps | T _C = 132°C, Square wave, R _{θJC} = 0.20°C/W |
| Maximum surge current per leg | I _{FSM} 6000 Amps | 8.3ms, half sine, T _J = 175°C |
| Maximum repetitive reverse current per leg | I _{R(OV)} 2 Amps | f = 1 KHZ, 25°C, 1 μsec square wave |
| Max peak forward voltage per leg | V _{FM} 0.85 Volts | I _{FM} = 300A: T _J = 25°C |
| Max peak forward voltage per leg | V _{FM} 0.62 Volts | I _{FM} = 300A: T _J = 175°C |
| Max peak reverse current per leg | I _{RM} 75 mA | V _{RRM} , T _J = 125°C* |
| Max peak reverse current per leg | I _{RM} 8.0 mA | V _{RRM} , T _J = 25°C |
| Typical junction capacitance per leg | C _J 9000 pF | V _R = 5.0V, T _C = 25°C |

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

| | | |
|--------------------------------------|------------------|-------------------------------|
| Storage temp range | T _{STG} | -55°C to 175°C |
| Operating junction temp range | T _J | -55°C to 175°C |
| Max thermal resistance per leg | R _{θJC} | 0.20°C/W Junction to case |
| Max thermal resistance per pkg | R _{θJC} | 0.10°C/W Junction to case |
| Typical thermal resistance (greased) | R _{θCS} | 0.08°C/W Case to sink |
| Terminal Torque | | 35-50 inch pounds |
| Mounting Base Torque (outside holes) | | 30-40 inch pounds |
| Mounting Base Torque (center hole) | | 8-10 inch pounds |
| center hole must be torqued first | | |
| Weight | | 2.8 ounces (78 grams) typical |



800 Hoyt Street
Broomfield, CO. 80020
PH: (303) 469-2161
FAX: (303) 466-3775
www.microsemi.com

4-22-03 Rev. 3

CPT60080 — CPT600100

Figure 1
Typical Forward Characteristics — Per Leg

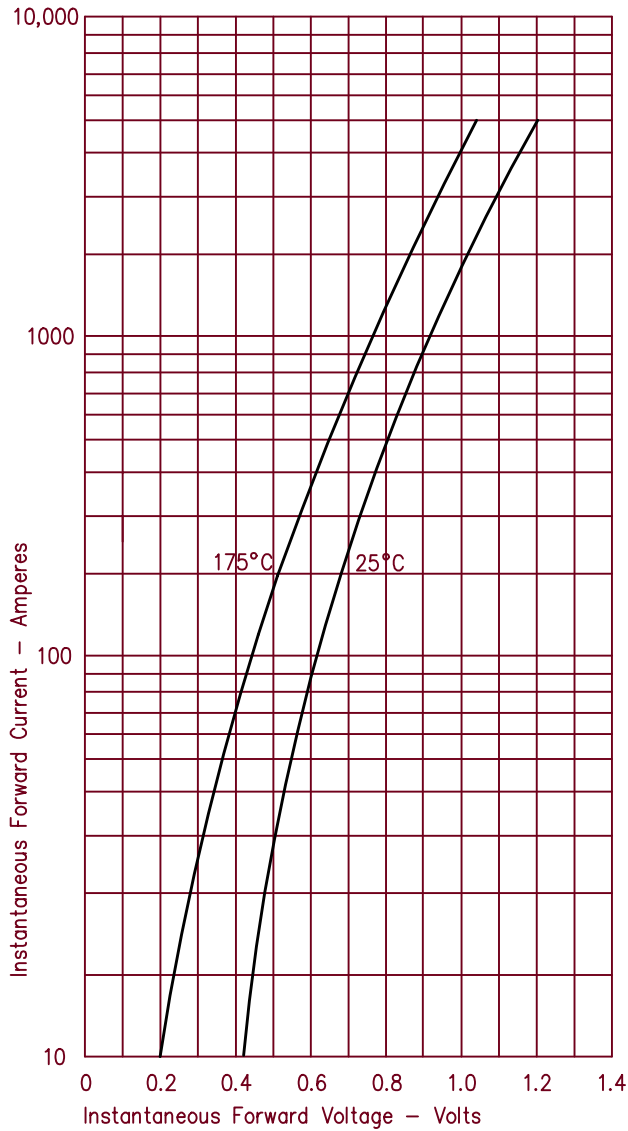


Figure 3
Typical Junction Capacitance — Per Leg

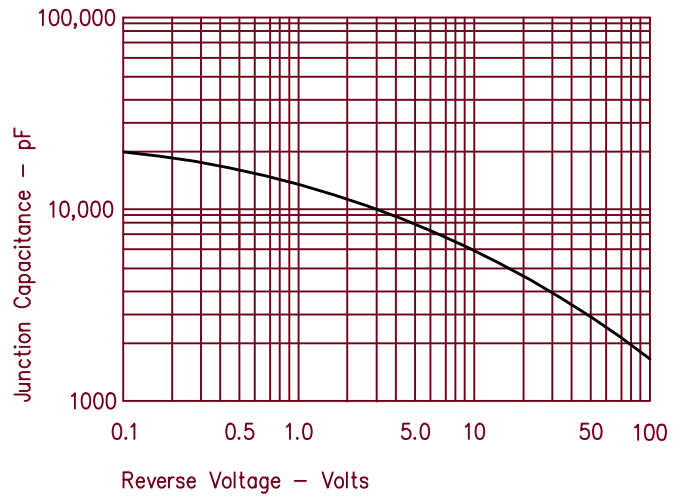


Figure 4
Forward Current Derating — Per Leg

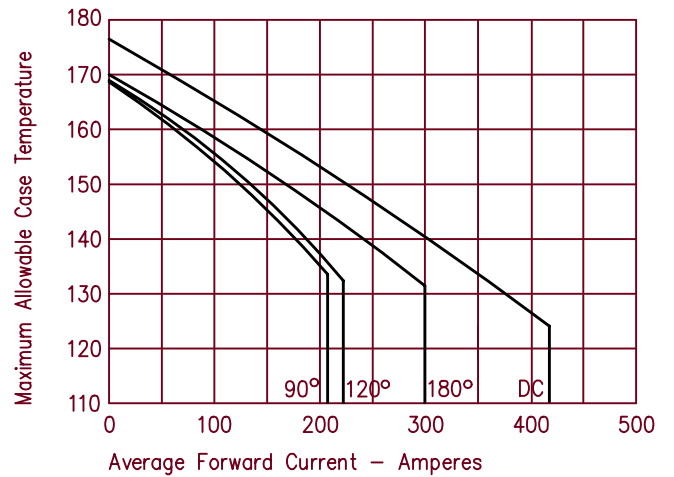


Figure 2
Typical Reverse Characteristics — Per Leg

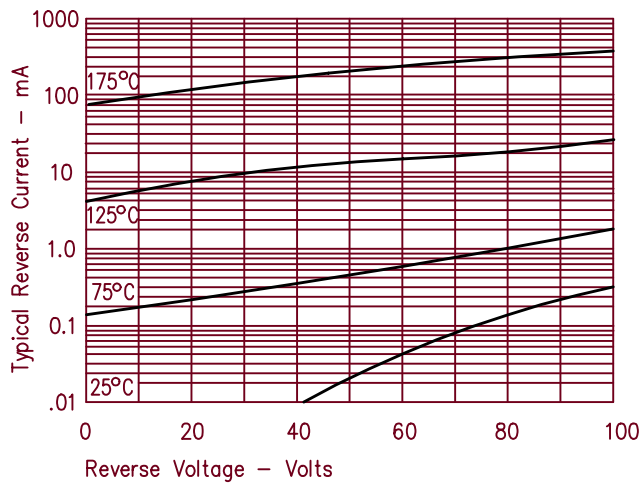


Figure 5
Maximum Forward Power Dissipation — Per Leg

