


# Phase Control Thyristors

$V_{RRM} = 1200-1600 \text{ V}$   
 $I_{T(RMS)} = 160 \text{ A}$   
 $I_{T(AV)M} = 100 \text{ A}$

$V_{RSM}$	$V_{RRM}$	Type
$V_{DSM}$	$V_{DRM}$	
V	V	
1300	1200	CS 72-12io8
1700	1600	CS 72-16io8

Not for new application



TO-209AC  
(TO-94)



1 = Anode, 2 = Cathode,  
3 = Gate, 4 = Auxiliary Cathode

### Features

- Thyristor for line frequencies
- International standard package JEDEC TO-209AC
- Planar glassivated chip
- Long-term stability of blocking currents and voltages
- Gate and auxiliary cathode pin connection

### Applications


- Motor control
- Power converter
- AC power controller

### Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling

Symbol	Test Conditions	Maximum Ratings	
$I_{T(RMS)}$	$T_{VJ} = T_{VJM}$	160	A
	$T_{case} = 85^{\circ}\text{C}; 180^{\circ} \text{ sine}$	75	A
$I_{T(AV)M}$	$T_{case} = 65^{\circ}\text{C}; 180^{\circ} \text{ sine}$	100	A
$I_{TSM}$	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	2000 2130 A
	$T_{VJ} = T_{VJM}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	1750 1850 A
$I^2t$	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	20 000 19 000 $\text{A}^2\text{s}$
	$T_{VJ} = T_{VJM}; V_R = 0$	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	15 000 14 200 $\text{A}^2\text{s}$
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}; f = 50\text{Hz}; t_p = 200\mu\text{s}; V_D = 1/2 V_{DRM}; I_G = 0.5 \text{ A}$	repetitive, $I_T = 225 \text{ A}$	100 $\text{A}/\mu\text{s}$
	$I_G = 0.5 \text{ A}; di_G/dt = 0.5 \text{ A}/\mu\text{s}$	non repetitive, $I_T = I_{T(AV)M}$	500 $\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}; R_{GK} = \infty; \text{method 1 (linear voltage rise)}$	$V_{DR} = 2/3 V_{DRM}$	1000 $\text{V}/\mu\text{s}$
$P_{GM}$	$T_{VJ} = T_{VJM}; t_p = 30 \mu\text{s}$		30 W
$P_{G(AV)}$	$I_T = I_{T(AV)M}; t_p = 500 \mu\text{s}$		1 W
$V_{RGM}$			10 V
$T_{VJ}$			-40...+125 $^{\circ}\text{C}$
$T_{VJM}$			125 $^{\circ}\text{C}$
$T_{stg}$			-40...+125 $^{\circ}\text{C}$
$M_d$	Mounting torque		16-20 Nm
			142-177 lb.in.
Weight			110 g

### Dimensions in mm (1 mm = 0.0394")

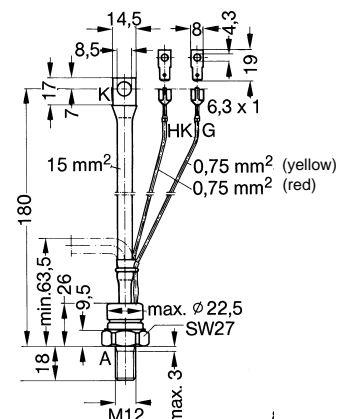

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

Symbol	Test Conditions	Characteristic Values	
$I_R, I_D$	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	$\leq$	15 mA
$V_T$	$I_T = 300 \text{ A}; T_{VJ} = 125^\circ\text{C}$	$\leq$	1.78 V
$V_{T0}$	For power-loss calculations only ( $T_{VJ} = 125^\circ\text{C}$ )		1.0 V
$r_T$			2.6 m $\Omega$
$V_{GT}$	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	$\leq$	3.0 V
	$T_{VJ} = -40^\circ\text{C}$	$\leq$	3.5 V
$I_{GT}$	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	$\leq$	150 mA
	$T_{VJ} = -40^\circ\text{C}$	$\leq$	200 mA
$V_{GD}$	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	$\leq$	0.3 V
$I_{GD}$		$\leq$	3 mA
$I_L$	$T_{VJ} = 25^\circ\text{C}; t_p = 10 \mu\text{s}$ $I_G = 0.5 \text{ A}; di_G/dt = 0.5 \text{ A}/\mu\text{s}$	$\leq$	300 mA
$I_H$	$T_{VJ} = 25^\circ\text{C}; V_D = 6 \text{ V}; R_{GK} = \infty$	$\leq$	200 mA
$t_{gd}$	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.5 \text{ A}; di_G/dt = 0.5 \text{ A}/\mu\text{s}$	$\leq$	2 $\mu\text{s}$
$t_q$	$T_{VJ} = T_{VJM}; I_T = 75 \text{ A}, t_p = 300 \mu\text{s}; di/dt = -20 \text{ A}/\mu\text{s}$ $V_R = 100 \text{ V}; dv/dt = 10 \text{ V}/\mu\text{s}; V_D = 2/3 V_{DRM}$	typ.	150 $\mu\text{s}$
$R_{thJC}$	DC current		0.36 K/W
$R_{thJH}$	DC current		0.46 K/W
$d_s$	Creepage distance on surface		10.5 mm
$d_A$	Strike distance through air		10.5 mm
$a$	Max. acceleration, 50 Hz		50 m/s <sup>2</sup>

**Accessories:**

Nut M12 DIN 439/SW27

Lock washer A12 DIN 128