

## SPECIFICATIONS

Electrical Ratings	50mA @ 48VDC
Electrical Life	100,000 cycles typical
Contact Resistance	< 50 mΩ initial
Actuation Force	180 +/- 50gF
Actuator Travel	.25 +/- .1mm
Dielectric Strength	1000Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C





## MATERIALS ←RoHS COMPLIANT

Actuator	6/6 Nylon
Housing	6/6 Nylon
Cover	Stainless Steel
Contacts	Stainless Steel, Silver Plated
Terminals	Brass, Silver Plated





## ORDERING INFORMATION

<b>1. Series:</b>	<b>CT1101</b>	<b>4.3</b>
CT1101		
CT1101L		
<b>2. Actuator Length "L" (mm):</b>		
4.3		
5.0		

## DIMENSIONS

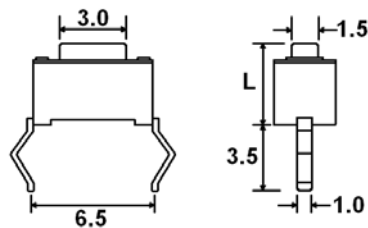

Part Number	"L" (mm)
CT11014.3	4.3
CT11015.0	5.0

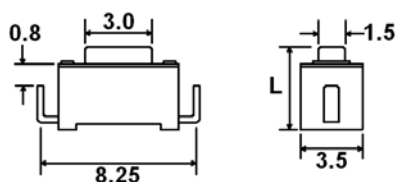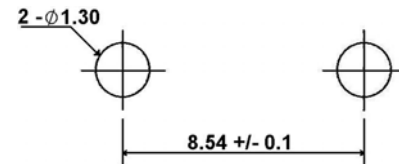

Part Number	"L" (mm)
CT1101L4.3	4.3
CT1101L5.0	5.0

