





MODEL NUMBER DA0885

GaAs 5 Section Attenuator

FEATURES

- 10 - 1000 MHz
- 1 mA, +5 VDC
- 1 dB LSB, 31 dB Range
- 38 nSec Switching Speed
- 12 nSec Transition Time
- TTL Control
- 24 Pin DIP

5 BIT

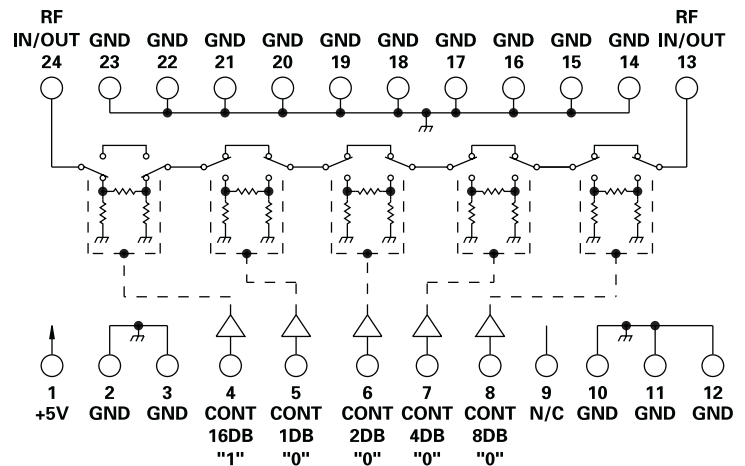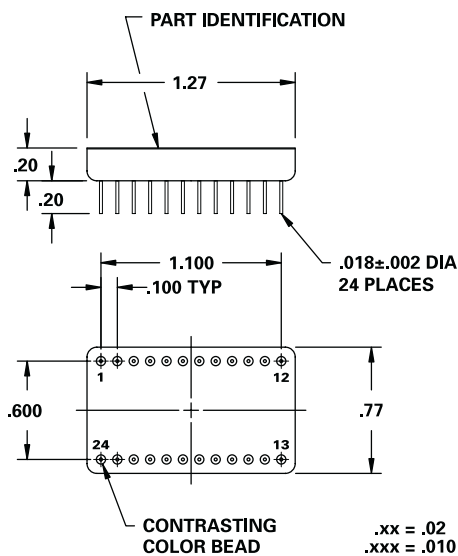

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	10		1000	MHz	
DC Current		1	5	mA	At +5 VDC Supply
Control Type		TTL			5 Line Logic "0" = Thru Logic "1" = Attenuation
Control Current	High Low	0 0	±40 ±40	µA	V _{IH} = +3.0 V V _{IL} = +0.5 V
Insertion Loss		3.9 5.1	5.0 6.5	dB	10 - 100 MHz 100 - 1000 MHz
Attenuation	LSB Range Accuracy Vs. Phase	0 1 0.6	31 ±5	dB dB DEG	1, 2, 4, 8, 16 ± (0.25 dB ± 2% of Atten. Setting in dB) At 240 MHz
VSWR		1.2/1	1.4/1		
Impedance		50		OHMS	
Switching Speed		38	50	nSec	50% TTL to 90% / 10% RF
Transition (Rise/Fall) Time		12		nSec	90% / 10% or 10% / 90% RF
Switching (Video) Transients		130		mV	Peak Value
Intercept Points	2nd 3rd	+65 +44		dBm	70 MHz / 50 MHz 35 MHz / 50 MHz
RF Power	Operate No Damage	+13 +27	+10 +27	dBm	0.1 dB Compression
Operating Temperature		-55	+25	+125	°C TA

