


Features


- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDTA)
- Built-In Biasing Resistor, R2 only
- **Lead Free/RoHS Compliant (Note 2)**

Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Marking: Date Code and Marking Code (See Table Below & Page 2)
- Ordering Information (See Page 2)
- Weight: 0.008 grams (approximate)

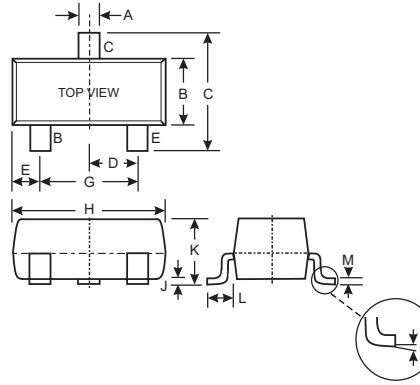

| SOT-23 | | |
|----------------------|-------|-------|
| Dim | Min | Max |
| A | 0.37 | 0.51 |
| B | 1.20 | 1.40 |
| C | 2.30 | 2.50 |
| D | 0.89 | 1.03 |
| E | 0.45 | 0.60 |
| G | 1.78 | 2.05 |
| H | 2.80 | 3.00 |
| J | 0.013 | 0.10 |
| K | 0.903 | 1.10 |
| L | 0.45 | 0.61 |
| M | 0.085 | 0.180 |
| α | 0° | 8° |
| All Dimensions in mm | | |

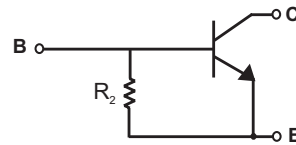

SCHEMATIC DIAGRAM

| P/N | R2 (NOM) | MARKING |
|------------|---------------|---------|
| DDTC114GCA | 10K Ω | N26 |
| DDTC124GCA | 22K Ω | N27 |
| DDTC144GCA | 47K Ω | N28 |
| DDTC115GCA | 100K Ω | N29 |

Maximum Ratings @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|-------------|------|
| Collector-Base Voltage | V _{CBO} | 50 | V |
| Collector-Emitter Voltage | V _{CEO} | 50 | V |
| Emitter-Base Voltage | V _{EBO} | 5 | V |
| Collector Current | I _C (Max) | 100 | mA |
| Power Dissipation | P _d | 200 | mW |
| Thermal Resistance, Junction to Ambient Air (Note 1) | R _{θJA} | 625 | °C/W |
| Operating and Storage and Temperature Range | T _j , T _{STG} | -55 to +150 | °C |

- Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. No purposefully added lead.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition |
|--------------------------------------|------------|---------------|-----|-----|-----|---------------|---|
| Collector-Base Breakdown Voltage | | BV_{CBO} | 50 | — | — | V | $I_C = 50\mu\text{A}$ |
| Collector-Emitter Breakdown Voltage | | BV_{CEO} | 50 | — | — | V | $I_C = 1\text{mA}$ |
| Emitter-Base Breakdown Voltage | | BV_{EBO} | 5 | — | — | V | $I_E = 720\mu\text{A}$, DDTC114GCA $I_E = 330\mu\text{A}$, DDTC124GCA $I_E = 160\mu\text{A}$, DDTC144GCA $I_E = 72\mu\text{A}$, DDTC115GCA |
| Collector Cutoff Current | | I_{CBO} | — | — | 0.5 | μA | $V_{CB} = 50\text{V}$ |
| Emitter Cutoff Current | DDTC114GCA | I_{EBO} | 300 | — | 580 | μA | $V_{EB} = 4\text{V}$ |
| | DDTC124GCA | | 140 | | 260 | | |
| | DDTC144GCA | | 65 | | 130 | | |
| | DDTC115GCA | | 30 | | 58 | | |
| Collector-Emitter Saturation Voltage | | $V_{CE(sat)}$ | — | — | 0.3 | V | $I_C = 10\text{mA}$, $I_B = 0.5\text{mA}$ |
| DC Current Transfer Ratio | DDTC114GCA | h_{FE} | 30 | — | — | — | $I_C = 5\text{mA}$, $V_{CE} = 5\text{V}$ |
| | DDTC124GCA | | 56 | | | | |
| | DDTC144GCA | | 68 | | | | |
| | DDTC115GCA | | 82 | | | | |
| Bleeder Resistor (R_2) Tolerance | | ΔR_2 | -30 | — | +30 | % | — |
| Gain-Bandwidth Product* | | f_T | — | 250 | — | MHz | $V_{CE} = 10\text{V}$, $I_E = -5\text{mA}$, $f = 100\text{MHz}$ |


* Transistor - For Reference Only

Ordering Information (Note 3)

| Device | Packaging | Shipping |
|----------------|-----------|------------------|
| DDTC114GCA-7-F | SOT-23 | 3000/Tape & Reel |
| DDTC124GCA-7-F | SOT-23 | 3000/Tape & Reel |
| DDTC144GCA-7-F | SOT-23 | 3000/Tape & Reel |
| DDTC115GCA-7-F | SOT-23 | 3000/Tape & Reel |

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information

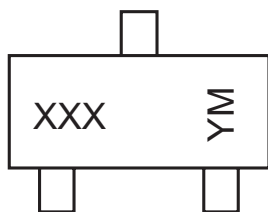

XXX = Product Type Marking Code, See Table on Page 1
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

TYPICAL CURVES - DDTC114GCA

NEW PRODUCT

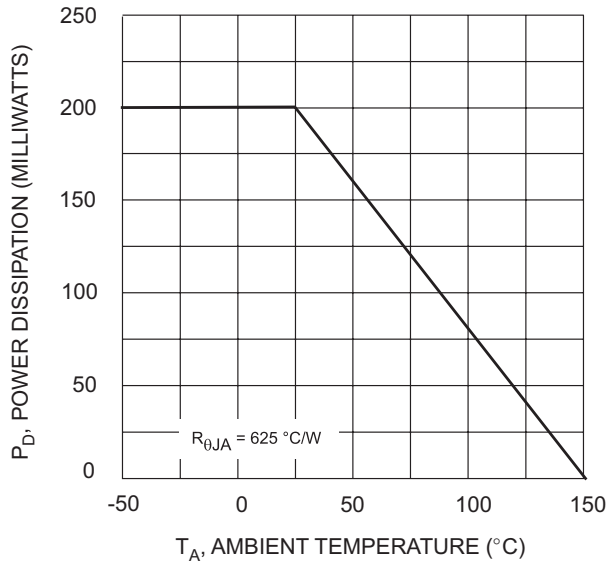


Fig. 1 Derating Curve

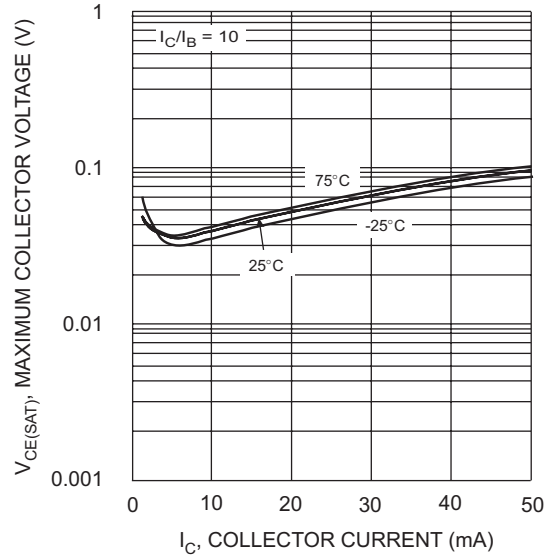


Fig. 2 $V_{CE(SAT)}$ vs. I_C

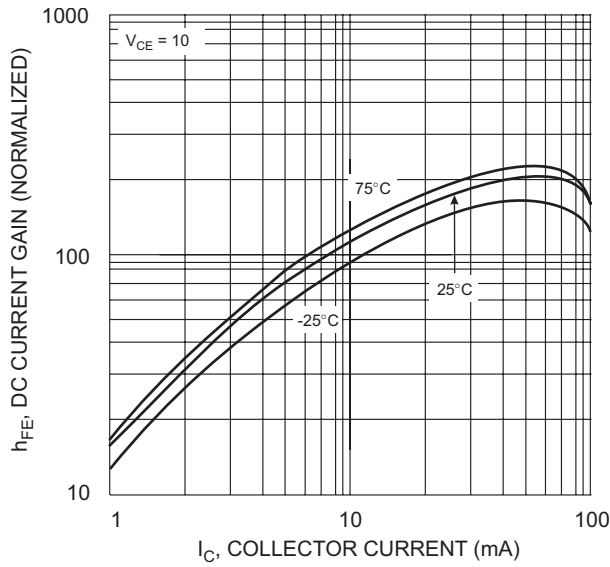


Fig. 3 DC CURRENT GAIN

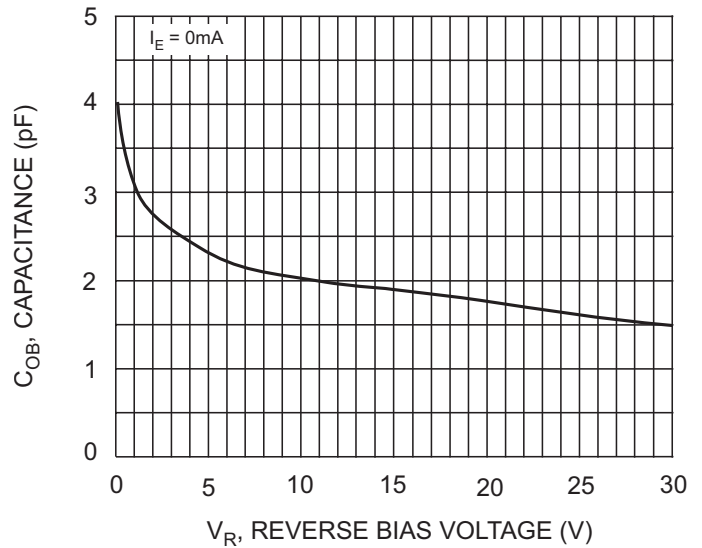


Fig. 4 Output Capacitance

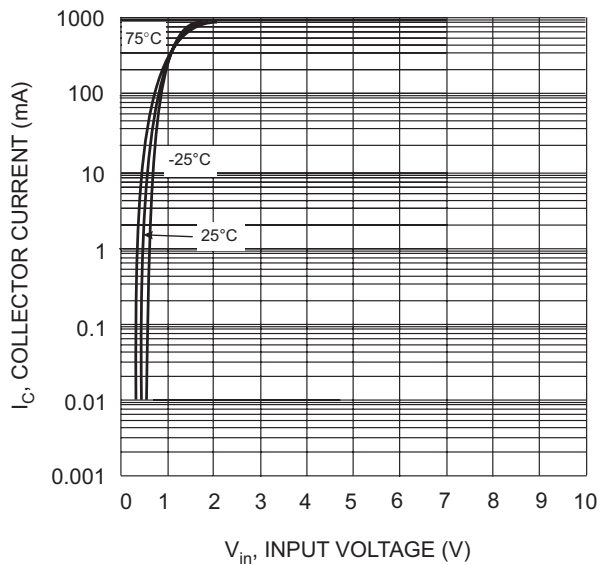


Fig. 5 Collector Current Vs. Input Voltage

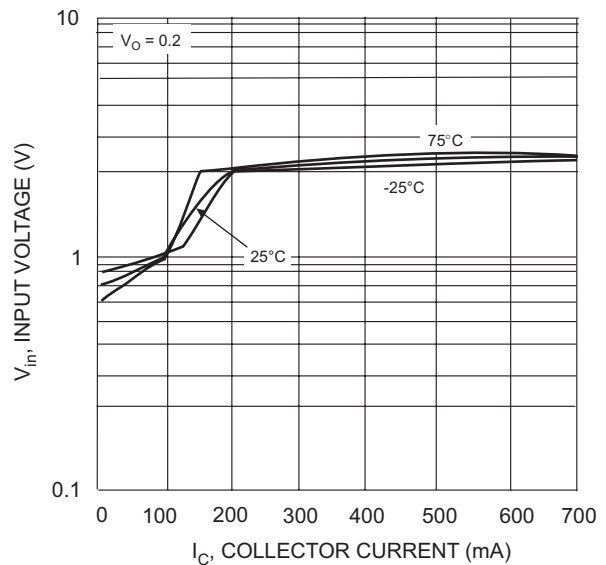


Fig. 6 Input Voltage vs. Collector Current

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at www.diodes.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.