


### Switchmode Dual Fast Recovery Power Rectifiers

... Designed for use in switching power supplies, inverters and as free wheeling diodes. These state-of-the-art devices have the following features:

- \* Glass Passivated chip junctions
- \* Low Reverse Leakage Current
- \* Fast Switching for High Efficiency
- \* 150°C Operating Junction Temperature
- \* Low Forward Voltage , High Current Capability
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

**FAST RECOVERY  
RECTIFIERS**


**30 AMPERES  
300 -- 600 VOLTS**



**TO-247 (3P)**

#### MAXIMUM RATINGS


Characteristic	Symbol	F30D				Unit
		30	40	50	60	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	300	400	500	600	V
RMS Reverse Voltage	$V_{R(RMS)}$	210	280	350	420	V
Average Rectifier Forward Current Per Leg Per Total Device $T_c=125^\circ\text{C}$	$I_{F(AV)}$	15 30				A
Peak Repetitive Forward Current ( Rate $V_R$ , Square Wave, 20kHz, $T_c=125^\circ\text{C}$ )	$I_{FM}$	30				A
Non-Repetitive Peak Surge Current ( Surge applied at rate load conditions halfwave, single phase, 60Hz )	$I_{FSM}$	200				A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	- 65 to + 150				°C









DIM	MILLIMETERS	
	MIN	MAX
A	--	16.2
B	1.7	2.7
C	5.0	6.0
D	--	23.0
E	14.8	15.2
F	11.7	12.7
G	--	4.5
H	--	2.5
I	--	3.5
J	1.1	1.4
K	5.25	5.65
L	19	--
M	4.7	5.3
N	2.8	3.2
O	0.45	0.85

#### ELECTRICAL CHARACTERISTICS


Characteristic	Symbol	F30D				Unit
		30	40	50	60	
Maximum Instantaneous Forward Voltage ( $I_F=15$ Amp, $T_c = 25^\circ\text{C}$ )	$V_F$	1.30				V
Maximum Instantaneous Reverse Current ( Rated DC Voltage, $T_c = 25^\circ\text{C}$ ) ( Rated DC Voltage, $T_c = 125^\circ\text{C}$ )	$I_R$	10 700				uA
Reverse Recovery Time ( $I_F = 0.5$ A, $I_R=1.0$ , $I_{rr}=0.25$ A )	$T_{rr}$	250				ns
Typical Junction Capacitance ( Reverse Voltage of 4 volts & f=1 MHz)	$C_P$	150		120		pF



# F30D30 Thru F30D60

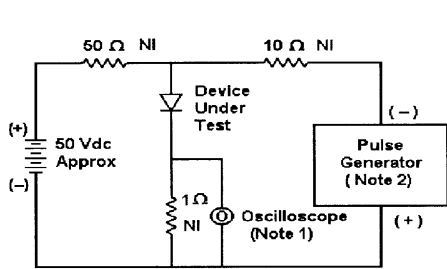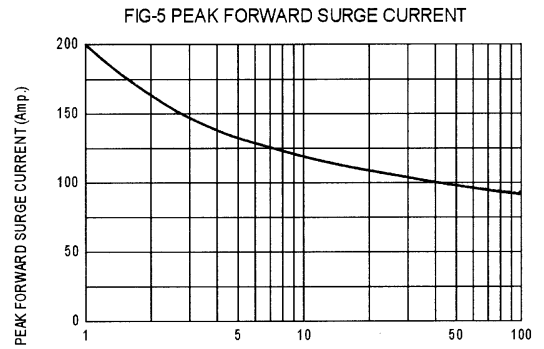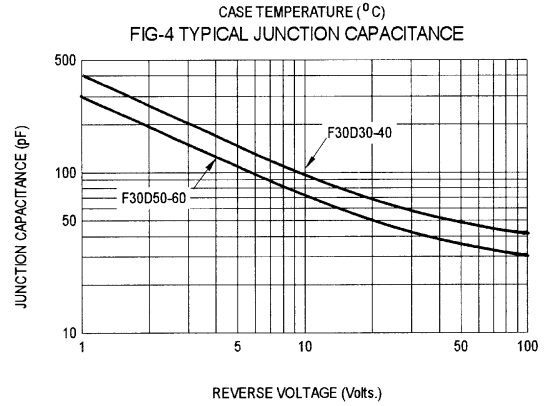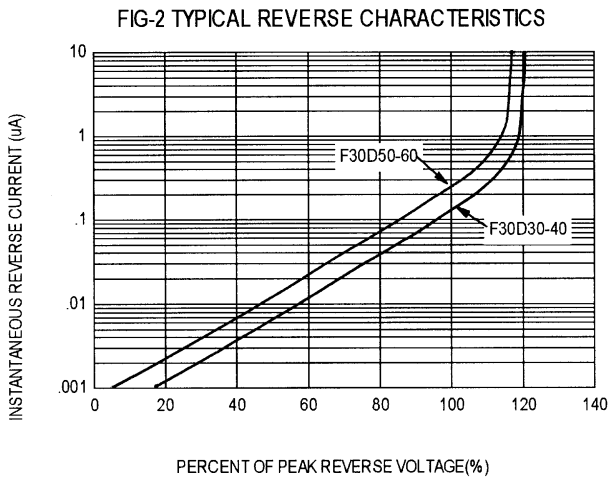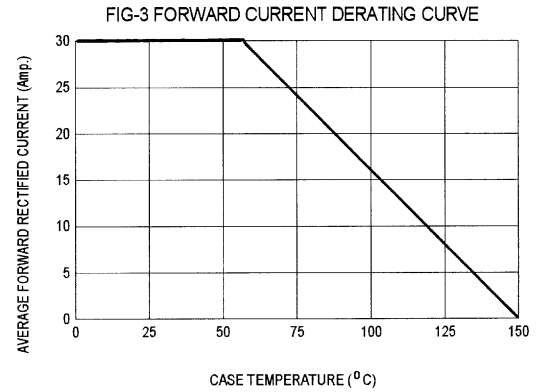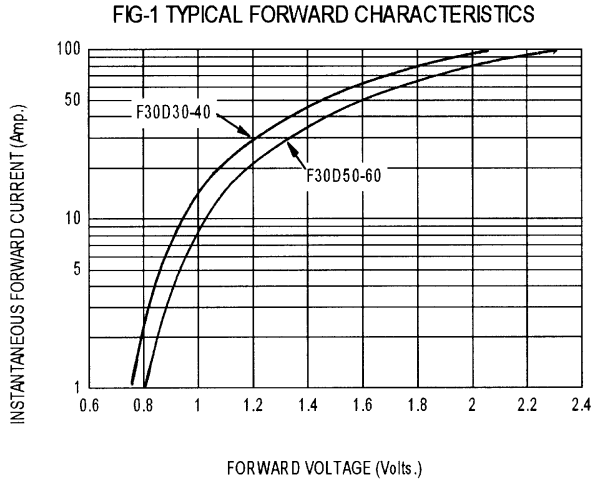

- Notes:**  
 1. Rise Time = 7 ns max. Input Impedance = 1 M.Ω , 22 pF  
 2. Rise Time = 10 ns max. Input Impedance = 50 Ω

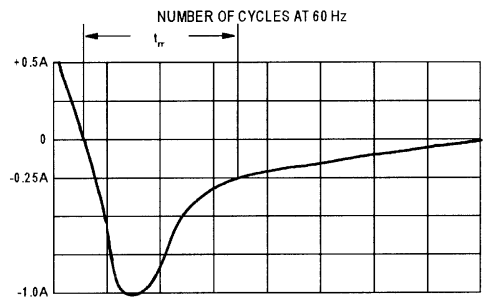

Set time base for 50/100 ns/div

**Fig-6 Reverse Recovery Time Characteristic and Test Circuit Diagram**