


40 Amp Schottky OR'ing Rectifier

FST4015

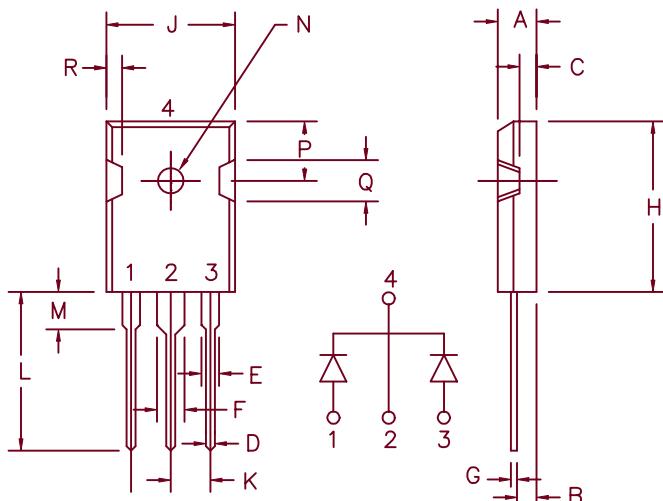

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog
Number
FST4015

Industry
Part Number
40L15CW
MBR40L15CW

Working Peak
Reverse Voltage
15V

Repetitive Peak
Reverse Voltage
15V

- Schottky barrier rectifier
- $V_f @ 20A, 125^\circ C = 0.29V$
- High surge capacity
- $125^\circ C$ Junction temperature
- Guard ring reverse protection

Electrical Characteristics

Average Forward Current per leg
Average Forward Current per pkg
Maximum Surge Current per leg
Max. Repetitive Reverse Current
Max. Peak Forward Voltage per leg
Typ. Peak Forward Voltage per leg
Max. Peak Reverse Current per leg
Typ. Peak Reverse Current per leg
Typ. Peak Reverse Current per leg
Typical Junction Capacitance per leg

$I_{F(AV)}$ 20 Amps
 $I_{F(AV)}$ 40 Amps
 I_{FSM} 300 Amps
 $I_{R(OV)}$ 2 Amps
 V_{FM} .40 Volts
 V_{FM} .29 Volts
 I_{RM} 8 mA
 I_{RM} 320 mA
 I_{RM} 175 mA
 C_J 1550 pF

$T_C = 105^\circ C$
 $T_C = 105^\circ C$
8.3ms, half sine
 $f=1KHZ, 25^\circ C, 1\mu s$ square wave
 $I_{FM} = 20A, T_J = 25^\circ C^*$
 $I_{FM} = 20A, T_J = 125^\circ C^*$
 $V_{RRM}, T_J = 25^\circ C$
 $V_{RRM}, T_J = 100^\circ C^*$
 $V_R = 5V, T_J = 100^\circ C^*$
 $V_R = 5.0V, T_J = 25^\circ C$

*Pulse test: Pulse width 300 μ sec Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 150°C
Operating junction temp range	T_J	-55°C to 125 °C
Max. thermal resistance per leg	$R_{\theta JC}$	1.5°C/W Junction to case
Max. thermal resistance per pkg	$R_{\theta JC}$	0.75°C/W Junction to case
Mounting torque		5-10 inch pounds (#6 screw)
Weight		.22 ounces (6.36 grams) typical

FST4015

Figure 1
Typical Forward Characteristics – Per Leg

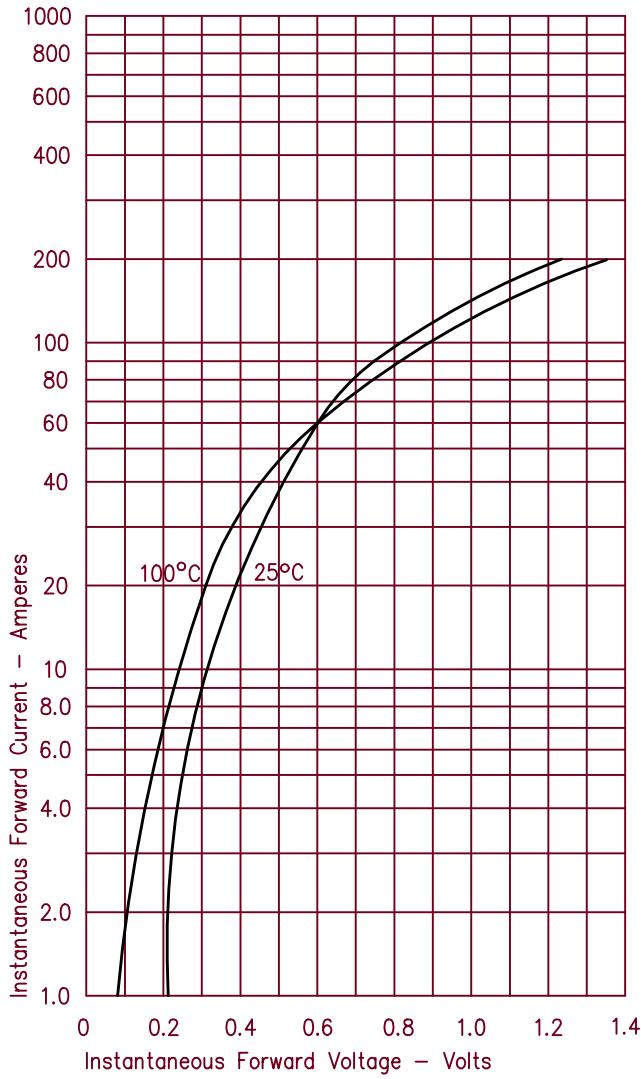


Figure 2
Typical Reverse Characteristics – Per Leg

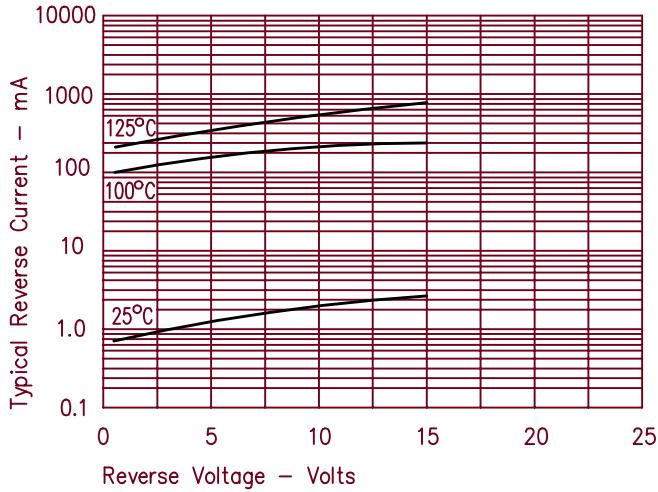


Figure 3
Typical Junction Capacitance – Per Leg

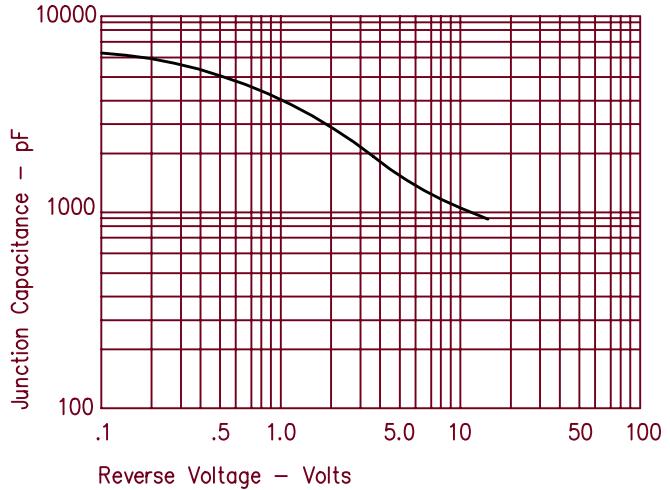


Figure 4
Forward Current Derating – Per Leg

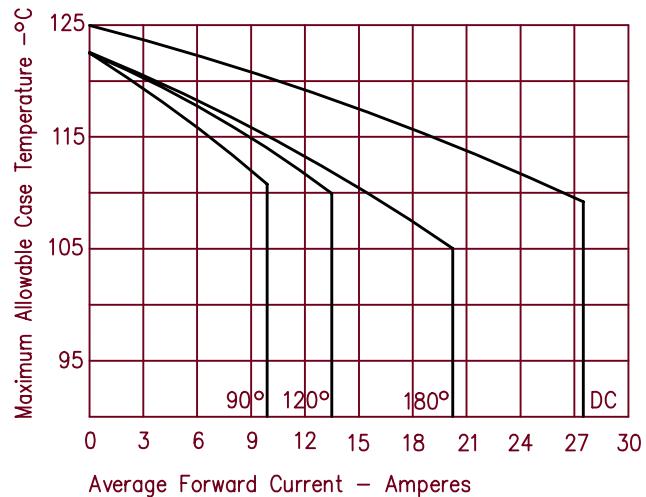


Figure 5
Maximum Forward Power Dissipation – Per Leg

