
LED Lamp GL3□□63 series

GL3□□63 series

ø3mm(T-1), Cylinder Type(Flangeless), Colored Diffusion LED Lamps for Backlight/Indicator


■ Outline Dimensions

(Unit: mm)

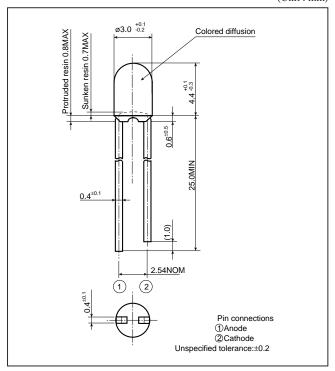

■ Radiation Diagram

(Ta=25°C)

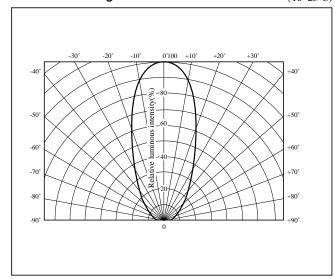

Absolute Maximum Ratings

 $(T_a=25^{\circ}C)$

Model No.	Radiation color		Power dissipation P	IF	Peak forward current IFM*1	Derating factor (mA/°C)		V _R	Topr	Storage temperature Tstg	Soldering temperature Tsol*2
			(mW)	(mA)	(mA)	DC	Pulse	(V)	(°C)	(°C)	(°C)
GL3PR63	Red	GaP	23	10	50	0.13	0.67	5	-25 to +85	-25 to +100	260
GL3HD63	Red	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3HS63	Sunset orange	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3HY63	Yellow	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3EG63	Yellow-green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3KG63	Green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260

^{*1} Duty ratio=1/10, Pulse width=0.1ms

■ Electro-optical Characteristics


(Ta=25°C)


												(1a-23 C)		
	Model No.	Forward voltage V _F (V)		Peak emission wavelength		Luminous intensity		Spectrum radiation bandwidth		Reverse current		Terminal capacitance		Page for
Lens type				$\lambda_p(nm)$	I_{F}	Iv(mcd)	IF	$\Delta\lambda(nm)$	IF	Ir(µA)	V_R	C _t (pF)		characteristics
		TYP	MAX	TYP	(mA)	TYP	(mA)	TYP	(mA)	MAX	(V)	TYP	(MHz)	diagrams
	GL3PR63	1.9	2.3	695	5	2.0	5	100	5	10	4	55	1	\rightarrow
	GL3HD63	2.0	2.8	635	20	17	20	35	20	10	4	20	1	\rightarrow
	GL3HS63	2.0	2.8	610	20	15	20	35	20	10	4	15	1	\rightarrow
	GL3HY63	2.0	2.8	585	20	16	20	30	20	10	4	35	1	\rightarrow
	GL3EG63	2.1	2.8	565	20	18	20	30	20	10	4	35	1	\rightarrow
	GL3KG63	2.1	2.8	555	20	6.0	20	25	20	10	4	40	1	\rightarrow


(Notice)
 In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


^{*2 5}s or less(At the position of 1.6mm or more from the bottom face of resin package)


PR series



















HD series

















Note) Characteristics shown in diagrams are typical values. (not assurance value)


Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


HS series



















HY series

















Note) Characteristics shown in diagrams are typical values. (not assurance value)


Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


EG series



















KG series














Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.