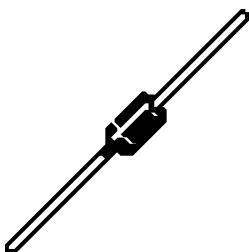
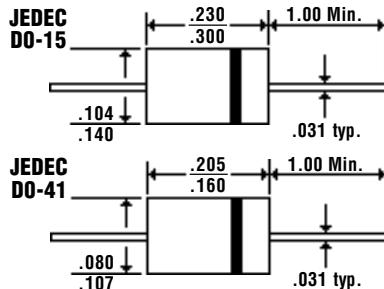


Description



Mechanical Dimensions



Features

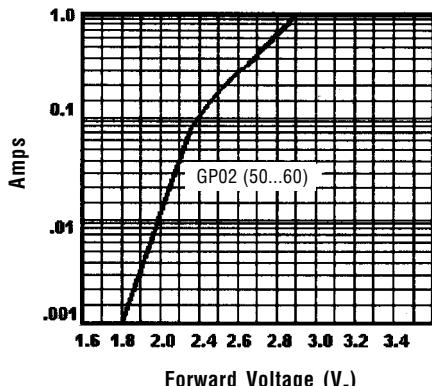
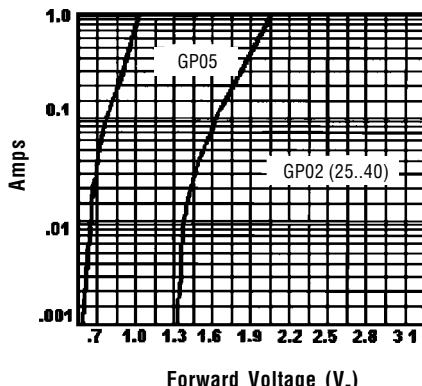
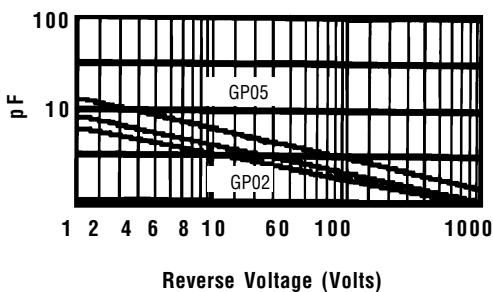
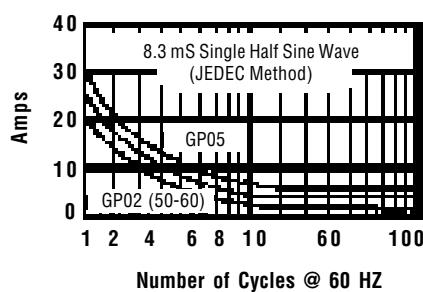
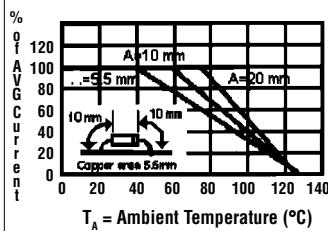
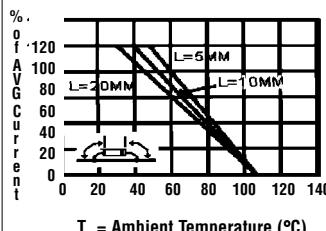
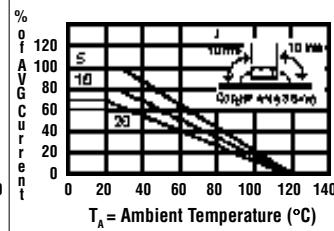
- DESIGNED FOR PHOTO FLASH APPLICATIONS
- BEVELED ROUND CHIP, AVALANCHE OPERATION
- LOW COST
- MEETS UL SPECIFICATION 94V-0

Electrical Characteristics @ 25°C.

GP02 & GP05 Series

Units

Maximum Ratings	GP02 (25-40)	GP05 (50-60)	Units
Average Forward Rectified Current... I_F @ $T_A = 55^\circ\text{C}$	< 0.2 >	< 0.2 >	Amps
Non-Repetitive Peak Forward Surge Current... $I_{F\text{SM}}$ @ Rated Load Conditions, 8.3 mS, ½ Sine Wave	< 25 >	< 20 >	Amps
Forward Voltage... V_F @ $I_F = 0.2$ Amps (GP02) @ $I_F = 0.5$ Amps (GP05)	< 3.0 >	< 3.0 >	Volts
DC Reverse Current... I_R 5.0 5.0	µAmps
Typical Reverse Recovery Time... T_{RR} 500 500	nS
Typical Junction Capacitance... C_J	< 7.0 >	< 5.0 >	pF
Operating Temperature Range... T_J -65 to 125 -65 to 125	°C
Storage Temperature Range... T_{STRG} -65 to 150 -65 to 150	°C
Maximum Peak Inverse Voltage...	Type	Package	V_{RM}
	GP05-10	DO-41	1000
	GP05.15	DO-41	1500
	GP05-16	DO-41	1600
	GP05-18	DO-41	1800
	GP05-20	DO-41	2000
	GP02-25	DO-41	2500
	GP02-30	DO-41	3000
	GP02-35	DO-15	3500
	GP02-40	DO-15	4000
	GP02-45	DO-15	4500
	GP02-50	DO-15	5000
	GP02-60	DO-15	6000

Typical Forward Characteristics

Typical Forward Characteristics

Typical Junction Capacitance

Maximum Surge Current

**Maximum Current Rating
Effect of Copper Area
Resistive/Inductive Load**

**Maximum Current Rating
Effect of Lead Lengths
Resistive/Inductive Load**

**Maximum Current Rating
Capacitive Load**


Ratings at
25 Deg. C ambient
temperature
unless otherwise
specified.

Single Phase Half
Wave, 60 HZ
Resistive or
Inductive Load.

For Capacitive
Load, Derate
Current by 20%.