

HD74ALVC1G125

Bus Buffer Gate with 3-state Output

HITACHI

ADE-205-617A (Z)

Rev. 1
July 2001

Description

The HD74ALVC1G125 has a bus buffer gate with 3-state output in a 5 pin package. Output is disabled when the associated output enable (\overline{OE}) input is high. To ensure the high impedance state during power up or power down, \overline{OE} should be connected to V_{CC} through a pull-up resistor; the minimum value of the resistor is determined by the current sinking capability of the driver. Low voltage and high speed operation is suitable for the battery powered products (e.g., notebook computers), and the low power consumption extends the battery life.


Features

- The basic gate function is lined up as hitachi uni logic series.
- Supplied on emboss taping for high speed automatic mounting.
- Supply voltage range : 1.2 to 3.6 V
Operating temperature range : -40 to $+85^{\circ}\text{C}$
- All inputs V_{IH} (Max.) = 3.6 V (@ $V_{CC} = 0$ V to 3.6 V)
All outputs V_o (Max.) = 3.6 V (@ $V_{CC} = 0$ V)
- Output current ± 2 mA (@ $V_{CC} = 1.2$ V)
 ± 4 mA (@ $V_{CC} = 1.4$ V to 1.6 V)
 ± 6 mA (@ $V_{CC} = 1.65$ V to 1.95 V)
 ± 18 mA (@ $V_{CC} = 2.3$ V to 2.7 V)
 ± 24 mA (@ $V_{CC} = 3.0$ V to 3.6 V)
- Package type


| Package type | Package code | Package suffix | Taping code |
|--------------|--------------|----------------|----------------------|
| VSON-5 pin | TNP-5D | VS | E (3,000 pcs / Reel) |

Outline and Article Indication

- HD74ALVC1G125



VSON-5




Function Table

Inputs

| \overline{OE} | A | Output Y |
|-----------------|---|----------|
| L | H | H |
| L | L | L |
| H | X | Z |

- H: High level
L: Low level
X: Immaterial
Z: High impedance

Pin Arrangement

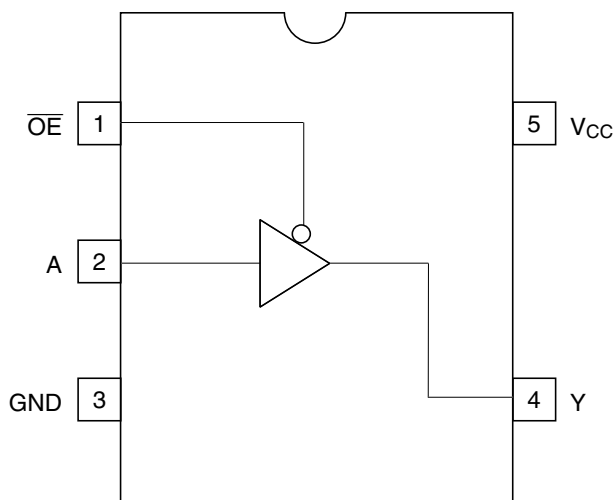

(Top view)

Absolute Maximum Ratings

| Item | Symbol | Ratings | Unit | Conditions |
|---|-----------------------|-------------------------------------|------------------|--|
| Supply voltage range | V_{CC} | -0.5 to 4.6 | V | |
| Input voltage range ¹ | V_I | -0.5 to 4.6 | V | |
| Output voltage range ^{1,2} | V_O | -0.5 to $V_{CC}+0.5$ -0.5 to 4.6 | V | Output : H or L or Z V_{CC} : OFF |
| Input clamp current | I_{IK} | -50 | mA | $V_I < 0$ |
| Output clamp current | I_{OK} | ± 50 | mA | $V_O < 0$ or $V_O > V_{CC}$ |
| Continuous output current | I_O | ± 50 | mA | $V_O = 0$ to V_{CC} |
| Continuous current through V_{CC} or GND | I_{CC} or I_{GND} | ± 100 | mA | |
| Maximum power dissipation at $T_a = 25^\circ\text{C}$ (in still air) ³ | P_T | 200 | mW | |
| Storage temperature | T_{stg} | -65 to 150 | $^\circ\text{C}$ | |

- Notes: The absolute maximum ratings are values which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.
1. The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
 2. This value is limited to 4.6 V maximum.
 3. The maximum package power dissipation was calculated using a junction temperature of 150 $^\circ\text{C}$.

Recommended Operating Conditions

| Item | Symbol | Min | Max | Unit | Conditions |
|------------------------------------|-----------------------|-----|----------|--------------------------|---------------------------------------|
| Supply voltage range | V_{CC} | 1.2 | 3.6 | V | |
| Input voltage range | V_I | 0 | 3.6 | V | |
| Output voltage range | V_O | 0 | V_{CC} | V | |
| Output current | I_{OH} | — | -2 | mA | $V_{CC} = 1.2\text{ V}$ |
| | | — | -4 | | $V_{CC} = 1.4\text{ V}$ |
| | | — | -6 | | $V_{CC} = 1.65\text{ V}$ |
| | | — | -18 | | $V_{CC} = 2.3\text{ V}$ |
| | | — | -24 | | $V_{CC} = 3.0\text{ V}$ |
| | I_{OL} | — | 2 | $V_{CC} = 1.2\text{ V}$ | |
| | | — | 4 | $V_{CC} = 1.4\text{ V}$ | |
| | | — | 6 | $V_{CC} = 1.65\text{ V}$ | |
| | | — | 18 | $V_{CC} = 2.3\text{ V}$ | |
| | | — | 24 | $V_{CC} = 3.0\text{ V}$ | |
| Input transition rise or fall rate | $\Delta t / \Delta v$ | 0 | 20 | ns / V | $V_{CC} = 1.2\text{ to }2.7\text{ V}$ |
| | | 0 | 10 | | $V_{CC} = 3.3\pm 0.3\text{ V}$ |
| Operating free-air temperature | T_a | -40 | 85 | °C | |

Note: Unused or floating inputs must be held high or low.

Electrical Characteristics

(Ta = -40 to 85°C)

| Item | Symbol | V _{cc} (V)† | Min | Typ | Max | Unit | Test conditions | | |
|--------------------------|------------------|--------------------------|-----------------------|-----|-----------------------|--------------------------|--|----|---|
| Input voltage | V _{IH} | 1.2 | V _{cc} ×0.75 | — | — | V | | | |
| | | 1.4 to 1.6 | V _{cc} ×0.7 | — | — | | | | |
| | | 1.65 to 1.95 | V _{cc} ×0.7 | — | — | | | | |
| | | 2.3 to 2.7 | 1.7 | — | — | | | | |
| | | 3.0 to 3.6 | 2.0 | — | — | | | | |
| | V _{IL} | 1.2 | — | — | V _{cc} ×0.25 | | | | |
| | | 1.4 to 1.6 | — | — | V _{cc} ×0.3 | | | | |
| | | 1.65 to 1.95 | — | — | V _{cc} ×0.3 | | | | |
| | | 2.3 to 2.7 | — | — | 0.7 | | | | |
| | | 3.0 to 3.6 | — | — | 0.8 | | | | |
| Output voltage | V _{OH} | Min to Max | V _{cc} -0.2 | — | — | V | I _{OH} = -100 μA | | |
| | | 1.2 | 0.9 | — | — | | I _{OH} = -2 mA | | |
| | | 1.4 | 1.1 | — | — | | I _{OH} = -4 mA | | |
| | | 1.65 | 1.2 | — | — | | I _{OH} = -6 mA | | |
| | | 2.3 | 1.7 | — | — | | I _{OH} = -18 mA | | |
| | | 3.0 | 2.2 | — | — | | I _{OH} = -24 mA | | |
| | V _{OL} | Min to Max | — | — | 0.2 | I _{OL} = 100 μA | | | |
| | | 1.2 | — | — | 0.3 | I _{OL} = 2 mA | | | |
| | | 1.4 | — | — | 0.3 | I _{OL} = 4 mA | | | |
| | | 1.65 | — | — | 0.3 | I _{OL} = 6 mA | | | |
| | | 2.3 | — | — | 0.55 | I _{OL} = 18 mA | | | |
| | | 3.0 | — | — | 0.55 | I _{OL} = 24 mA | | | |
| | | Input current | I _{IN} | 3.6 | — | — | ±5 | μA | V _{IN} = 3.6 V or GND |
| | | Off state output current | I _{OZ} | 3.6 | — | — | ±5 | μA | V _O = V _{cc} or GND |
| Quiescent supply current | I _{CC} | 3.6 | — | — | 10 | μA | V _{IN} = V _{cc} or GND, I _O = 0 | | |
| Output leakage current | I _{OFF} | 0 | — | — | 5 | μA | V _{IN} or V _O = 0 to 3.6 V | | |
| Input capacitance | C _{IN} | 3.3 | — | 4.0 | — | pF | V _{IN} = V _{cc} or GND | | |

Note: For conditions shown as Min or Max, use the appropriate values under recommended operating conditions.

Switching Characteristics

($T_a = -40$ to 85°C)

- $V_{CC} = 1.2\text{ V}$

| Item | Symbol | Min | Typ | Max | Unit | Test conditions | FROM (Input) | TO (Output) |
|------------------------|------------------------|-----|-----|-----|------|----------------------|-----------------|-------------|
| Propagation delay time | t_{PLH} t_{PHL} | — | 5.5 | — | ns | $C_L = 15\text{ pF}$ | A | Y |
| Enable time | t_{ZH} t_{ZL} | — | 6.5 | — | ns | $C_L = 15\text{ pF}$ | \overline{OE} | Y |
| Disable time | t_{HZ} t_{LZ} | — | 4.5 | — | ns | $C_L = 15\text{ pF}$ | \overline{OE} | Y |

- $V_{CC} = 1.5\pm 0.1\text{ V}$

| Item | Symbol | Min | Typ | Max | Unit | Test conditions | FROM (Input) | TO (Output) |
|------------------------|------------------------|-----|-----|-----|------|----------------------|-----------------|-------------|
| Propagation delay time | t_{PLH} t_{PHL} | 2.0 | — | 7.0 | ns | $C_L = 15\text{ pF}$ | A | Y |
| Enable time | t_{ZH} t_{ZL} | 2.0 | — | 7.0 | ns | $C_L = 15\text{ pF}$ | \overline{OE} | Y |
| Disable time | t_{HZ} t_{LZ} | 2.0 | — | 7.0 | ns | $C_L = 15\text{ pF}$ | \overline{OE} | Y |

- $V_{CC} = 1.8\pm 0.15\text{ V}$

| Item | Symbol | Min | Typ | Max | Unit | Test conditions | FROM (Input) | TO (Output) |
|------------------------|------------------------|-----|-----|-----|------|----------------------|-----------------|-------------|
| Propagation delay time | t_{PLH} t_{PHL} | 1.5 | — | 5.0 | ns | $C_L = 30\text{ pF}$ | A | Y |
| Enable time | t_{ZH} t_{ZL} | 1.5 | — | 5.0 | ns | $C_L = 30\text{ pF}$ | \overline{OE} | Y |
| Disable time | t_{HZ} t_{LZ} | 1.5 | — | 5.0 | ns | $C_L = 30\text{ pF}$ | \overline{OE} | Y |

Switching Characteristics (cont)

- $V_{CC} = 2.5 \pm 0.2$ V

| Item | Symbol | Min | Typ | Max | Unit | Test conditions | FROM (Input) | TO (Output) |
|------------------------|------------------------|-----|-----|-----|------|-----------------|-----------------|-------------|
| Propagation delay time | t_{PLH} t_{PHL} | 1.0 | — | 4.0 | ns | $C_L = 30$ pF | A | Y |
| Enable time | t_{ZH} t_{ZL} | 1.0 | — | 4.0 | ns | $C_L = 30$ pF | \overline{OE} | Y |
| Disable time | t_{HZ} t_{LZ} | 1.0 | — | 4.0 | ns | $C_L = 30$ pF | \overline{OE} | Y |

- $V_{CC} = 3.3 \pm 0.3$ V


| Item | Symbol | Min | Typ | Max | Unit | Test conditions | FROM (Input) | TO (Output) |
|------------------------|------------------------|-----|-----|-----|------|-----------------|-----------------|-------------|
| Propagation delay time | t_{PLH} t_{PHL} | 1.0 | — | 3.0 | ns | $C_L = 30$ pF | A | Y |
| Enable time | t_{ZH} t_{ZL} | 1.0 | — | 3.0 | ns | $C_L = 30$ pF | \overline{OE} | Y |
| Disable time | t_{HZ} t_{LZ} | 1.0 | — | 3.0 | ns | $C_L = 30$ pF | \overline{OE} | Y |

Operating Characteristics

($T_a = 25^\circ\text{C}$)

| Item | Symbol | V_{CC} (V) | Min | Typ | Max | Unit | Test conditions |
|-------------------------------|----------|--------------|-----|------|-----|------|-----------------|
| Power dissipation capacitance | C_{PD} | 1.5 | — | 9.5 | — | pF | $f = 10$ MHz |
| | | 1.8 | — | 9.5 | — | | |
| | | 2.5 | — | 10.0 | — | | |
| | | 3.3 | — | 11.0 | — | | |


Test Circuit

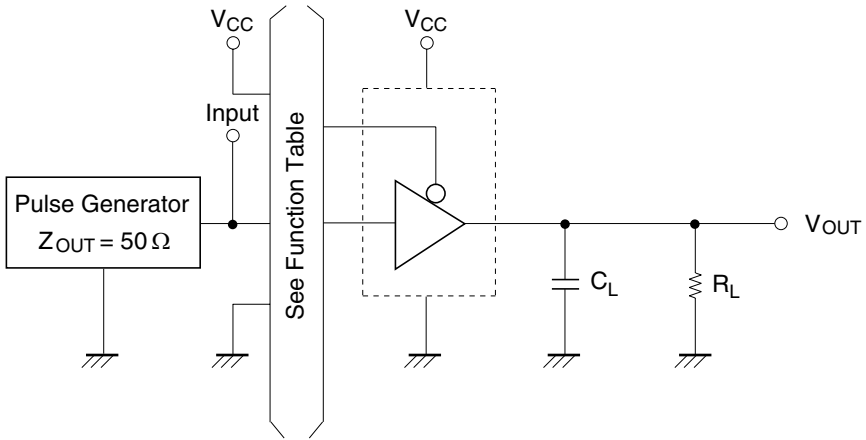

| Symbol | $V_{CC} = 1.2\text{ V},$ $1.5 \pm 0.1\text{ V}$ | $V_{CC} = 1.8 \pm 0.15\text{ V}$ | $V_{CC} = 2.5 \pm 0.2\text{ V},$ $3.3 \pm 0.3\text{ V}$ |
|--------|--|----------------------------------|--|
| R_L | 2.0 k Ω | 1.0 k Ω | 500 Ω |
| C_L | 15 pF | 30 pF | 30 pF |

Note: C_L includes probe and jig capacitance.


Waveforms

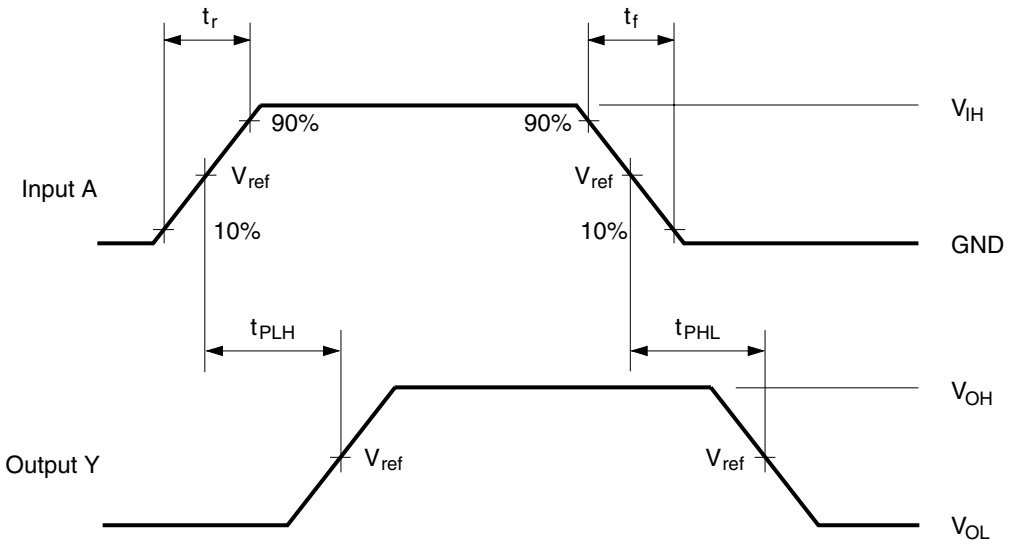

| Symbol | $V_{CC} = 1.2\text{ V},$ $1.5 \pm 0.1\text{ V},$ $1.8 \pm 0.15\text{ V}$ | $V_{CC} = 2.5 \pm 0.2\text{ V}$ | $V_{CC} = 3.3 \pm 0.3\text{ V}$ |
|-------------|--|---------------------------------|---------------------------------|
| t_r / t_f | 2.0 ns | 2.5 ns | 2.5 ns |
| V_{IH} | V_{CC} | V_{CC} | 2.7 V |
| V_{ref} | 50% | 50% | 1.5 V |

Note: Input waveform : PRR = 10 MHz, duty cycle 50%

Test Circuit

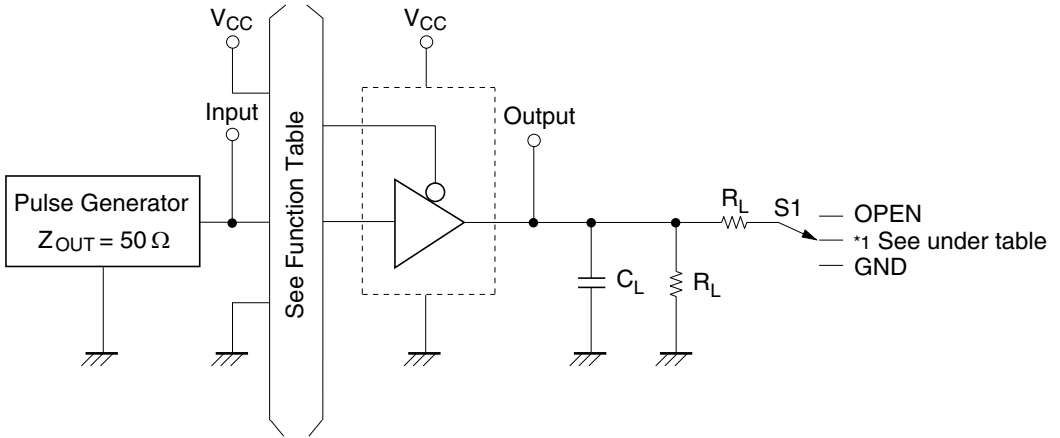


| Symbol | S1 | |
|---------------------|---|----------------------------------|
| | $V_{CC} = 1.2 \text{ V},$ $1.5 \pm 0.1 \text{ V},$ $1.8 \pm 0.15 \text{ V},$ $2.5 \pm 0.2 \text{ V}$ | $V_{CC} = 3.3 \pm 0.3 \text{ V}$ |
| t_{PLH} / t_{PHL} | OPEN | OPEN |
| t_{HZ} / t_{ZH} | GND | GND |
| t_{LZ} / t_{ZL} | $V_{CC} \times 2$ | 6.0 |

| Symbol | $V_{CC} = 1.2 \text{ V},$ $1.5 \pm 0.1 \text{ V}$ | $V_{CC} = 1.8 \pm 0.15 \text{ V}$ | $V_{CC} = 2.5 \pm 0.2 \text{ V},$ $3.3 \pm 0.3 \text{ V}$ |
|--------|--|-----------------------------------|--|
| R_L | 2.0 k Ω | 1.0 k Ω | 500 Ω |
| C_L | 15 pF | 30 pF | 30 pF |

Note: C_L includes probe and jig capacitance.



Waveforms

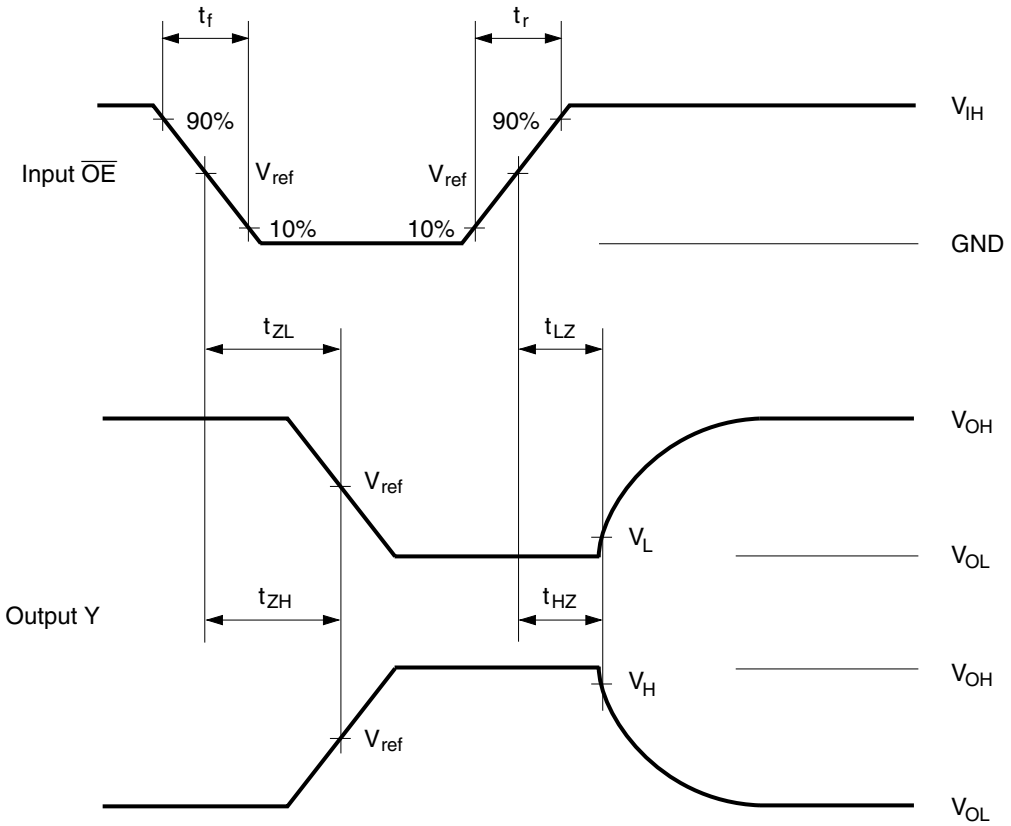

| Symbol | $V_{CC} = 1.2 \text{ V},$ $1.5 \pm 0.1 \text{ V}$ | $V_{CC} = 1.8 \pm 0.15 \text{ V}$ | $V_{CC} = 2.5 \pm 0.2 \text{ V}$ | $V_{CC} = 3.3 \pm 0.3 \text{ V}$ |
|-------------|--|--|--|--|
| t_r / t_f | 2.0 ns | 2.0 ns | 2.5 ns | 2.5 ns |
| V_{IH} | V_{CC} | V_{CC} | V_{CC} | 2.7 V |
| V_{ref} | 50% | 50% | 50% | 1.5 V |
| V_H / V_L | $V_H = V_{OH} - 0.1 \text{ V}$ $V_L = V_{OL} + 0.1 \text{ V}$ | $V_H = V_{OH} - 0.15 \text{ V}$ $V_L = V_{OL} + 0.15 \text{ V}$ | $V_H = V_{OH} - 0.15 \text{ V}$ $V_L = V_{OL} + 0.15 \text{ V}$ | $V_H = V_{OH} - 0.3 \text{ V}$ $V_L = V_{OL} + 0.3 \text{ V}$ |

Note: Input waveform : PRR = 10 MHz, duty cycle 50%

Package Dimensions

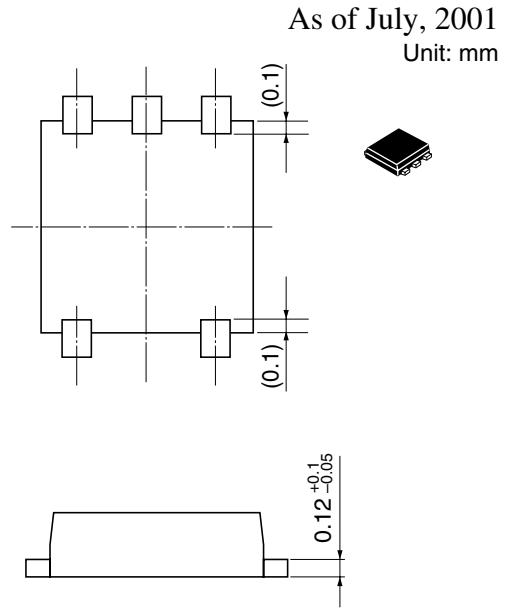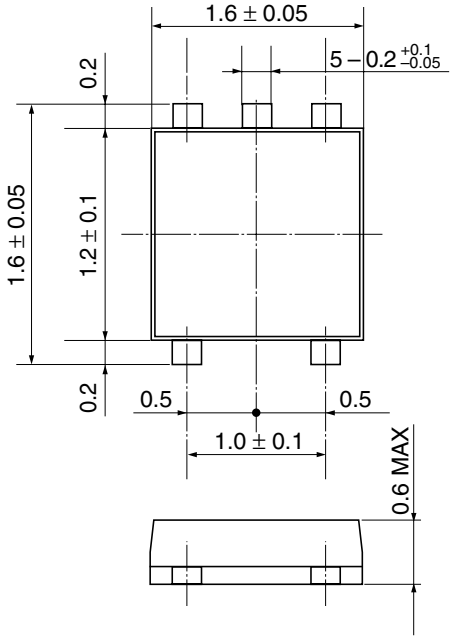

| | |
|------------------------|---------|
| Hitachi Code | TNP-5D |
| JEDEC | — |
| JEITA | — |
| Mass (reference value) | 0.002 g |

Disclaimer

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

Sales Offices

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits
 Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
 Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL <http://www.hitachisemiconductor.com/>

For further information write to:

Hitachi Semiconductor (America) Inc.
 179 East Tasman Drive
 San Jose, CA 95134
 Tel: <1> (408) 433-1990
 Fax: <1> (408) 433-0223

Hitachi Europe Ltd.
 Electronic Components Group
 Whitebrook Park
 Lower Cookham Road
 Maidenhead
 Berkshire SL6 8YA, United Kingdom
 Tel: <44> (1628) 585000
 Fax: <44> (1628) 585200

Hitachi Asia Ltd.
 Hitachi Tower
 16 Collyer Quay #20-00
 Singapore 049318
 Tel : <65>-538-6533/538-8577
 Fax : <65>-538-6933/538-3877
 URL : <http://semiconductor.hitachi.com.sg>

Hitachi Asia (Hong Kong) Ltd.
 Group III (Electronic Components)
 7/F., North Tower
 World Finance Centre,
 Harbour City, Canton Road
 Tsim Sha Tsui, Kowloon Hong Kong
 Tel : <852>-(2)-735-9218
 Fax : <852>-(2)-730-0281
 URL : <http://semiconductor.hitachi.com.hk>

Hitachi Europe GmbH
 Electronic Components Group
 Dornacher Straße 3
 D-85622 Feldkirchen
 Postfach 201, D-85619 Feldkirchen
 Germany
 Tel: <49> (89) 9 9180-0
 Fax: <49> (89) 9 29 30 00

Hitachi Asia Ltd.
 (Taipei Branch Office)
 4/F, No. 167, Tun Hwa North Road
 Hung-Kuo Building
 Taipei (105), Taiwan
 Tel : <886>-(2)-2718-3666
 Fax : <886>-(2)-2718-8180
 Telex : 23222 HAS-TP
 URL : <http://www.hitachi.com.tw>

Copyright © Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.
 Colophon 5.0