

IN74AC164


8-Bit Serial-Input/Parallel-Output Shift register

High-Speed Silicon-Gate CMOS

The IN74AC164 is identical in pinout to the LS/ALS164, HC/HCT164. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LS/ALS outputs.

The IN74AC164 is an 8-bit, serial-input to parallel-output shift register. Two serial data inputs, A1 and A2, are provided so that one input may be used as a data enable. Data is entered on each rising edge of the clock. The active-low asynchronous Reset overrides the Clock and Serial Data inputs.

- Outputs Directly Interface to CMOS, NMOS, and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1.0 μ A; 0.1 μ A @ 25°C
- High Noise Immunity Characteristic of CMOS Devices
- Outputs Source/Sink 24 mA




ORDERING INFORMATION

IN74AC164N Plastic
IN74AC164D SOIC

$T_A = -40^\circ$ to 85° C for all packages

LOGIC DIAGRAM

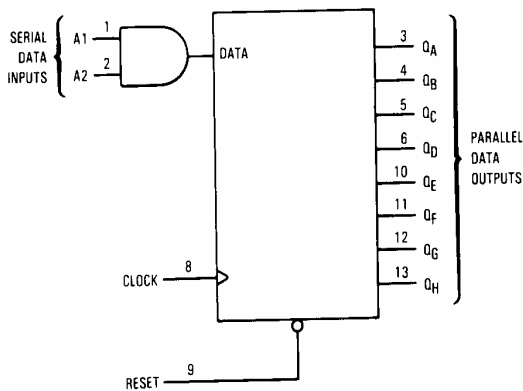

PIN 14 = V_{CC}
PIN 7 = GND

PIN ASSIGNMENT

| | | | |
|-------|---|----|----------|
| A1 | 1 | 14 | V_{CC} |
| A2 | 2 | 13 | Q_H |
| Q_A | 3 | 12 | Q_G |
| Q_B | 4 | 11 | Q_F |
| Q_C | 5 | 10 | Q_E |
| Q_D | 6 | 9 | RESET |
| GND | 7 | 8 | CLOCK |

FUNCTION TABLE

| Inputs | | | | Outputs | |
|--------|-------|----|----|-----------|-----------------------|
| Reset | Clock | A1 | A2 | Q_A | $Q_B \dots Q_H$ |
| L | X | X | X | L | L ... L |
| H | | X | X | no change | |
| H | | H | D | D | $Q_{An} \dots Q_{Gn}$ |
| H | | D | H | D | $Q_{An} \dots Q_{Gn}$ |

D = data input
X = don't care
 $Q_{An} - Q_{Gn}$ = data shifted from the previous stage on a rising edge at the clock input.

IN74AC164

MAXIMUM RATINGS*

| Symbol | Parameter | Value | Unit |
|-----------|---|------------------------|--------------------|
| V_{CC} | DC Supply Voltage (Referenced to GND) | -0.5 to +7.0 | V |
| V_{IN} | DC Input Voltage (Referenced to GND) | -0.5 to $V_{CC} + 0.5$ | V |
| V_{OUT} | DC Output Voltage (Referenced to GND) | -0.5 to $V_{CC} + 0.5$ | V |
| I_{IN} | DC Input Current, per Pin | ± 20 | mA |
| I_{OUT} | DC Output Sink/Source Current, per Pin | ± 50 | mA |
| I_{CC} | DC Supply Current, V_{CC} and GND Pins | ± 50 | mA |
| P_D | Power Dissipation in Still Air, Plastic DIP+ SOIC Package+ | 750 500 | mW |
| Tstg | Storage Temperature | -65 to +150 | $^{\circ}\text{C}$ |
| T_L | Lead Temperature, 1 mm from Case for 10 Seconds (Plastic DIP or SOIC Package) | 260 | $^{\circ}\text{C}$ |

*Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.

+Derating - Plastic DIP: - 10 mW/ $^{\circ}\text{C}$ from 65 $^{\circ}$ to 125 $^{\circ}\text{C}$

SOIC Package: : - 7 mW/ $^{\circ}\text{C}$ from 65 $^{\circ}$ to 125 $^{\circ}\text{C}$

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Min | Max | Unit | |
|-------------------|---|--|-------------|--------------------|------|
| V_{CC} | DC Supply Voltage (Referenced to GND) | 2.0 | 6.0 | V | |
| V_{IN}, V_{OUT} | DC Input Voltage, Output Voltage (Referenced to GND) | 0 | V_{CC} | V | |
| T_J | Junction Temperature (PDIP) | | 140 | $^{\circ}\text{C}$ | |
| T_A | Operating Temperature, All Package Types | -40 | +85 | $^{\circ}\text{C}$ | |
| I_{OH} | Output Current - High | | -24 | mA | |
| I_{OL} | Output Current - Low | | 24 | mA | |
| t_r, t_f | Input Rise and Fall Time * (except Schmitt Inputs) | $V_{CC} = 3.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 5.5 \text{ V}$ | 0 0 0 | 150 40 25 | ns/V |

* V_{IN} from 30% to 70% V_{CC}

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{IN} and V_{OUT} should be constrained to the range $\text{GND} \leq (V_{IN} \text{ or } V_{OUT}) \leq V_{CC}$.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

IN74AC164

DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

| Symbol | Parameter | Test Conditions | V _{CC} V | Guaranteed Limits | | Unit |
|-------------------------|--|--|----------------------|-------------------|---------------|------|
| | | | | 25 °C | -40°C to 85°C | |
| V _{IH} | Minimum High-Level Input Voltage | V _{OUT} =0.1 V or V _{CC} -0.1 V | 3.0 | 2.1 | 2.1 | V |
| | | | 4.5 | 3.15 | 3.15 | |
| | | | 5.5 | 3.85 | 3.85 | |
| V _{IL} | Maximum Low-Level Input Voltage | V _{OUT} =0.1 V or V _{CC} -0.1 V | 3.0 | 0.9 | 0.9 | V |
| | | | 4.5 | 1.35 | 1.35 | |
| | | | 5.5 | 1.65 | 1.65 | |
| V _{OH} | Minimum High-Level Output Voltage | I _{OUT} ≤ -50 μA | 3.0 | 2.9 | 2.9 | V |
| | | | 4.5 | 4.4 | 4.4 | |
| | | | 5.5 | 5.4 | 5.4 | |
| | | *V _{IN} =V _{IH} or V _{IL} | | | | |
| | | I _{OH} =-12 mA | 3.0 | 2.56 | 2.46 | |
| | | I _{OH} =-24 mA | 4.5 | 3.86 | 3.76 | |
| I _{OH} =-24 mA | 5.5 | 4.86 | 4.76 | | | |
| V _{OL} | Maximum Low-Level Output Voltage | I _{OUT} ≤ 50 μA | 3.0 | 0.1 | 0.1 | V |
| | | | 4.5 | 0.1 | 0.1 | |
| | | | 5.5 | 0.1 | 0.1 | |
| | | *V _{IN} =V _{IH} or V _{IL} | | | | |
| | | I _{OL} =12 mA | 3.0 | 0.36 | 0.44 | |
| | | I _{OL} =24 mA | 4.5 | 0.36 | 0.44 | |
| I _{OL} =24 mA | 5.5 | 0.36 | 0.44 | | | |
| I _{IN} | Maximum Input Leakage Current | V _{IN} =V _{CC} or GND | 5.5 | ±0.1 | ±1.0 | μA |
| I _{OLD} | +Minimum Dynamic Output Current | V _{OLD} =1.65 V Max | 5.5 | | 75 | mA |
| I _{OHD} | +Minimum Dynamic Output Current | V _{OHD} =3.85 V Min | 5.5 | | -75 | mA |
| I _{CC} | Maximum Quiescent Supply Current (per Package) | V _{IN} =V _{CC} or GND | 5.5 | 4.0 | 40 | μA |

* All outputs loaded; thresholds on input associated with output under test.

+Maximum test duration 2.0 ms, one output loaded at a time.

Note: I_{IN} and I_{CC} @ 3.0 V are guaranteed to be less than or equal to the respective limit @ 5.5 V V_{CC}

IN74AC164

AC ELECTRICAL CHARACTERISTICS ($C_L=50\text{pF}$, Input $t_r=t_f=3.0\text{ ns}$)

| Symbol | Parameter | V_{CC} V | Guaranteed Limits | | | | Unit |
|-----------|--|---------------|-------------------|--------------|---------------|--------------|------|
| | | | 25 °C | | -40°C to 85°C | | |
| | | | Min | Max | Min | Max | |
| f_{max} | Maximum Clock Frequency (Figure 1) | 3.3 5.0 | 125 150 | | 100 125 | | MHz |
| t_{PLH} | Propagation Delay, Clock to Q (Figure 1) | 3.3 5.0 | 4.0 2.5 | 13.5 10.0 | 3.5 2.0 | 16.0 10.5 | ns |
| t_{PHL} | Propagation Delay, Clock to Q (Figure 1) | 3.3 5.0 | 3.0 2.0 | 14.0 10.0 | 3.0 1.5 | 14.5 10.5 | ns |
| t_{PHL} | Propagation Delay, Reset to Q (Figure 2) | 3.3 5.0 | 3.0 2.0 | 12.0 9.5 | 3.0 2.0 | 13.5 10.5 | ns |
| C_{IN} | Maximum Input Capacitance | 5.0 | 4.5 | | 4.5 | | pF |

| C_{PD} | Power Dissipation Capacitance | Typical @25°C, $V_{CC}=5.0\text{ V}$ | | pF |
|----------|-------------------------------|--------------------------------------|--|----|
| | | 35 | | |
| | | | | |

*Voltage Range 3.3 V is 3.3 V \pm 0.3 V

Voltage Range 5.0 V is 5.0 V \pm 0.5 V

TIMING REQUIREMENTS ($C_L=50\text{pF}$, Input $t_r=t_f=3.0\text{ ns}$)

| Symbol | Parameter | V_{CC} V | Guaranteed Limits | | Unit | |
|-----------|---|---------------|-------------------|------------|------|---------------|
| | | | 25 °C | | | -40°C to 85°C |
| | | | | | | |
| t_{su} | Minimum Setup Time, A1 or A2 to Clock (Figure 3) | 3.3 5.0 | 6.5 4.5 | 7.5 5.0 | ns | |
| t_h | Minimum Hold Time, Clock to A1 or A2 (Figure 3) | 3.3 5.0 | 0 0.5 | 0 0.5 | ns | |
| t_w | Minimum Pulse Width, Clock or Reset (Figures 1,2) | 3.3 5.0 | 4.0 3.5 | 4.5 3.5 | ns | |
| t_{rec} | Minimum Recovery Time, Reset to Clock (Figure 2) | 3.3 5.0 | 0 0 | 0 0 | ns | |

*Voltage Range 3.3 V is 3.3 V \pm 0.3 V

Voltage Range 5.0 V is 5.0 V \pm 0.5 V

IN74AC164

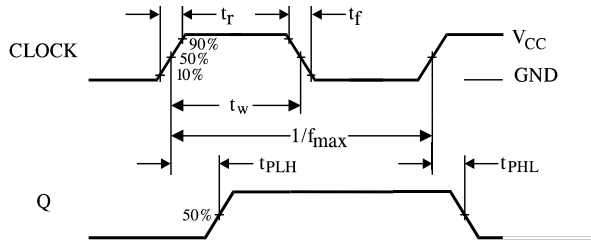


Figure 1. Switching Waveforms

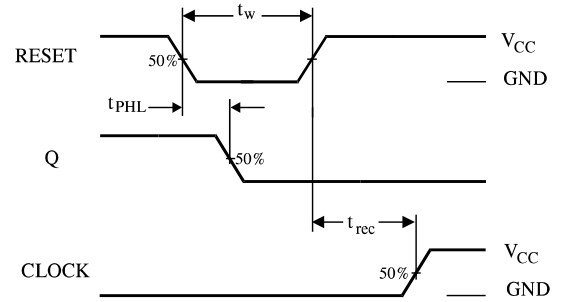


Figure 2. Switching Waveforms


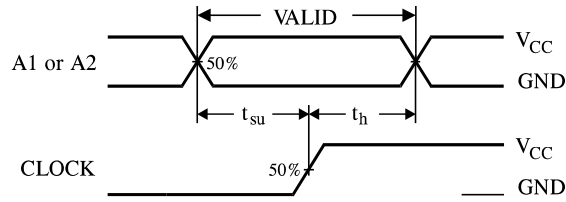


Figure 3. Switching Waveforms
TIMING DIAGRAM



EXPANDED LOGIC DIAGRAM

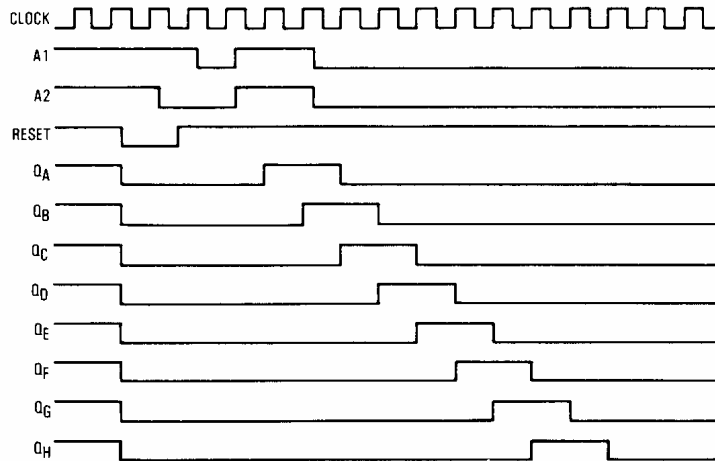