
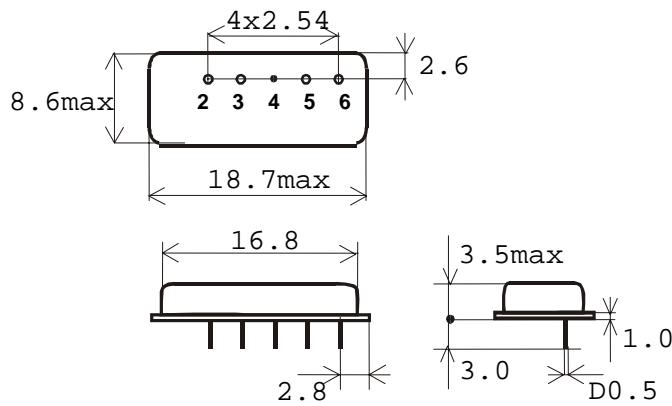


K2011

IF filter for intercarrier application  
(IF= 38.0 MHz. standard B/G-CCIR, D/K-OIRT)

Package SIP6M

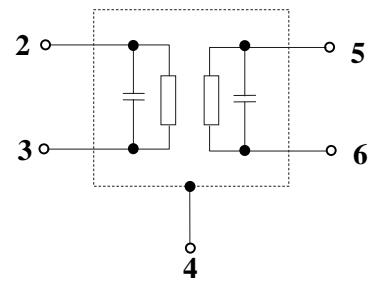

Pin configuration

2 - Input

3 - Input - ground

4 - Chip carrier - ground

5 - Output


6 - Output

Characteristics (measuring conditions: T=25°C, Z<sub>source</sub>=50 Ω, Z<sub>load</sub>=2kΩ//3pF)

Parameter		min.	max.	type	unit
Insertion attenuation at (reference level for the following data)	36,5MHz		16,7	15,2	dB
Relative attenuation:					
Picture carrier	38,0 MHz	5,5	7,5	6,5	dB
Color carrier	33,57 MHz		1,8	0,8	dB
	33,3 MHz		3,2	2,2	dB
Sound carrier	31,5 MHz	13	15,5	14	dB
	32,5 MHz	14	17	15,5	dB
Lower sidelobe	15,0-30,0 MHz	40		44	dB
Adjacent picture carrier	30,0 MHz	45		50	dB
Adjacent sound carrier	39,5 MHz	40		50	dB
Upper sidelobe	39,5-42,0 MHz	40		44	dB
	42,0-56 MHz	40		42	dB
Amplitude ripple:					
	31,4-31,6 MHz		2,0	0,6	dB
	32,4-32,6 MHz		3,5	2,5	dB
	33,57-37,0 MHz		0,5	0,7	dB
Reflected wave signal suppression 1,2 -6,0 μs after main pulse ( test pulse: 250 ns, carrier frequency 36,5 MHz)		40		46	dB
Feedthrough signal suppression 0,9 – 1,2 μs before main pulse (test pulse: 250 ns, carrier frequency 36,5 MHz)		40		52	dB
Impedance at	36,5MHz				
Input	Z <sub>in</sub> =R <sub>in</sub> // C <sub>in</sub>			1,3//13,0	kΩ//pF
Output	Z <sub>out</sub> =R <sub>out</sub> // C <sub>out</sub>			3,0//5,0	kΩ//pF
Group delay predistortion (reference frequency 38,0 MHz)					
	33,57MHz			0	ns
	35,9 MHz			-50	ns
Temperature coefficient of frequency				-72	ppm/°K


## Frequency response

Amplitude

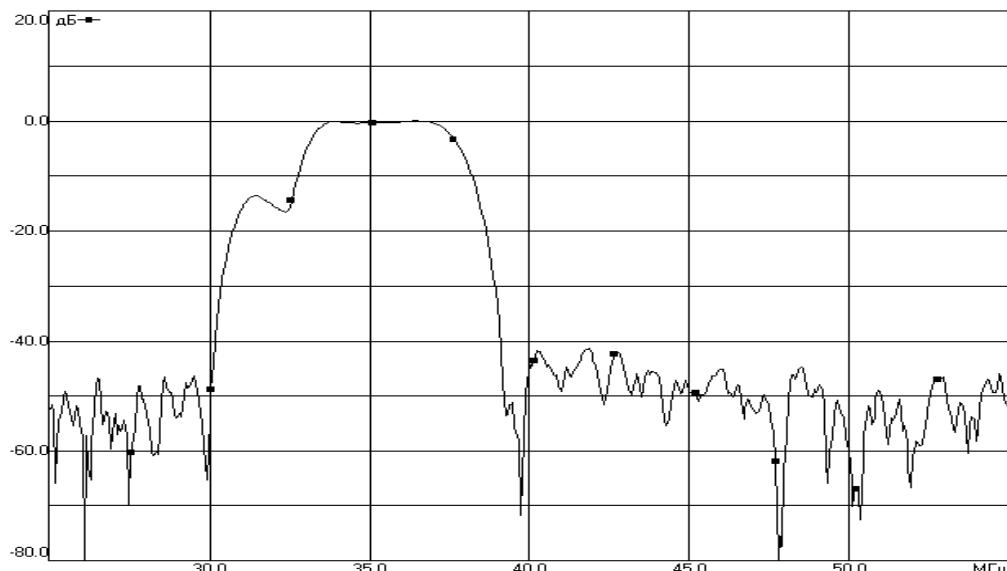

Frequency

Amplitude

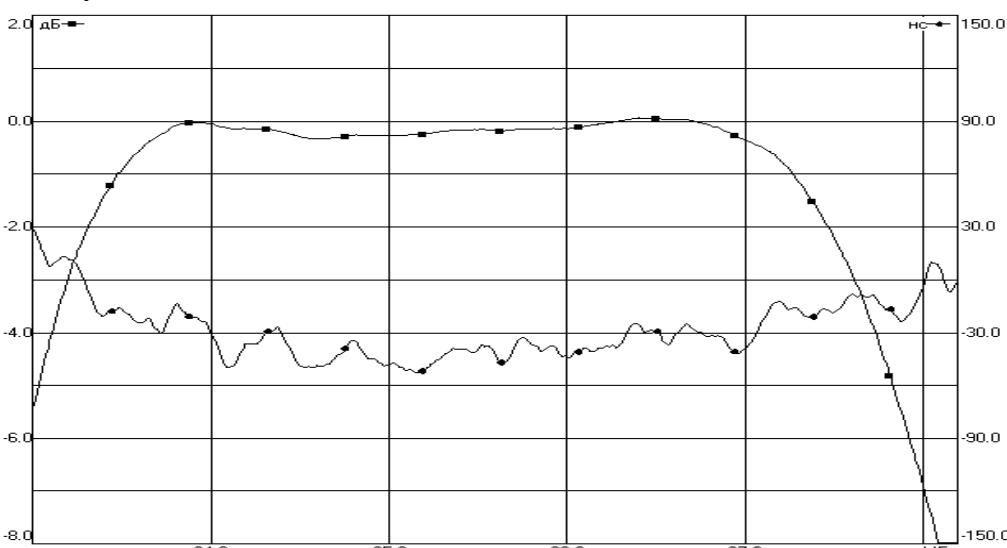

Frequency

## Maximum ratings

Min ambient temperature	-10°C
Max ambient temperature	55°C
Min storage temperature	-60°C
Max storage temperature	55°C
DC voltage ( between any terminals)	12 V
AC voltage ( between any terminals)	10 V