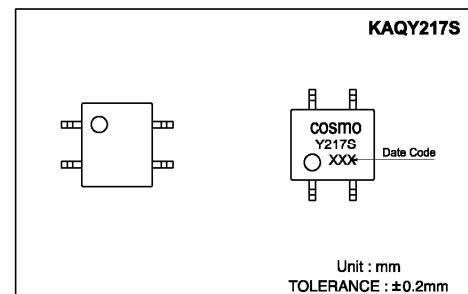


COSMO**High Voltage, Solid State Relay-MOSFET Output KAQY217S**



UL 1577/ UL 508 (File No.E108430), FI EN60950 (File No.FI13698)

Features

1. Normally Open, Single Pole Single Throw
2. Control 200VAC or DC Voltage
3. Switch 180mA Loads
4. LED control Current, 5mA
5. Low ON-Resistance
6. dv/dt, >500V/ms
7. Isolation Test Voltage, 1500VACrms

**Absolute Maximum Ratings**

Emitter (Input)	Detector (Output)
Reverse Voltage.....	5.0V
Continuous Forward Current.....	50mA
Peak Forward Current.....	1A
Power Dissipation.....	75mW
Derate Linearly from 25°C.....	1.3mW/°C
General Characteristics	
Isolation Test Voltage.....	1500VACrms
Isolation Resistance	Storage Temperature Range.... -40°C to +150°C
V _{IO} =500V, T _a =25°C.....	Operating Temperature Range.... -40°C to +85°C
Total Power Dissipation.....	Junction Temperature..... 100°C
Derate Linearly from 25°C.....	Soldering Temperature, 2mm from case, 10 sec..... 260°C

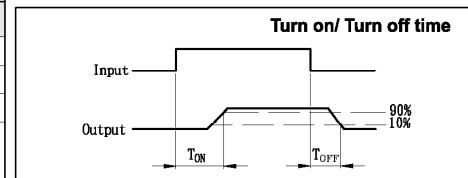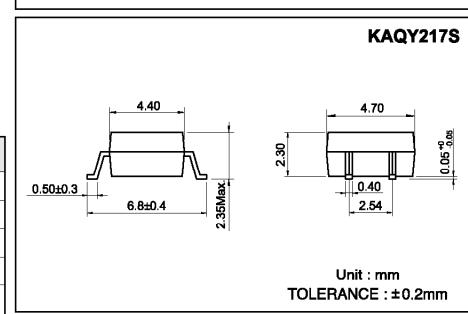**Electro-optical Characteristics**(T_a=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Emitter (Input)						
Forward Voltage	V _F	I _F = 10mA		1.2	1.5	V
Operation Input Current	I _{FORN}	V _L = ±20V, I _L = 100mA, t = 10ms		1.5	5	mA
Recovery Input Current	I _{FOFF}	V _L = ±20V, I _L ≤ 5μA	0.2			mA
Detector (Output)						
Output Breakdown Voltage	V _B	I _B = 50μA	200			V
Output Off-State Leakage	I _{TOFF}	V _T = 100V, I _F = 0mA	0.2	1		μA
I/O Capacitance	C _{ISO}	I _F = 0, f = 1MHz	6			p F
ON Resistance	R _{ON}	I _L = 100mA, I _F = 10mA	6	15		Ω
Turn-On Time	T _{ON}	I _F = 10mA, V _L = ±20V	0.4	1.0		ms
Turn-Off Time	T _{OFF}	t = 10ms, I _L = ±100mA	0.3	1.0		ms

Schematic and Wiring Diagrams

Type	Schematic	Output configuration	Load	Connection	Wiring Diagrams
KAQY217S		1a	AC/DC	—	

Data Curve

Fig.1 Load current vs. ambient temperature
Allowable ambient temperature:
-40°C to +85°C




Fig.2 On resistance vs. ambient temperature
Across terminals 3 and 4 pin
LED current: 5mA
Continuous load current: 180mA(DC)




Fig.3 Turn on time vs. ambient temperature
Load voltage 200V(DC)
LED current: 5mA
Continuous load current: 180mA(DC)




Fig.4 Turn off time vs. ambient temperature
LED current: 5mA; Load voltage:
200V(DC)
Continuous load current: 180mA(DC)




Fig.5 LED operate vs. ambient temperature
Load voltage 200V(DC)
Continuous load current: 180mA(DC)




Fig.6 LED turn off current vs. ambient temperature
Load voltage 200V(DC)
Continuous load current: 180mA(DC)




Fig.7 LED dropout voltage vs. ambient temperature
LED current: 5 to 50mA




Fig.8 Voltage vs. current characteristics of output at MOS FET portion
Measured portion: across terminals 3 and 4 pin
Ambient temperature: 25°C




Fig.9 Off state leakage current
Across terminals 3 and 4 pin
Ambient temperature: 25°C




Fig.10 LED forward current vs. turn on time
Across terminals 3 and 4 pin;
Load voltage: 200V (DC);
Continuous load current: 180mA (DC);
Ambient temperature: 25°C




Fig.11 LED forward current vs. turn off time
Across terminals 3 and 4 pin;
Load voltage: 200V (DC);
Continuous load current: 180mA (DC);
Ambient temperature: 25°C




Fig.12 Applied voltage vs. output capacitance
Across terminals 3 and 4 pin
Frequency: 1MHz
Ambient temperature: 25°C

