
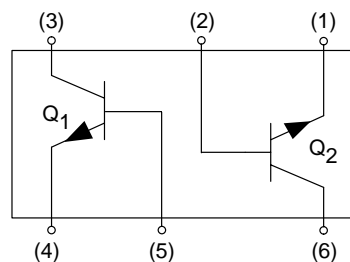


# High-Frequency Amplifier Transistor

## L2SC3837DW1T1

### ● Features

- 1.High transition frequency.( $f_T=1.5\text{GHz}$ )
- 2.Low output capacitance.( $C_{ob}=0.95\text{pF}$ )

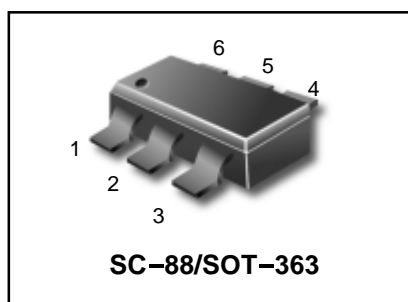

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	$V_{CBO}$	30	V
Collector-Emitter Voltage	$V_{CEO}$	18	V
Emitter-base voltage	$V_{EBO}$	3	V
Collector Current	$I_C$	50	mA
Collector power dissipation	$P_C$	150(TOTAL)	mW*
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55~+150	$^\circ\text{C}$

\* 120mW per element must not be exceeded.

### DEVICE MARKING

L2SC3837DW1T1=8P
------------------

### ELECTRICAL CHARACTERISTICS( $T_A = 25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Collector-base breakdown voltage	$BV_{CBO}$	30	-	-	V	$I_C=10\mu\text{A}$
Collector-emitter breakdown voltage	$BV_{CEO}$	18	-	-	V	$I_C=1\text{mA}$
Emitter-base breakdown voltage	$BV_{EBO}$	3	-	-	V	$I_E=10\mu\text{A}$
Collector cutoff current	$I_{CBO}$	-	-	0.5	$\mu\text{A}$	$V_{CB}=10\text{V}$
Emitter cutoff current	$I_{EBO}$	-	-	0.5	$\mu\text{A}$	$V_{EB}=2\text{V}$
DC current transfer ratio	$h_{FE}$	27	-	270	-	$V_{CE}/I_C=10\text{V}/10\text{mA}$
Collector-emitter saturation voltage	$V_{CE(sat)}$	-	-	0.5	V	$I_C/I_B=20\text{mA}/4\text{mA}$
$h_{FE}$ pairing	$h_{FE1}/h_{FE2}$	0.5	1	2	-	$V_{CE}/I_C=10\text{V}/10\text{mA}$
Transition frequency	fT	600	1500	-	MHz	$V_{CE}/I_C=10\text{V}/10\text{mA}, f=200\text{MHz}^*$
Output capacitance	Cob	-	0.95	1.6	pF	$V_{CB}/f=10\text{V}/1\text{MHz}, I_E=0\text{A}$


\*Transition frequency of the device.

**L2SC3837DW1T1**

SC-88/SOT-363

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

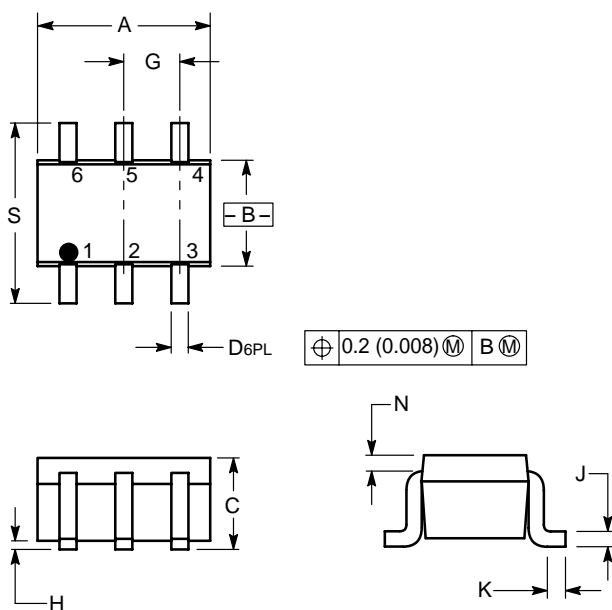

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.031	0.043	0.80	1.10
D	0.004	0.012	0.10	0.30
G	0.026 BSC		0.65 BSC	
H	---	0.004	---	0.10
J	0.004	0.010	0.10	0.25
K	0.004	0.012	0.10	0.30
N	0.008 REF		0.20 REF	
S	0.079	0.087	2.00	2.20

- PIN 1. EMITTER 2
- 2. BASE 2
- 3. COLLECTOR 1
- 4. EMITTER 1
- 5. BASE 1
- 6. COLLECTOR 2

