


PANEL DISPLAY UNITS

64 × 64 mm

φ 3 mm 16 × 16 Dots LNP123021

Outline Drawing

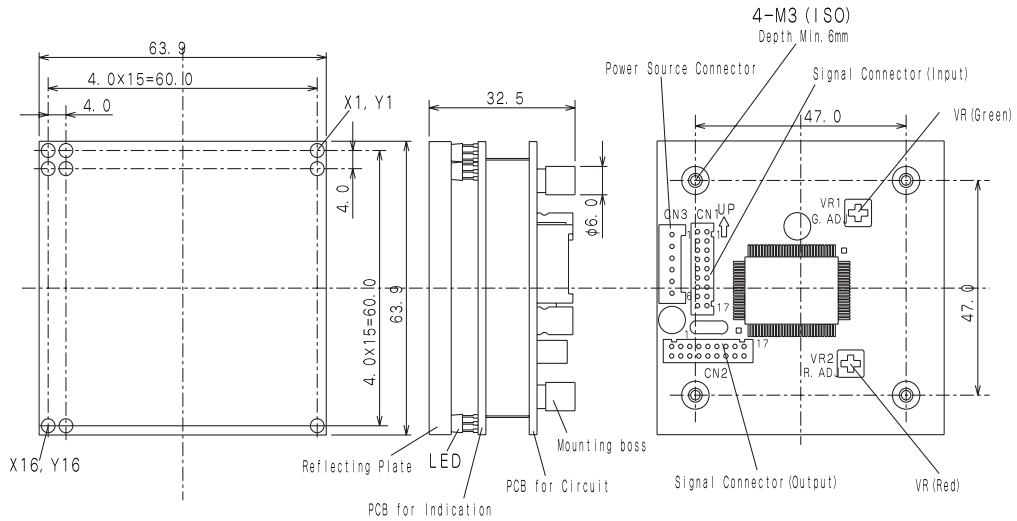

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Supply Voltage for Logic	V_{CC}	- 0.3 ~ + 6.0	V
Supply Voltage for LED	V_{LED}	Max 5.5	V
Input Voltage	V_{in}	- 0.3 ~ V_{CC} + 0.3	V
Operating Ambient Temperature	T_{opr}	- 10 ~ + 45	°C
Storage Temperature	T_{stg}	- 25 ~ + 85	°C

Main Specifications (Ta = 25°C)

Item	Symbol	Ratings	Unit
Display Colors		Red, Green, Amber	
Dot Diameter		φ 3.0	mm
Dots Pitch		4.0	mm
Dot Total Number		256 (16 × 16)	
Display Surface Size		64 × 64	mm
Brightness (when lighting all lamps)	B	Red : 400 Green : 300 Controllable	cd/m ²
Operating Method		1/16(Duty) Dynamic lighting	
Clock Frequency	CLK	Max 20	MHz
for Logic	Supply Voltage	V_{CC}	5.0 ± 0.5 V
	Supply Current	I_{CC}	Max 30 mA
for LED	Supply Voltage	V_{LED}	5.0 ± 0.2 V
	Supply Current	I_{LED}	Max 6.5 when two colors are all turned "ON" A
Weight		90	g