


# フルカラー屋外用大型 LED ランプ FULL COLOR LED LAMP FOR OUTDOOR USE

## 30 mm × 30 mm LNQ70403

### 外形図

#### Outline Drawing

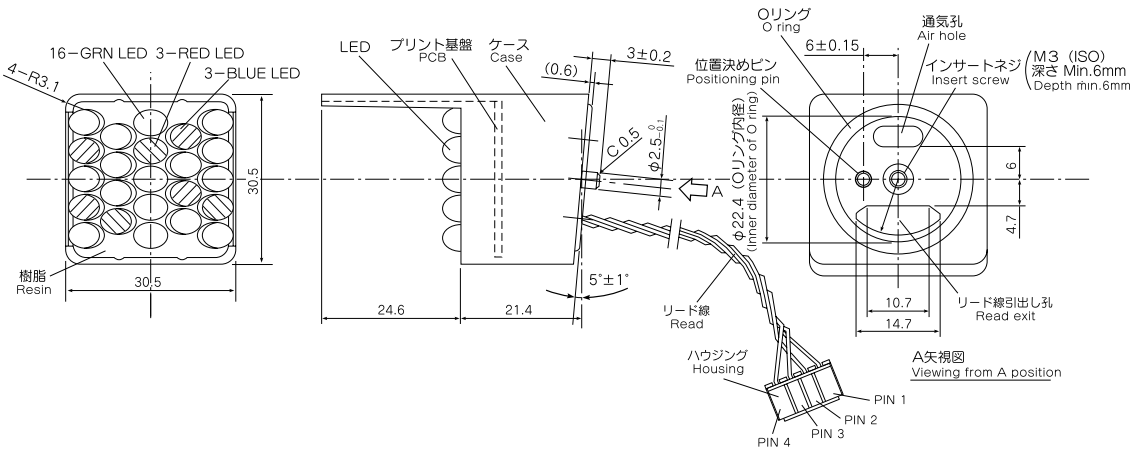

#### 絶対最大定格 Absolute Maximum Ratings (Ta = 25°C)

項目	Item	Symbol	条件 Conditions	定格 Ratings	Unit
順方向電流 Supply Current for LED	I <sub>R</sub>	Red	25 mA × 1	25	mA
		Green	35 mA × 4	140	mA
		Blue	25 mA × 2	50	mA
逆方向電圧 Reverse Voltage	V <sub>R</sub>	Red		9	V
		Green		16	V
		Blue		10	V
動作周囲温度 Operating Ambient Temperature	Topr			- 20 ~ + 60	°C
保存温度 Storage Temperature	Tstg			- 30 ~ + 80	°C

#### 主なる仕様 Main Specifications (Ta = 25°C)

項目	Item	Symbol	条件 Conditions	定格 Ratings	Unit
順方向電圧 Forward Voltage	V <sub>F</sub>	Red	I <sub>F</sub> = 20 mA	Typ 5.4	V
		Green	I <sub>F</sub> = 120 mA	Typ 8.8	V
		Blue	I <sub>F</sub> = 40 mA	Typ 8.0	V
逆方向電流 Reverse Current	I <sub>R</sub>	Red	V <sub>R</sub> = 9 V	Max 100	μ A
		Green	V <sub>R</sub> = 16 V	Max 40	μ A
		Blue	V <sub>R</sub> = 10 V	Max 100	μ A
ピーク発光波長 Peak Emission Wavelength	λ <sub>p</sub>	Red	I <sub>F</sub> = 20 mA	Typ 650	nm
		Green	I <sub>F</sub> = 120 mA	Typ 565	nm
		Blue	I <sub>F</sub> = 40 mA	Typ 450	nm
光度 Luminous Intensity	I <sub>O</sub>	Red	I <sub>F</sub> = 20 mA	Typ 0.8	cd
		Green	I <sub>F</sub> = 120 mA	Typ 4.6	cd
		Blue	I <sub>F</sub> = 40 mA	Typ 1.3	cd
1/2 光度 Viewing Angle (50 % Luminouse)	2θ 1/2	Red		70.0	°
		Green		70.0	
		Blue		70.0	
質量 Mass				30	g