

T1/E1/CEPT/ISDN-PRI TRANSFORMER

Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms

Turns Ratio: (1-2):(3-4):(5-6) = 1:1:1 ±5%

Pri. OCL: 1.2mH Min. @100KHz 50mV


Leakage Inductance: 0.50uH Max. @100KHz 50mV

Cw/w: 25pF Max.


Pri. DCR: 0.70 Ohms Max

Sec. DCR: 0.70 Ohms Max.

Mechanicals

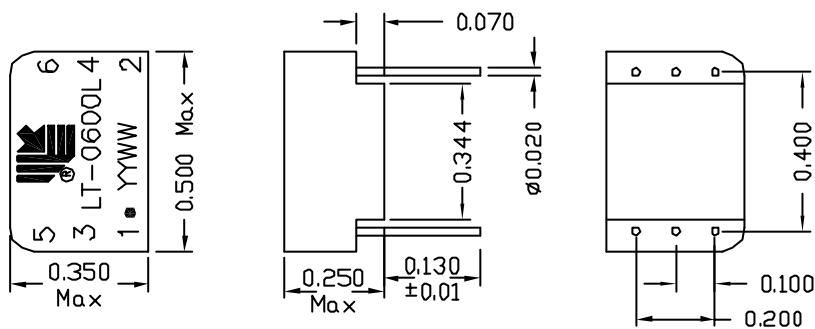

Schematics:

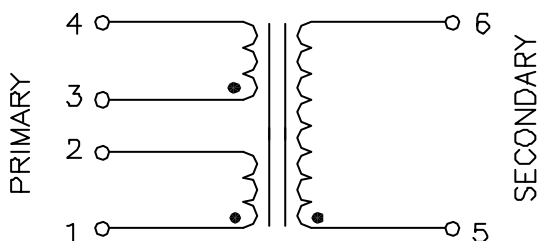

Specification subject to change without notice

P/N: LT-0600L	DIMENSIONS IN INCH	Unless otherwise specified Dim. Tolerances are: .xxx ±0.010	REV: B1	DRWN:	DATE: 03/07/25
	SCALE: NONE		PAGE: 1/1	APPD:	DATE: