

All information is subject to change without notice. Please read bottom notes.


RoHS compatible

**FEATURES :** (1) Analog RGB input (H-line inverted)  
(2) Wide Viewing angle & Low power  
(3) Slim ,Thin ,and light weight design

Specification

TENTATIVE

Display size	5.0 type(13cm)
Number of Pixels	400(W) X 234(H) (WQVGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.276(W) X 0.266(H)
Luminance (typ.)	240 cd/m <sup>2</sup> at I <sub>L</sub> =25mA(rms)
Response Time (max.)	T <sub>ON</sub> =11ms, T <sub>OFF</sub> =22ms
Contrast	300
Viewing Angle (CR≥10)	Vertical : 90 degree, Horizontal : 120 degree
I/F Format & Supply voltage	Analog,CMOS RGB 6bit ,H/V sync+DE, V <sub>DD</sub> =3.3V
Operating Temperature	-20 to 60 degree C
Outline dimension (mm)	123.4(W) X 76.5(H) X 3.8(D)mm
Weight (approximately)	67g
Backlight	Sidelight (LED 8pcs)
Power Consumption	0.4W (Except the efficiency of FL inverter)

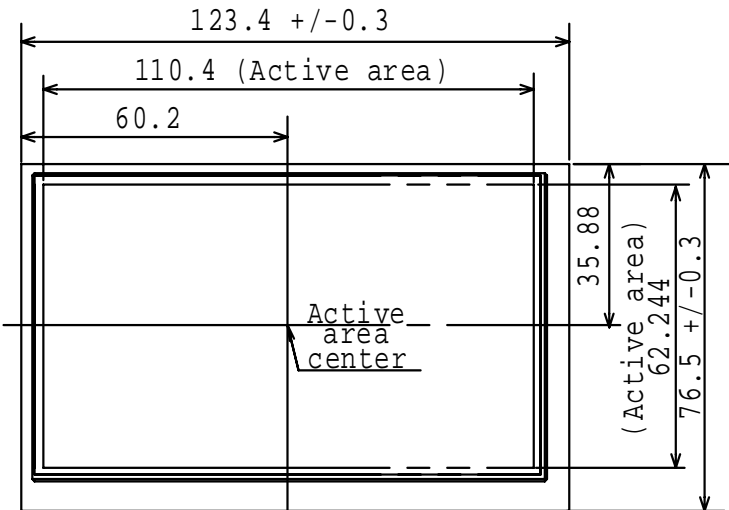

Rev.0.5R (2007/03/22)

\*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

\*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.