


Professional Microphone Cable - XL

- ▶ very low capacitance (60 pF/m)
- ▶ extremely flexible
- ▶ extra heavy overall sheath

MC2000

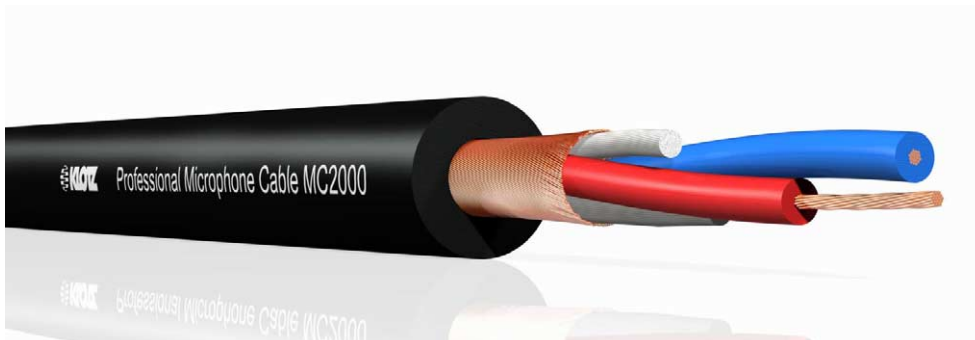

▶ construction

| | |
|-------------------------|--|
| Order No. | MC2000SW /-RT /-BL |
| Conductor | 28 x 0.10 mm Ø bare copper |
| Conductor Cross Section | 0.22 mm ² |
| Insulation | PE |
| Core Arrangement | 2 cores + cotton tracers twisted |
| Shielding | bare copper spiral shield |
| Jacket | PVC lead free, matt colors: black, red and blue |
| Outer Diameter | 6.5 mm |

▶ mechanic

| | |
|---------------------|-----------------|
| Weight | 50 g/m |
| Working Temperature | -25 °C / +70 °C |
| Min. Bending Radius | 30 mm |
| Max. Reel Length | 100 m / 1000 m |

▶ electric

| | |
|------------------------|---------------|
| Conductor Resistance | < 85 Ω / km |
| Capacitance | |
| Cond./Cond. | 60 pF / m |
| Cond./Screen | 110 pF / m |
| Max. Operating Voltage | 250 V |
| Insulation Resistance | > 100 MΩ x km |