

# Monolithic crystal filter

## MQF70.0-2000/01



### Application

- 2 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

### Limiting values

		Unit	Value
Center frequency	$f_0$	MHz	70.0
Insertion loss		dB	$\leq 2.0$
Pass band at 3.0 dB		kHz	$\pm 10.00$
Ripple in pass band	$f_0 \pm 7.00$ kHz	dB	$\leq 1.0$
Stop band attenuation	$f_0 \pm 30$ kHz	dB	$\geq 15$
Alternate attenuation	$f_0 - 910$ kHz	dB	$> 35$


### Terminating impedance Z

R1    C1	Ohm/pF	2500    -1
R2    C2	Ohm/pF	2500    -1



Operating temp. range	$^{\circ}\text{C}$	-20... +70
-----------------------	--------------------	------------

### Characteristics MQF70.0-2000/01

#### Pass band

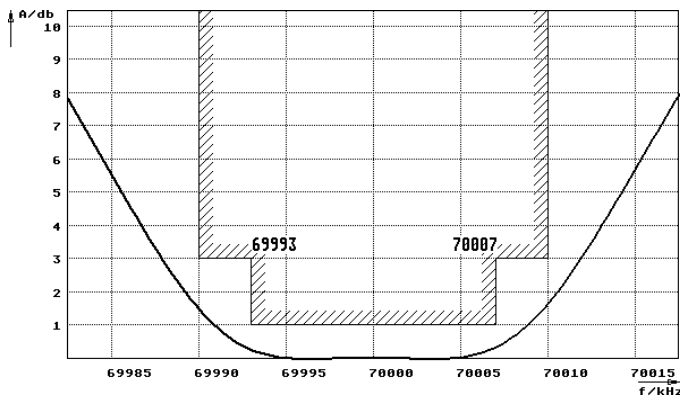

#### Stop band

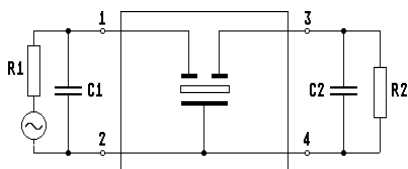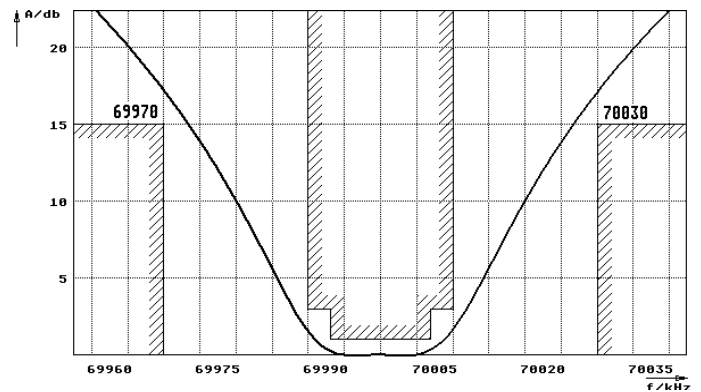

Pin connections: 1 Input  
2 Input-E  
3 Output  
4 Output-E

