

## MT2303B-UG

### Features


High Intensity  
 Reliable Rugged  
 Low Current Requirements  
 IC Compatible

### Maximum Ratings (Ta=25°C)

| Characteristic        | Symbol           | Max.           | Unit |
|-----------------------|------------------|----------------|------|
| Forward Current       | I <sub>F</sub>   | 20             | mA   |
| Reverse Voltage       | V <sub>R</sub>   | 5              | V    |
| Power Dissipation     | P <sub>D</sub>   | 80.00          | mW   |
| Operating Temperature | T <sub>opr</sub> | -25 ~ +85      | °C   |
| Storage Temperature   | T <sub>stg</sub> | -40 ~ +100     | °C   |
| Soldering Temperature | T <sub>sol</sub> | 260            | °C   |
| Soldering Time        | -                | for 5 sec. max | -    |

### Opto-Electrical Characteristics (Ta=25°C)

| Characteristic           | Symbol            | Test Condition       | Min     | Typ     | Max  | Unit |
|--------------------------|-------------------|----------------------|---------|---------|------|------|
| Forward Voltage          | V <sub>F</sub>    | I <sub>F</sub> =20mA | -       | 3.60    | 4.00 | V    |
| Reverse Current          | I <sub>R</sub>    | V <sub>R</sub> =5V   | -       | -       | 50   | μ A  |
| Luminous Intensity       | I <sub>v</sub>    | I <sub>F</sub> =20mA | 2400.00 | 4000.00 | -    | mcd  |
| Viewing Angle            | 2θ <sup>1/2</sup> | -                    | -       | 25°     | -    | deg. |
| Peak Wavelength          | λ <sub>p</sub>    | I <sub>F</sub> =20mA | -       | 525     | -    | nm   |
| Dominant Wavelength      | λ <sub>d</sub>    | I <sub>F</sub> =20mA | -       | 530     | -    | nm   |
| Spectral Line Half Width | Δλ                | I <sub>F</sub> =20mA | -       | 35      | -    | nm   |

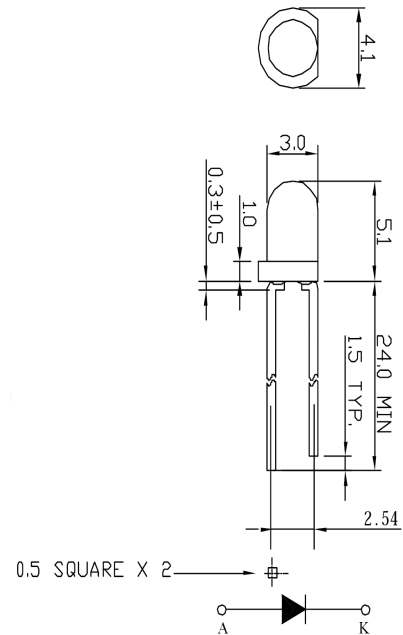


Notes:


1. All dimensions are in millimeters.
2. Tolerance is ±0.25mm unless otherwise noted.

MT2303B-UG Graphs


Typical Electrical / Optical Characteristics Curves :

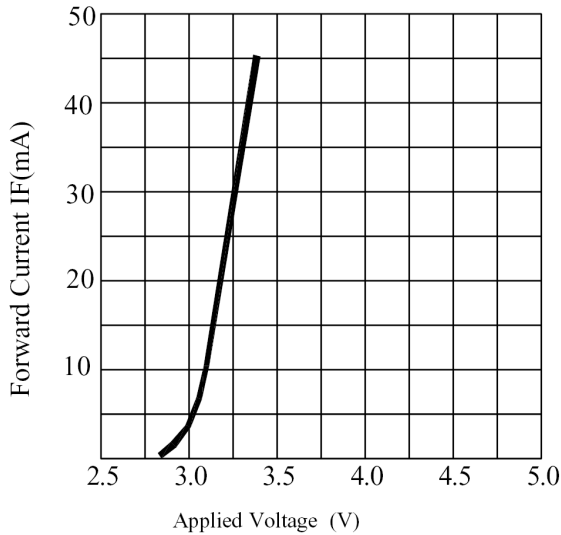


FORWARD CURRENT VS.APPLIED VOLTAGE

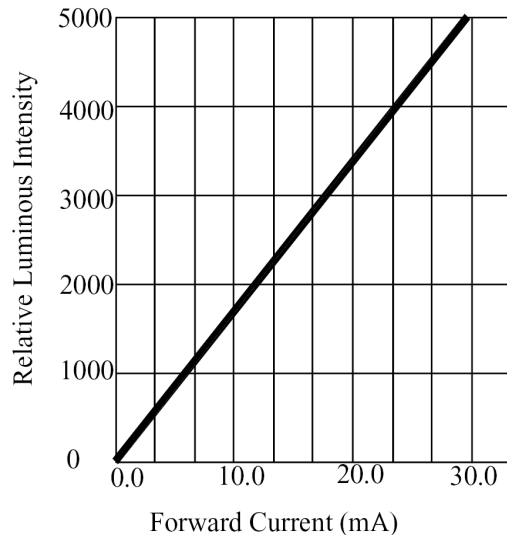

FORWARD CURRENT VS. LUMINOUS INTENSITY

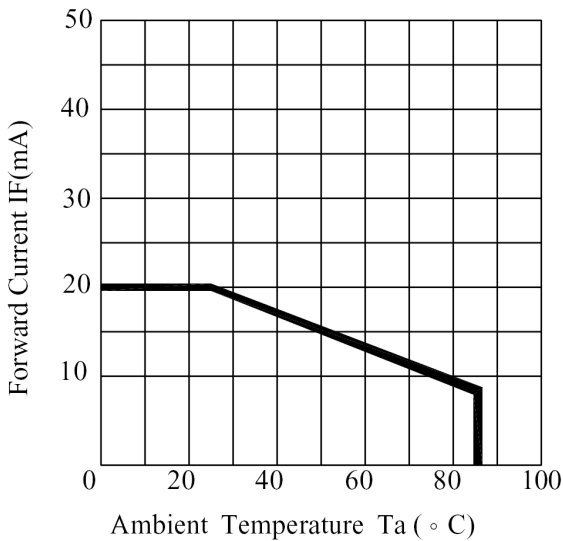

AMBIENT TEMPERATURE VS. FORWARD CURRENT

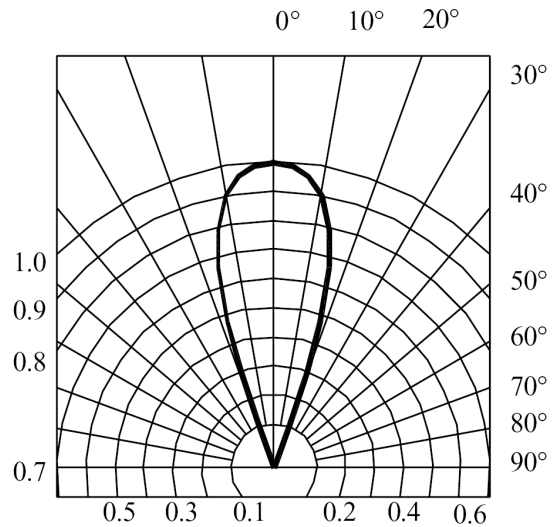

RADIATION DIAGRAM