


Features


Durable Acrylic Panel – Offers sturdy mechanical support and device stability.
 Design flexibility – Available in a variety sizes and colors to suit most any application.
 Low power consumption – Uses far less power than standard incandescent EL or CCFL light sources.
 Long lifetimes – Typically 100k hours.

Applications

Backlighting of LCD Displays Panels and Symbols
 Illumination of Large Surface Areas



A : ANODE / B : CATHODE

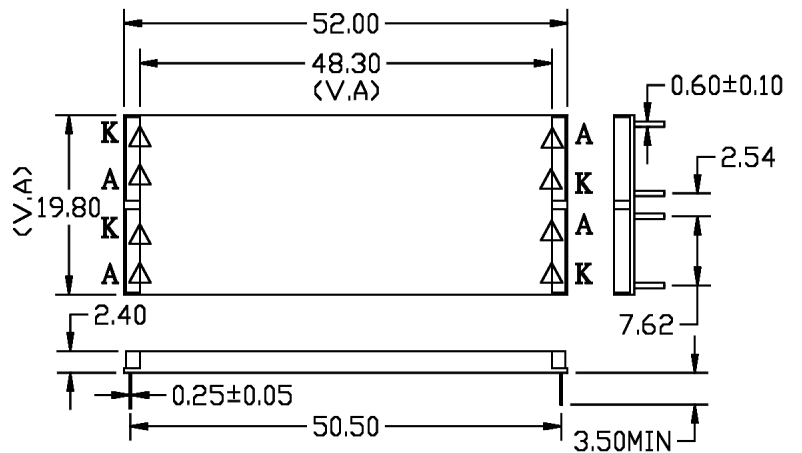

△=LED CHIP / LED NUMBERS : 2x4

Electrical and Optical Characteristics (Ta=25°C)

Part Number	PWL nm λP	Material	View Angle 2θ1/2	Luminous Intensity Iv				Forward Voltage VF			
				min.	typ.	max.	IF@	min.	typ.	max.	IF@
MTBL2411-G	574	InGaAlP	-	-	165.00	-	20mA	-	4.20	-	20mA
-	nm	-	deg	mcd				-	V		-