


### **SPNovaLED**<sup>™</sup>

Featuring a staggering brilliance and significant flux output, the SPNovaLED<sup>™</sup> showcases the latest technological advent in this range. With its extremely high level of brightness and the ultra low high profile, which is only 1.5 mm are highly suitable for both conventional lighting and specialized application such as automotive signal lights, traffic lights, channel lights, tube lights and garden lights among others.



### **Features:**

- > Super high brightness surface mount LED.
- > High flux output.
- > 120° viewing angle.
- > Compact package outline (LxWxH) of 6.0 x 6.0 x 1.5mm.
- > Ultra low height profile - 1.5 mm.
- > Designed for high current drive; typically 350 mA.
- > Low thermal resistance;  $R_{th(jc)} = 20 \text{ K/W}$ .
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to both IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > SP NovaLED are Class 1M LED products. Do not view directly with optical instrument.



### **Applications:**

- > Automotive: exterior applications, eg: Center High Mounted Stop Light (CHMSL), Rear Combination Lights (RCLs), Signal lighting, Fog-lamp, etc.
- > Communication: indicator and backlight in mobilephone.
- > Industry: white goods (eg: Oven, microwave, etc.).
- > Lighting: garden light, architecture lighting, general lighting. etc

Part Ordering Number	Chip Technology / Color	Viewing Angle°	Luminous Intensity @ IF = 350mA (mcd)
<b>NPB-USS-X2Y-1</b>	InGaN	<b>120</b>	<b>2240.0 - 4500.0</b>
• NPB-USS-X2	Blue, 470		2240.0 - 2850.0
• NPB-USS-Y1			2850.0 - 3550.0
• NPB-USS-Y2			3550.0 - 4500.0

**NOTE**

1. Luminous intensity is measured with an accuracy of ± 11%.
2. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each reel.

**Wavelength Grouping**

Color	Group	Wavelength distribution (nm)
NPB; Blue	Full	464 - 476
	A	464 - 470
	B	470 - 476

Dominant wavelength is measured with an accuracy of ± 1 nm.

**Electrical Characteristics at Ta=25°C**

Part Number	Typ. (V)	Vf @ If = 350mA	Max. (V)
NPB-USS	3.6		4.0

Forward voltages are measure using a current pulse of 1 ms and with an accuracy of ± 0.1V.

**Optical Characteristics at Ta=25°C**

Part Number	Intensity @ If=350mA (mcd)		
	Min.	Typ.	Max.
NPB-USS-X2Y	2,240	3,000	4,500

**Correlation Between Luminous Intensity And Luminous Flux**

IV Bins	Luminous Intensity (mcd)		Luminous Flux (lm)	
	Min.	Max.	Min.	Max.
X2	2,240	2,850	5.8	7.4
Y1	2,850	3,550	7.4	9.2
Y2	3,550	4,500	9.2	11.7

Note: Data provided above is based on approximation


**Material**

Material	
Lead-frame	Cu Alloy With Ag Plating
Package	High Temperature Resistant Plastic, PPA
Encapsulant	Silicone Resin
Soldering Leads	Sn-Sn Plating


**Absolute Maximum Ratings**

	Maximum Value	Unit
DC forward current	350	mA
Pulse current	1000	mA
Reverse Voltage	Not designed for reverse bias	V
ESD Threshold (HBM)	2000	V
LED junction temperature	120	°C
Operating temperature	-40 ... +100	°C
Storage temperature	-40 ... +100	°C


**Wavelength Vs Forward Current**

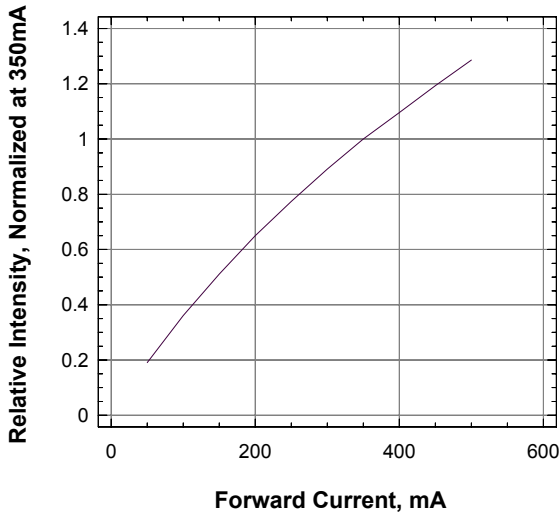


**Relative Flux Vs Forward Current**

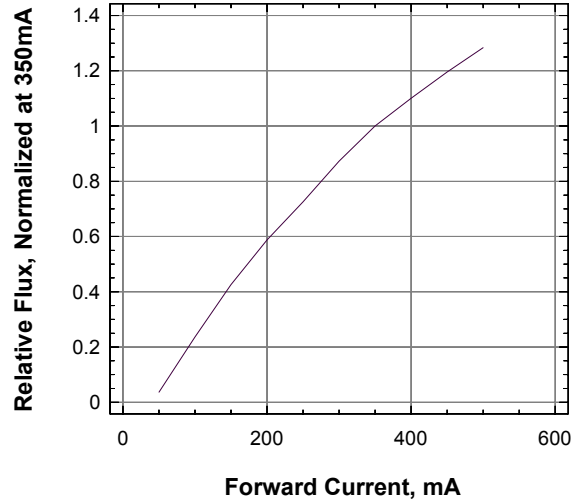


**Forward Current Vs Forward Voltage**

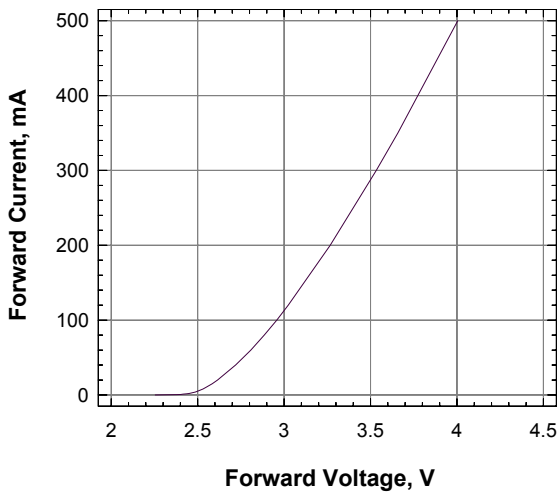


**Forward Current Vs Ambient Temperature (Rja=40KW)**

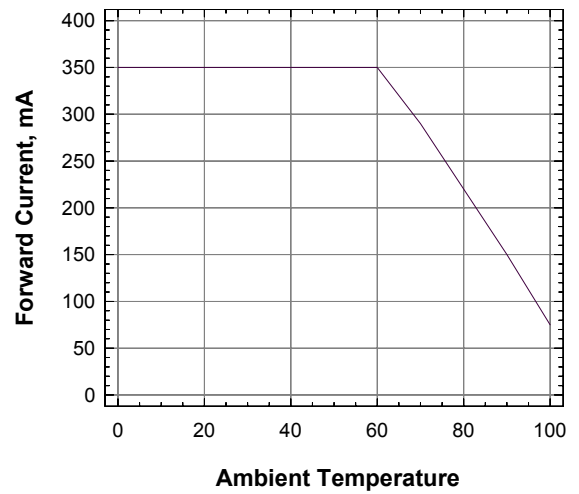


**Forward Current Vs Solder Point Temperature**

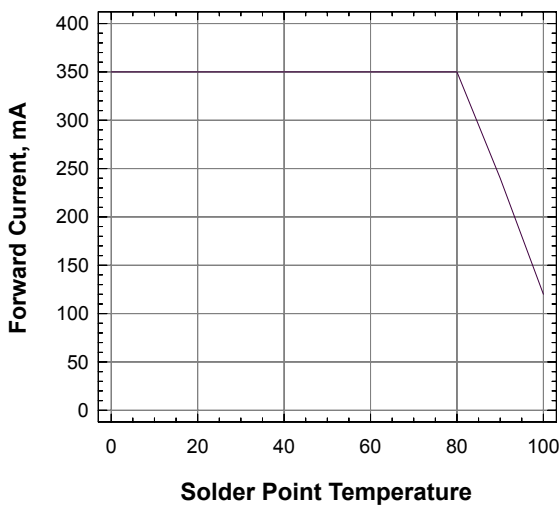


**Wavelength Vs Forward Current**

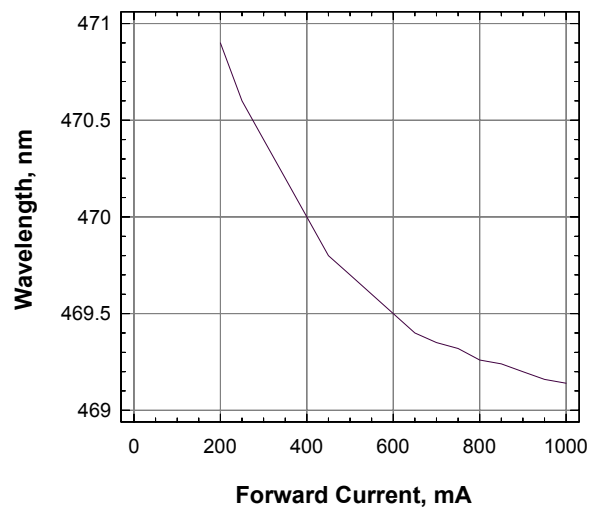

**Radiation Pattern**

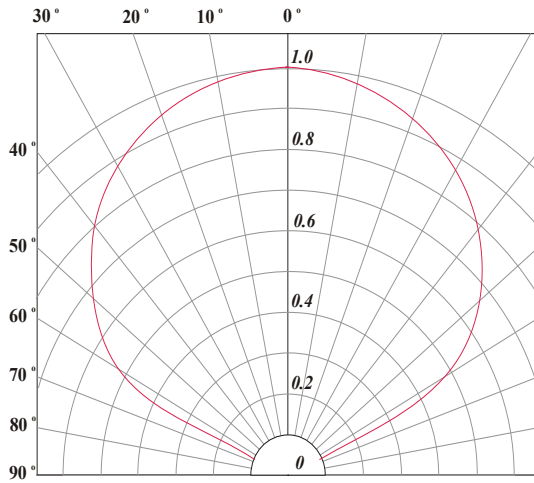


**Maximum Permissible Pulse Current**

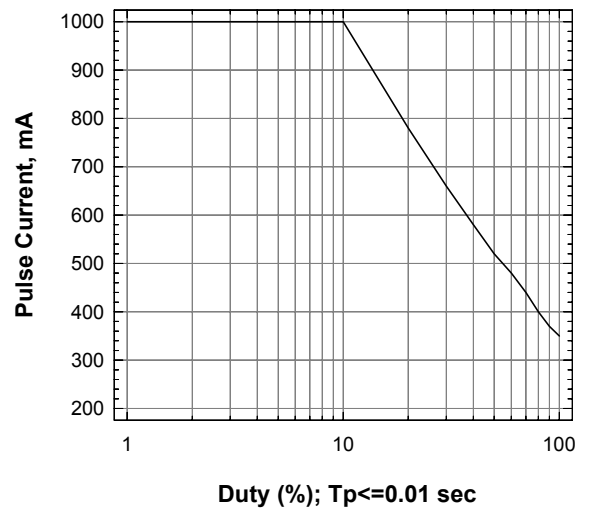




### Recommended Solder Pad

Note: Unit to unit pitching must not be less than 25 mm. Metal core circuit board (MCPCB) is highly recommended for high density applications. Please consult sales and marketing for additional information.

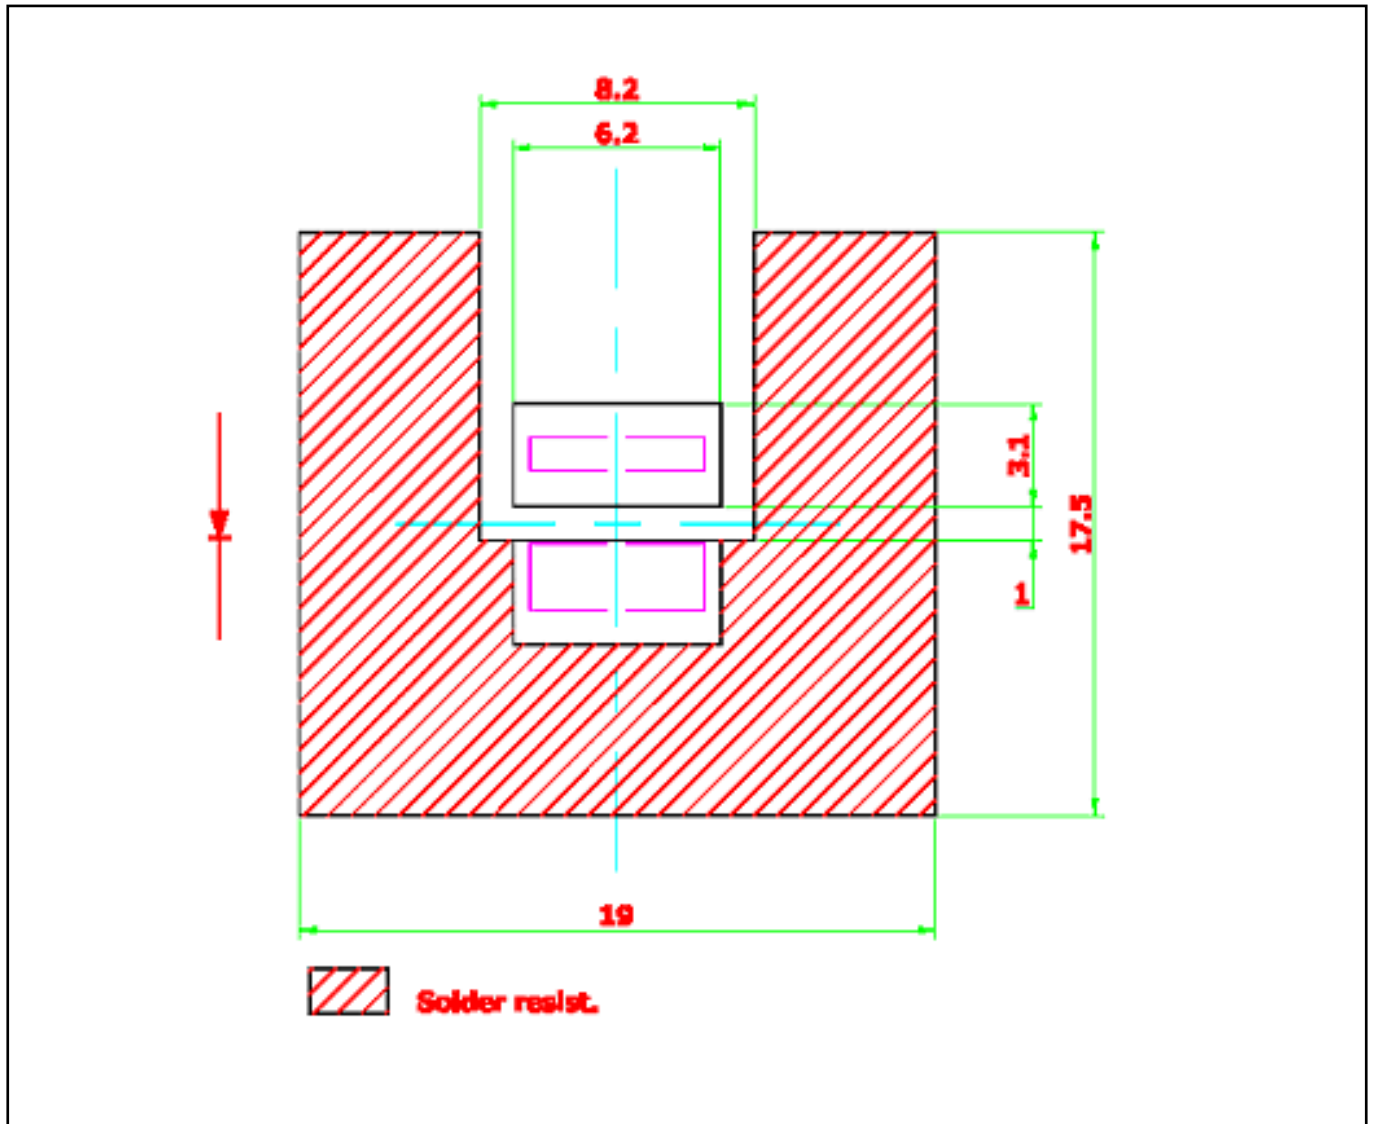


**Taping and orientation**

- Reels come in quantity of 2000 units.
- Reel diameter is 330 mm.

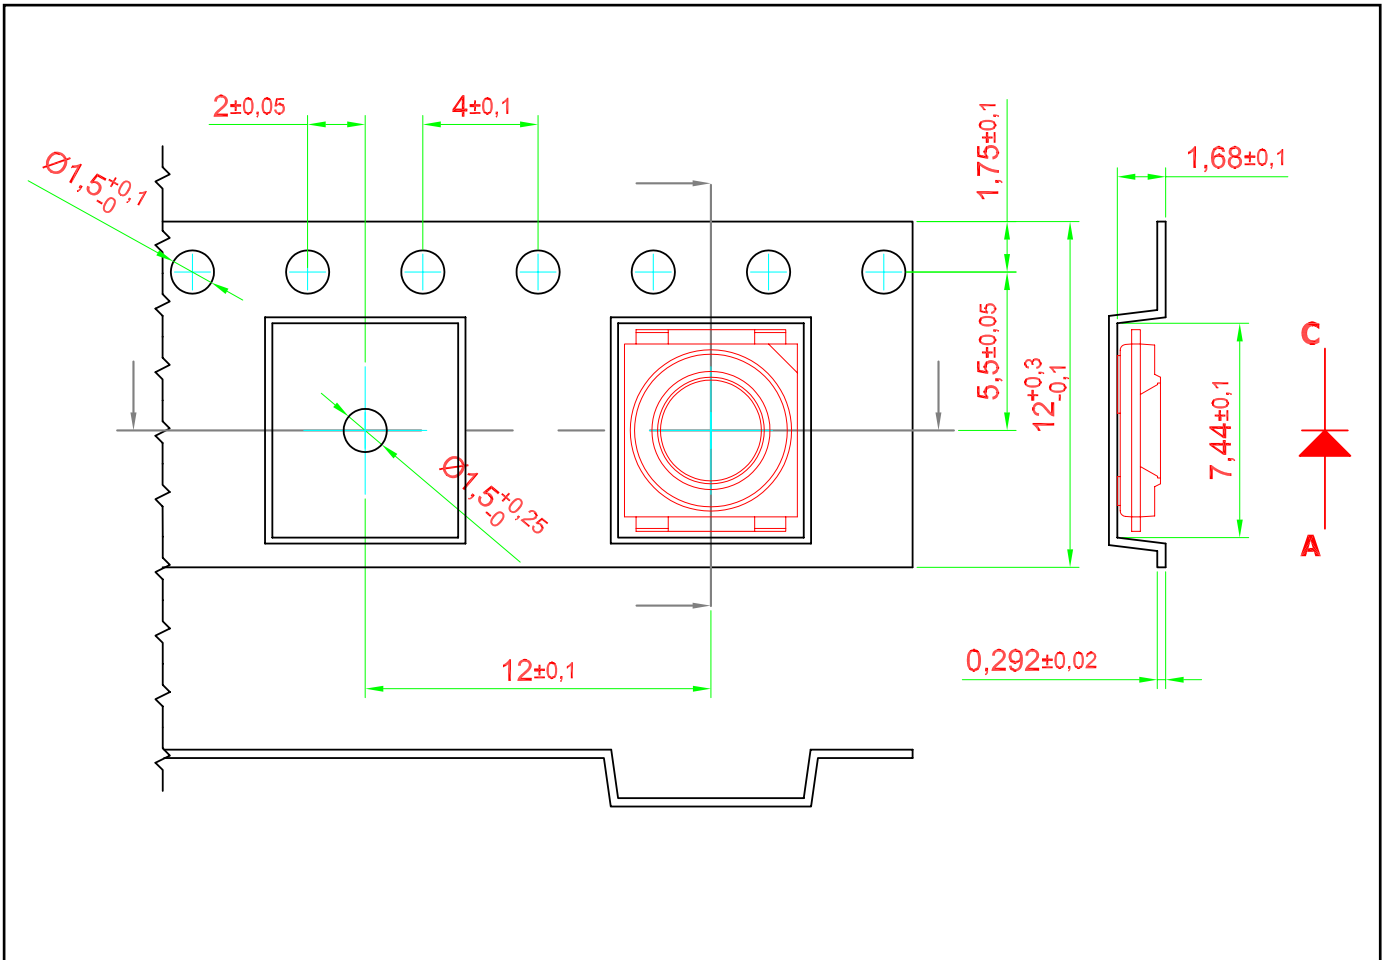





**Packaging Specification**

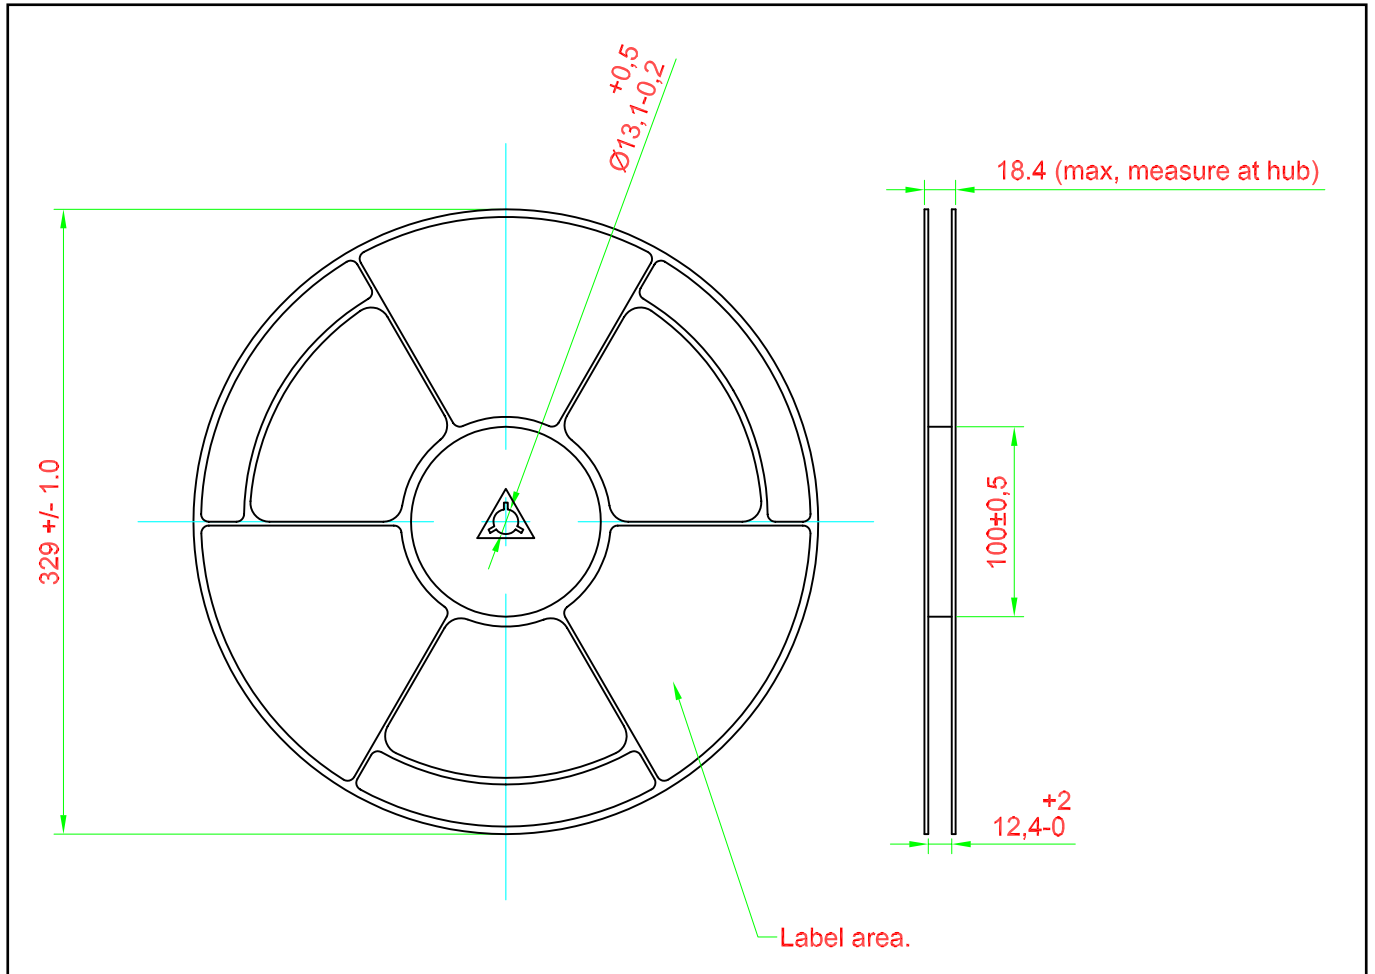

**Packaging Specification**

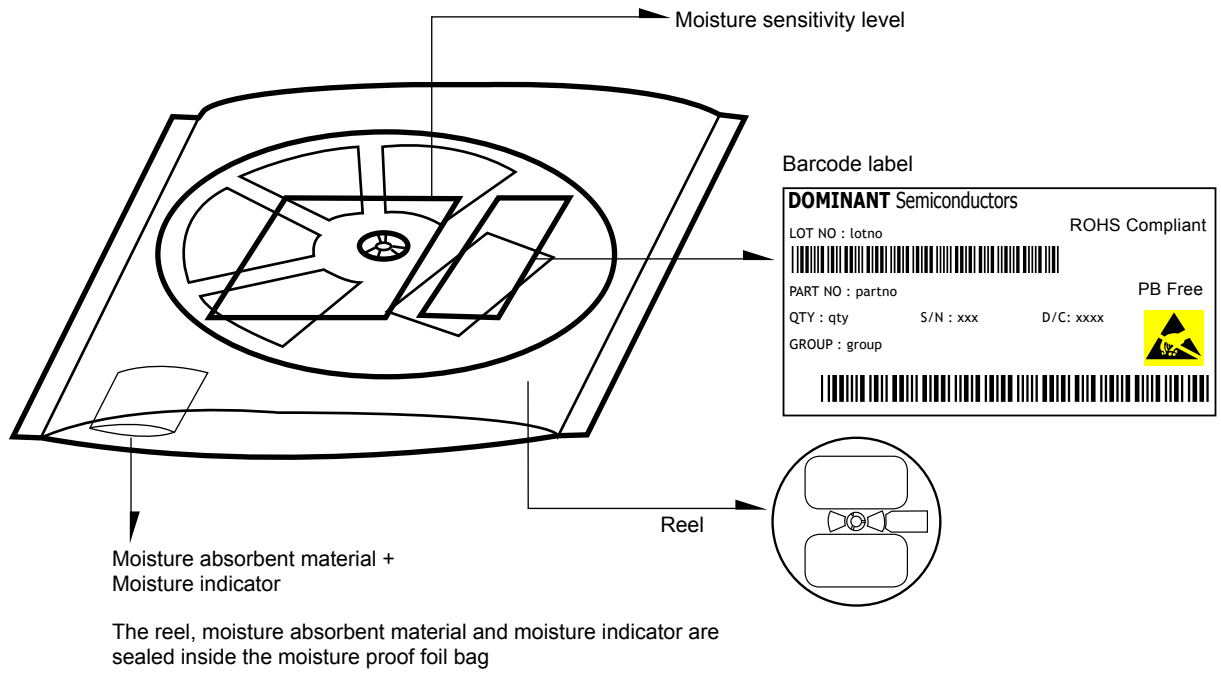


	Average 1pc SPNovaLED	1 completed bag (2000pcs)
Weight (gram)	0.188	800 ± 10

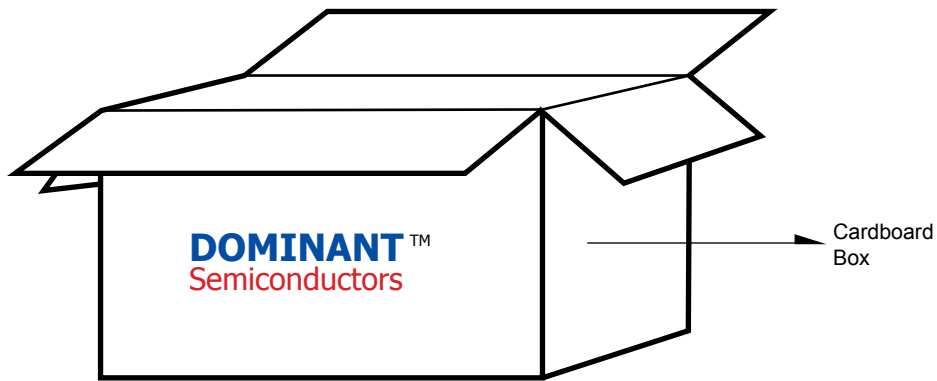


**For SPNovaLED™**

Cardboard Box Size	Dimensions (mm)	Empty Box Weight (kg)	Reel / Box	Quantity / Box (pcs)
Large	416 x 516 x 476	1.74	20 reels MAX	40,000 MAX

**Recommended Sn-Pb IR-Reflow Soldering Profile**

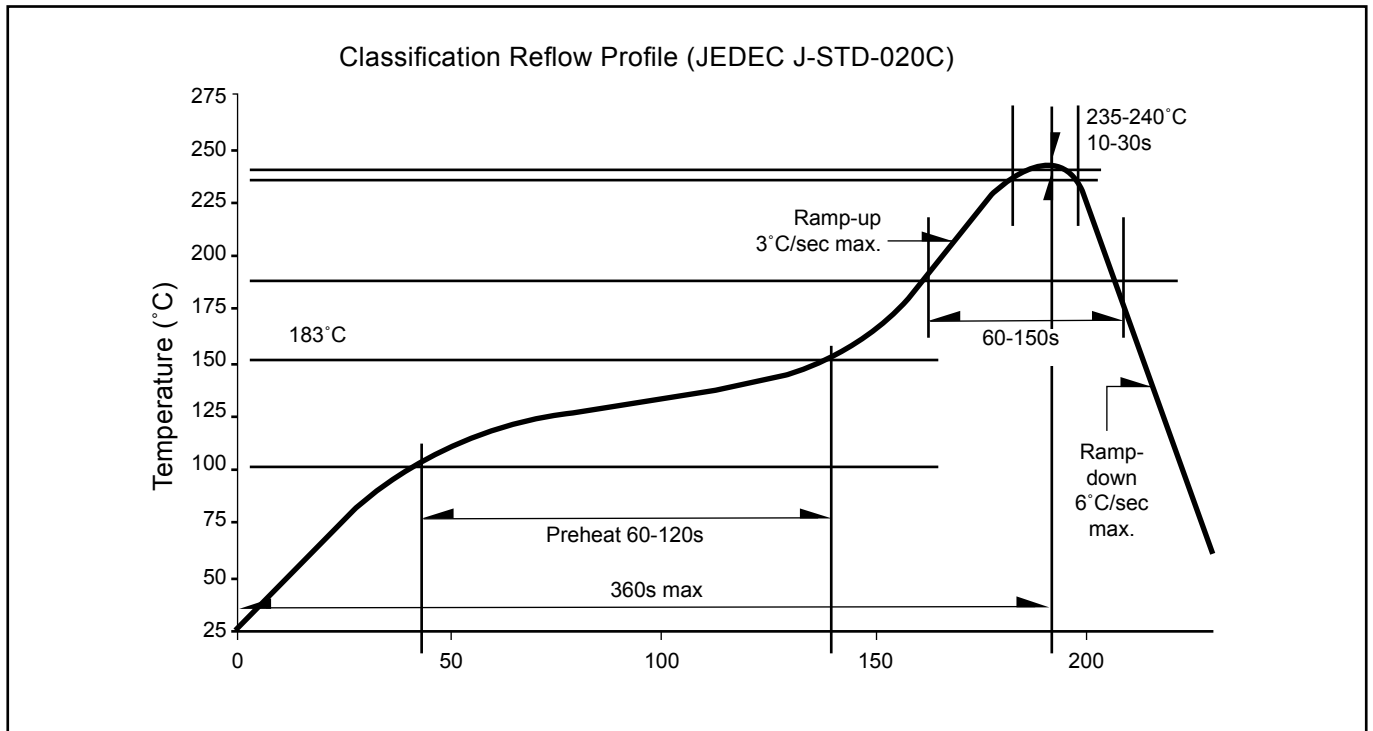

**Recommended Pb-free Soldering Profile**

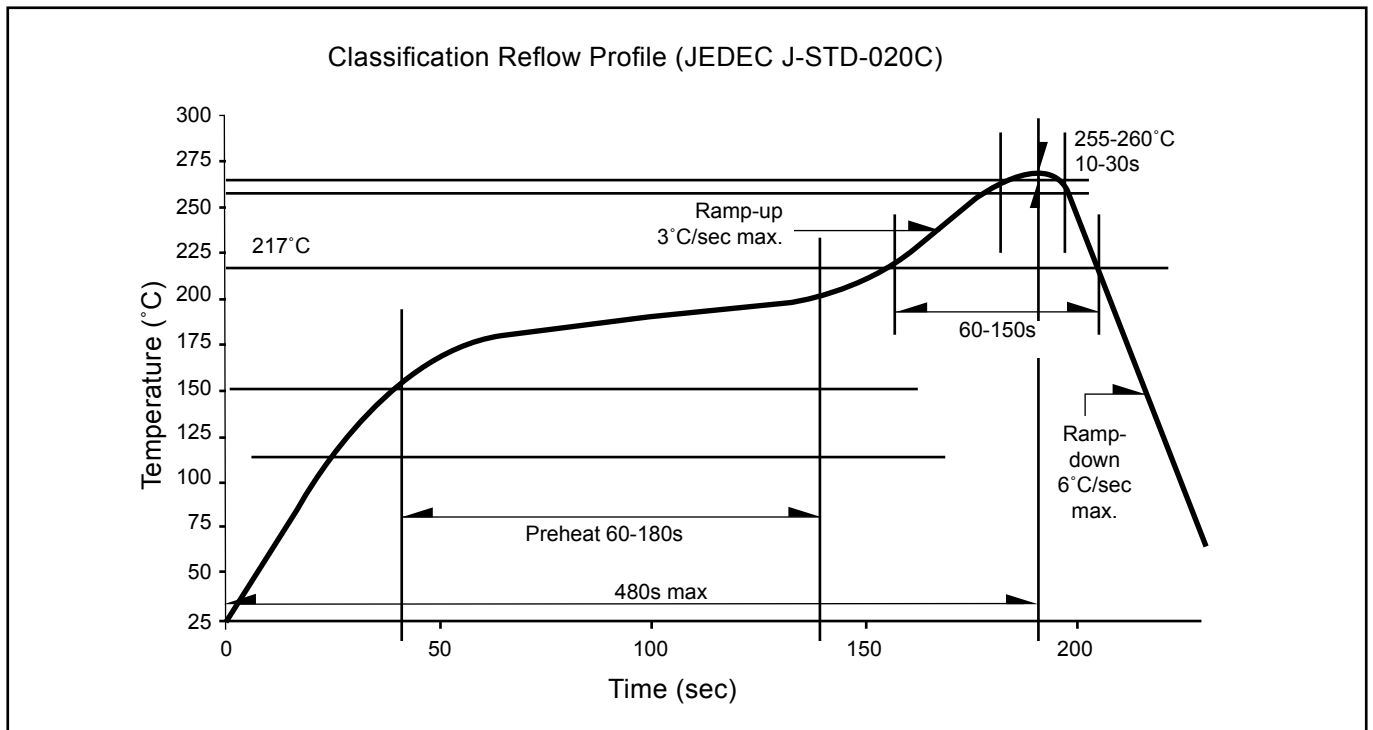



## About Us

DOMINANT Semiconductors is a dynamic Malaysian Corporation that is among the world's leading SMT LED Manufacturers. An excellence – driven organization, it offers a comprehensive product range for diverse industries and applications. Featuring an internationally certified quality assurance acclaim, DOMINANT's extra bright LEDs are perfectly suited for various lighting applications in the automotive, consumer and communications as well as industrial sectors. With extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing, research and testing capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Semiconductors can be found on the Internet at <http://www.dominant-semi.com>.

### **Please contact us for more information:**

#### Head Quarter

DOMINANT Semiconductors Sdn. Bhd.  
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia  
Tel: (606) 283 3566 Fax: (606) 283 0566  
E-mail: [sales@dominant-semi.com](mailto:sales@dominant-semi.com)

#### DOMINANT China Sales Office

DOMINANT Semiconductors (Shenzhen) Co. Ltd.  
24B.C Newbaohui Building, No. 1007 West Nanhai Blvd., Nanshan, Shenzhen, China P.C. 518054  
Tel: +86 (755) 86031785 / +86 (755) 86031786 Fax: +86 (755) 86031789  
E-mail: [sales\\_china@dominant-semi.com](mailto:sales_china@dominant-semi.com)

#### DOMINANT Korea Sales Office

DOMINANT Semiconductors Korea Inc.  
902 Sunil Technopia, 440 Sangdaewon-dong, Jungwon-gu, Sungnam-si, Kyunggi-do, Korea 462726  
Tel: 82-31-777-3978 Fax: 82-31-777-3976  
E-mail: [sales\\_korea@dominant-semi.com](mailto:sales_korea@dominant-semi.com)

