
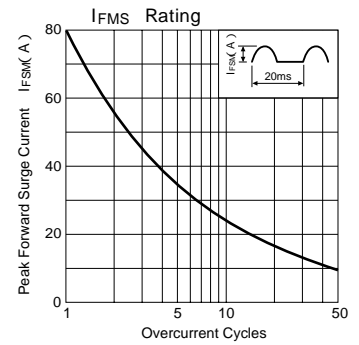






Bridge Diodes (Ultra-Fast-Recovery)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta = 25 °C)							Others	
	VRM (V)	IR(AV) (A) With Heatsink	IFSM (A) 50Hz Half-cycle Sinewave Single Shot	Tj (°C)	Tstg (°C)	VF (V)		IR (mA)	IR(H) (mA)	trr (ns)	trr (ns)	Rth(j-c) (°C/W)	Mass (g)	Fig.
						max per element IF (A)	VR = VRM max per element	VR = VRM, Ta=100 max per element	IF/IRP (mA)	IF/IRP (mA)	(/W)	(g)		
RBA-402L	200	4.0	80	- 40 to + 150		0.98	2.0	0.05	0.1	40	30	5.0	4.05	Ⓐ
RBV-602L		6.0	100			1.0	3.0	0.25	1.0	50	35	100/200	3.0	6.45

RBA-402L



RBV-602L

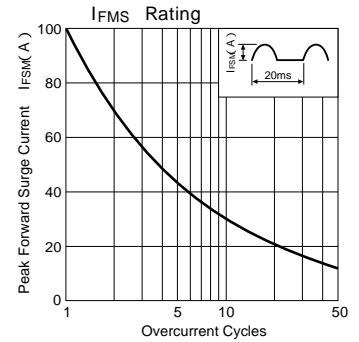

External Dimensions (Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. Ⓐ

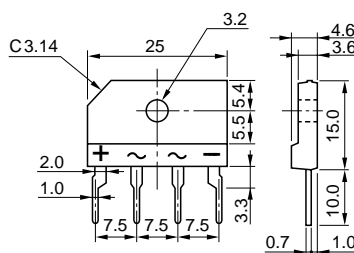


Fig. Ⓑ

