


Features

- Orange colored diffusion lens type
- $\phi 3\text{mm}$ (T-1)all plastic mold type
- Low power consumption




Outline Dimensions

unit : mm

STRAIGHT TYPE

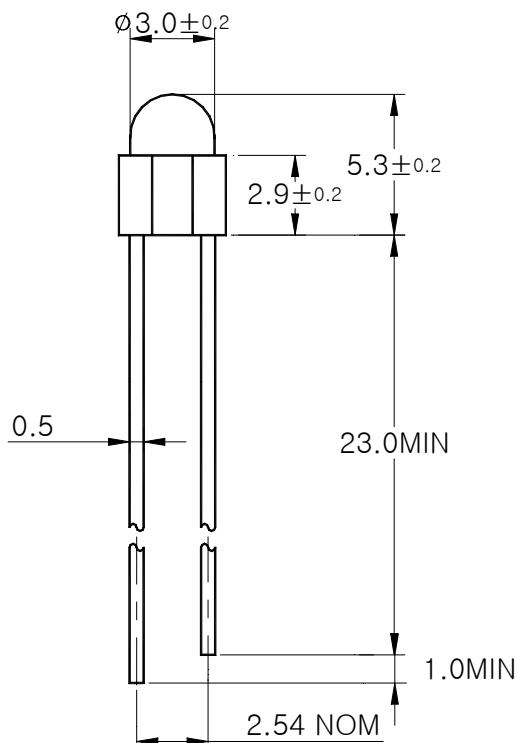

STOPPER TYPE

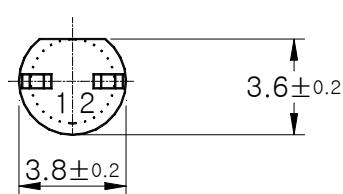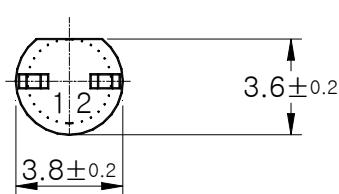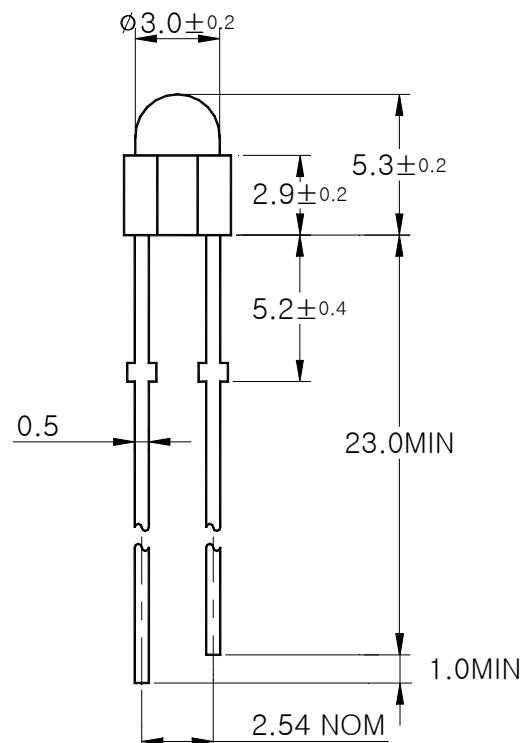

PIN Connections
1.Anode
2.Cathode

Absolute maximum ratings

| Characteristic | Symbol | Ratings | Unit |
|--------------------------------------|------------------|---------------------|------|
| Power Dissipation | P _D | 85 | mW |
| Forward Current | I _F | 30 | mA |
| * ¹ Peak Forward Current | I _{FP} | 50 | mA |
| Reverse Voltage | V _R | 4 | V |
| Operating Temperature | T _{opr} | -25~85 | °C |
| Storage Temperature | T _{stg} | -30~100 | °C |
| * ² Soldering Temperature | T _{sol} | 260°C for 5 seconds | °C |

*1.Duty ratio = 1/16, Pulse width = 0.1ms

*2. Keep the distance more than 2.0mm from PCB to the bottom of LED package

Electrical Characteristics

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|--------------------|----------------|-----------------------|------|------|------|------|
| Forward Voltage | V _F | I _F = 20mA | - | 2.0 | 2.7 | V |
| Luminous Intensity | I _V | I _F = 20mA | - | 30 | - | mcd |
| Peak Wavelength | λ _P | I _F = 20mA | - | 615 | - | nm |
| Spectrum Bandwidth | Δ λ | I _F = 20mA | - | 35 | - | nm |
| Reverse Current | I _R | V _R =4V | - | - | 10 | uA |
| Half angle | θ1/2 | I _F = 20mA | - | ±22 | - | deg |

Characteristic Diagrams

Fig. 1 $I_F - V_F$

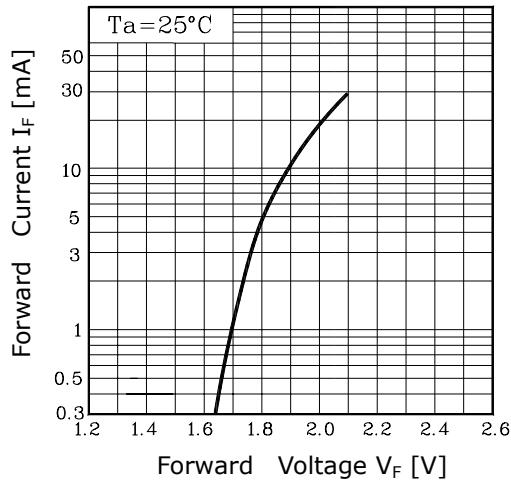


Fig. 2 $I_V - I_F$

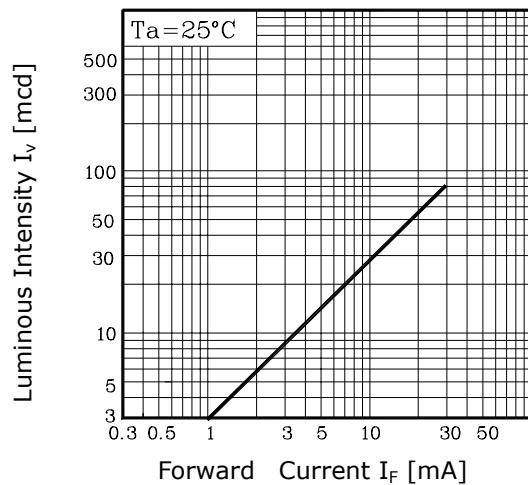


Fig. 3 $I_F - T_a$

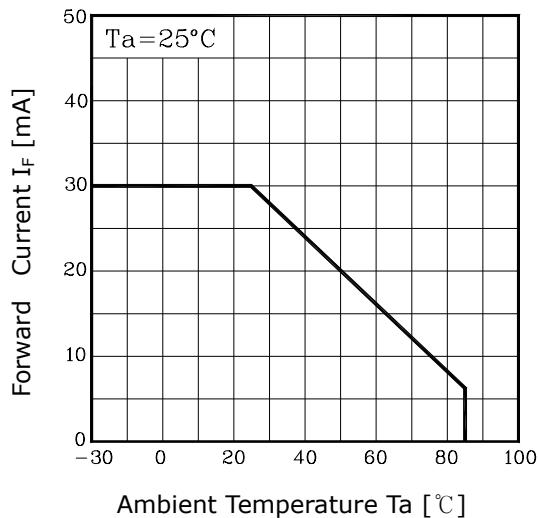


Fig. 4 Spectrum Distribution

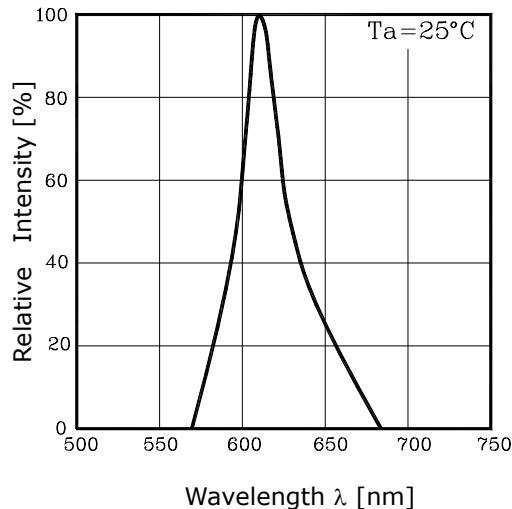


Fig. 5 Radiation Diagram

