


勝特力科技 886-3-5753170  
 勝特力電子 86-755-83289224  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive centertap
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25"(6.35mm) from case

## MECHANICAL DATA

Case : JEDEC TO-220AB molded plastic  
 Terminals : Leads solderable per MIL-STD-750  
 Method 2026  
 Polarity : As marked  
 Mounting Position : Any  
 Mounting Torque 5 In - lbs.max  
 Weight : 0.08 ounce, 2.24 grams

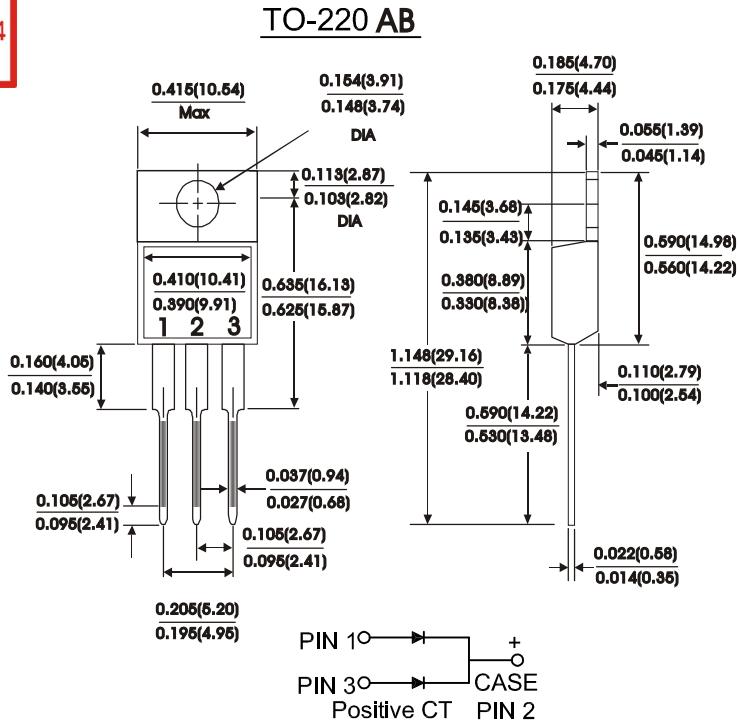

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	SR20H90CT	SR20H100CT	Units
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	90	100	Volts
Maximum RMS voltage	V <sub>RMS</sub>	63	70	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	90	100	Volts
Maximum average forward rectified current at See fig- 1	I <sub>O</sub>		20	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg)	I <sub>FSM</sub>		150	Amps
Maximum instantaneous forward voltage (Per leg)(NOTE 2)	I <sub>F</sub>		0.77	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Per leg)(NOTE 2)	I <sub>R</sub>	T <sub>c</sub> =25°C T <sub>c</sub> =125°C	100 12	uA mA
Typical thermal resistance (Per leg)(NOTE 1)	R <sub>th</sub> -JC		2.7	°C/W
Operating temperature range	T <sub>J</sub>		-65 to +175	°C
Storage temperature range	T <sub>Stg</sub>		-65 to +175	°C

## NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test: 300 us pulse width, 1% duty cycle

(3) Marking : SR20H90CT = SR20H90 (Without Marking "CT")  
 Symbol      Marking

# RATINGS AND CHARACTERISTIC CURVES SR20H90CT THRU SR20H100CT

勝特力科技 886-3-5753170  
胜特力电子 86-755-83289224  
[Http://www.100y.com.tw](http://www.100y.com.tw)

FIG.1 - TYPICAL FORWARD CORRENT DERATING CURVE

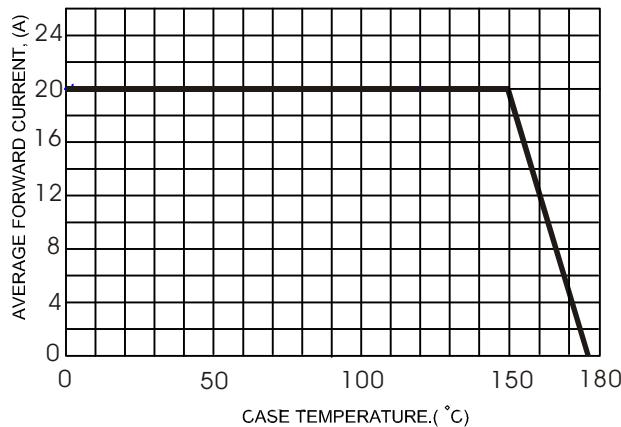


FIG.2 - TYPICAL FORWARD CHARACTERISTICS

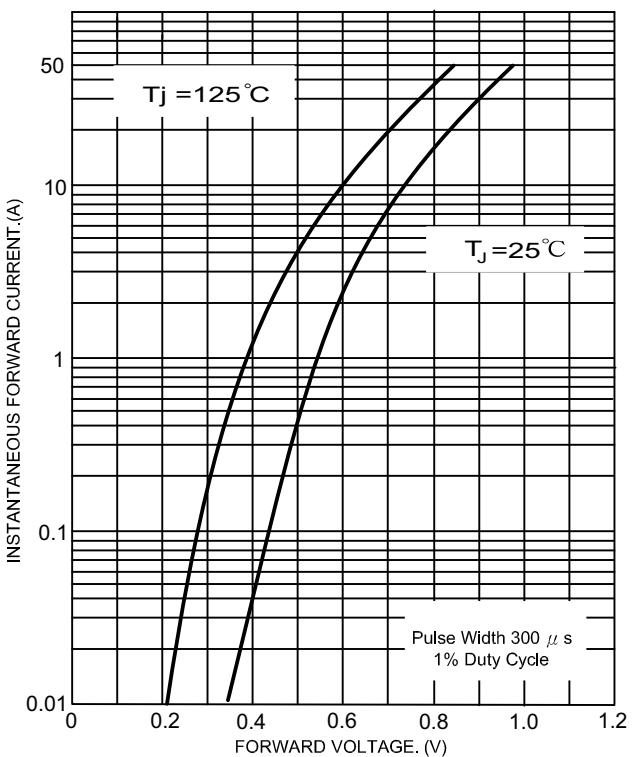


FIG.3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

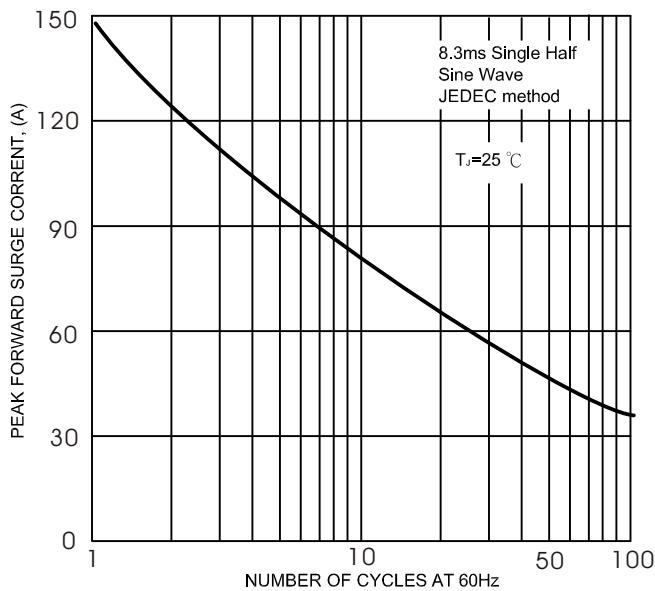


FIG.5- TYPICAL REVERSE CHARACTERISTICS

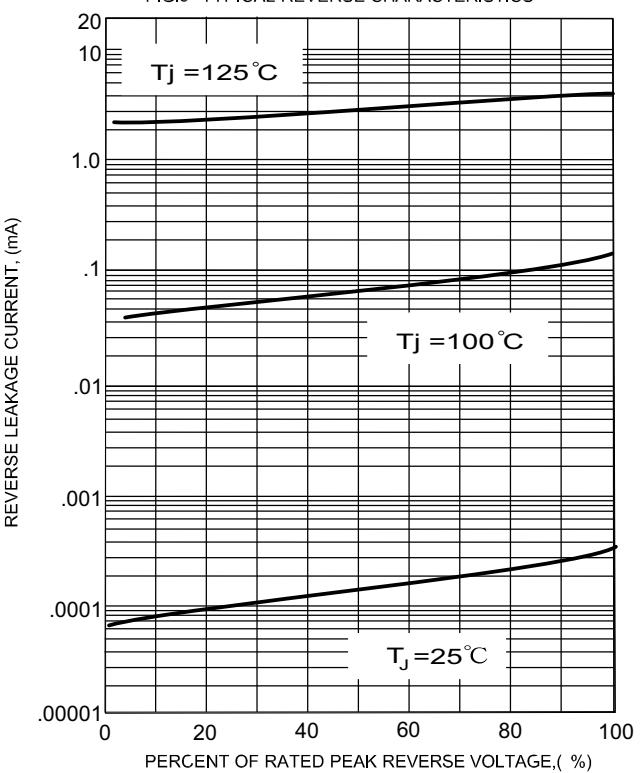


FIG.4- TYPICAL JUNCTION CAPACITANCE

