

**SUPER FAST  
GLASS PASSIVATED RECTIFIERS**

REVERSE VOLTAGE - 50 to 600 Volts  
FORWARD CURRENT - 16 Amperes


**FEATURES**

- Glass passivated chip
- Superfast switching time for high efficiency
- Low forward voltage drop and high current capability
- Low reverse leakage current
- High surge capacity
- Plastic package has UL flammability classification 94V-0

**MECHANICAL DATA**

- Case : TO-220AB molded plastic
- Polarity : As marked on the body
- Weight : 0.08 ounces, 2.24 grams
- Mounting position : Any

**TO-220AB**

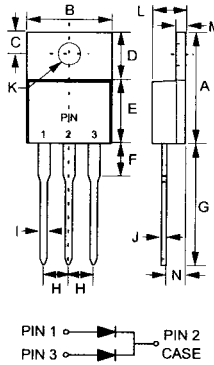

TO-220AB		
DIM.	MIN.	MAX.
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	9.65	10.67
F	-	6.35
G	12.70	14.73
H	2.29	2.79
I	0.51	1.14
J	0.30	0.64
K	3.53	4.09
L	3.56	4.83
M	1.14	1.40
N	2.03	2.92

All Dimensions in millimeter

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%


CHARACTERISTICS	SYMBOL	STPRF	STPRF	STPRF	STPRF	STPRF	STPRF	STPRF	STPRF	UNIT		
		1605CT	1610CT	1615CT	1620CT	1630CT	1640CT	1650CT	1660CT			
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	150	200	300	400	500	600	V		
Maximum RMS Voltage	VRMS	35	70	105	140	210	280	350	420	V		
Maximum DC Blocking Voltage	VDC	50	100	150	200	300	400	500	600	V		
Maximum Average Forward Rectified Current @Tc=100°C	I(AV)	16									A	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC METHOD)	IFSM	125									A	
Maximum Forward Voltage at 8.0A DC	VF	0.95		1.3		1.5					V	
Maximum DC Reverse Current at Rated DC Blocking Voltage @Tj=25°C @Tj=100°C	IR	5 500									uA	
Typical Junction Capacitance per element (Note 1)	CJ	110					80					pF
Maximum Reverse Recovery Time (Note 2)	TRR	35			50							ns
Typical Thermal Resistance (Note 3)	RθJC	1.5										°C/W
Operating and Storage Temperature Range	Tj, Tstg	-55 to +150										°C

NOTES : 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


2. Reverse Recovery Test Conditions: If=0.5A, IR=1.0A, IRR 0.25A.

3. Thermal Resistance Junction to Case.


**FIG. 1 - FORWARD CURRENT DERATING CURVE**

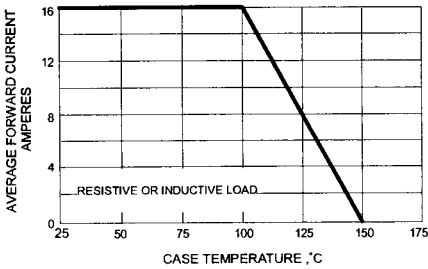


**FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT**

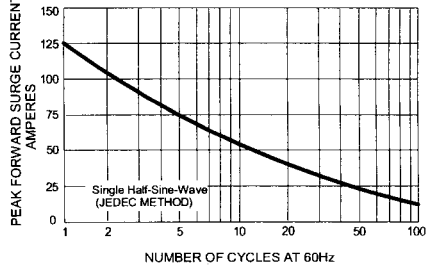

**FIG. 3 - TYPICAL REVERSE CHARACTERISTICS**

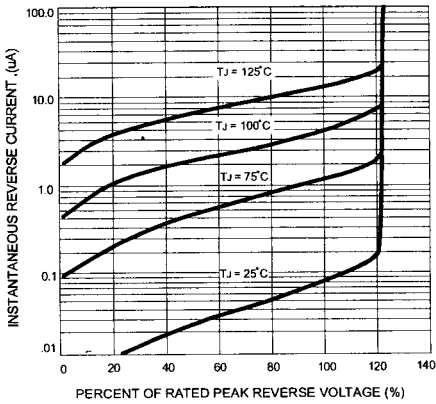

**FIG. 4 - TYPICAL FORWARD CHARACTERISTICS**

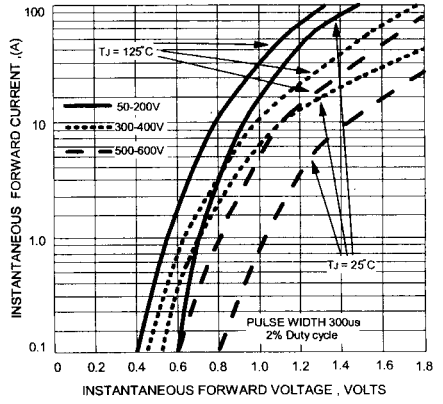

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE**

