

2.0 inch (50.80mm) 4X4 DOT MATRIX LED DISPLAY

UVP-2X44 SERIES

DESCRIPTION

The UVP-2X44 is 2.0 inch (50.80mm) height 4X4 dot matrix display.

Single color display have the choices of three bright colors-AlGaAs red/green/yellow.

Multicolor display are applicable to two colors -green/red/orange.

All device have black face and white dot.

The AlGaAs red LED chip are made from AlGaAs on a non-transparent GaAs substrate.

The green LED chip are made from GaP on a transparent GaP substrate.

The yellow and Red Orange LED chip are made from GaAsP on a transparent GaP substrate.

FEATURES

- Industuy standard size
- Wide viewing angle
- Continuous uniform dot matrix.
- Excellent characters appearance
- Low power requirement

DEVICES

PART NO.	DESCRIPTION	PACKAGE DIMENSION	INTERNAL CIRCUIT DIAGRAM
UVP-2344	Column Cathode	Fig. 1	Fig. 2

ABSOLUTE MAXIMUM RATINGS

@ T_A=25 °C

PARAMETER	AlGaAs RED	GREEN	YELLOW	RED ORANGE	UNIT
Power Dissipation Per Dot	96	96	96	96	mW
Peak Forward Current Per Dot	110	90	80	80	mA
Continuous Forward Current Per Dot	14	11	8	8	mA
Derating Linear From 25°C Per Dot	0.19	0.15	0.08	0.08	mA/°C
Reverse Voltage Per Dot	15	15	15	15	V
Operating Temperature Range	-35°Cto+85°C				
Storage Temperature Range	-35°Cto+85°C				
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260°C					

UNi

Unity Opto Technology Co., Ltd.

11/14/2000

2.0 inch (50.80mm) 4X4 DOT MATRIX LED DISPLAY

UVP-2X44 SERIES

PACKAGE DIMENSIONS


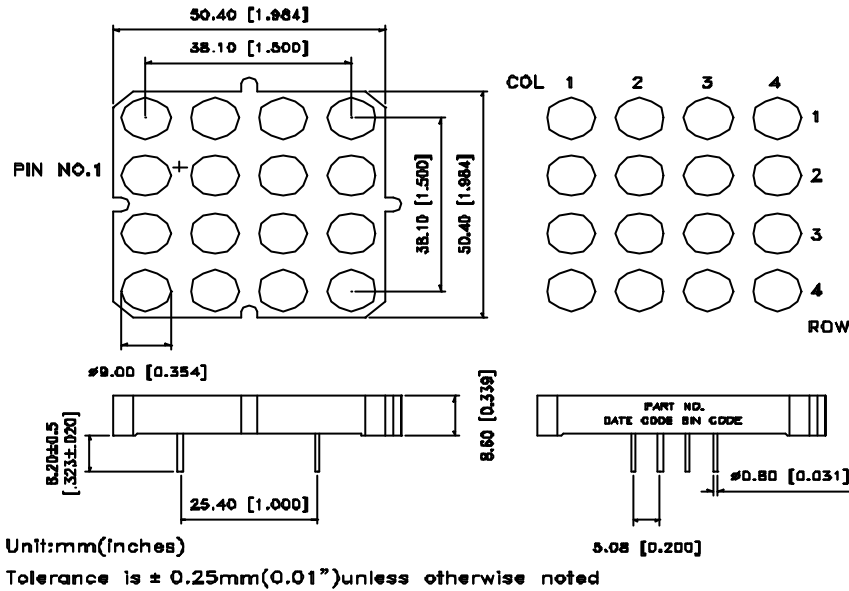


Fig. 1


INTERNAL CIRCUIT DIAGRAM

A. UVP-2344XX

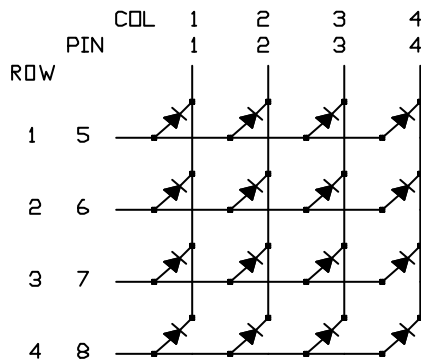

✳ 3 CHIPS IN SERIES

B. UVP-2844A3

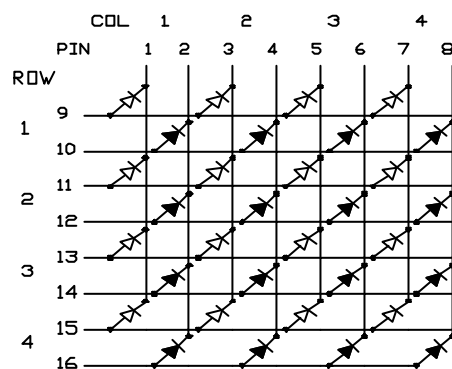

✳ STANDS FOR 3 RED ORANGE CHIPS IN SERIES.
✳ STANDS FOR 3 GREEN CHIPS IN SERIES.

Fig. 2

2.0 inch (50.80mm)

4X4 DOT MATRIX LED DISPLAY

UVP-2X44 SERIES

PIN CONNECTION

Pin No.	CONNECTION	
	UVP-2344XX	UVP-2844A ₃
1	CATHODE COLUMN 1	CATHODE COLUMN 1 RED ORANGE
2	CATHODE COLUMN 2	CATHODE COLUMN 1 GREEN
3	CATHODE COLUMN 3	CATHODE COLUMN 2 RED ORANGE
4	CATHODE COLUMN 4	CATHODE COLUMN 2 GREEN
5	ANODE ROW 1	CATHODE COLUMN 3 RED ORANGE
6	ANODE ROW 2	CATHODE COLUMN 3 GREEN
7	ANODE ROW 3	CATHODE COLUMN 4 ORANGE
8	ANODE ROW 4	CATHODE COLUMN 4 GREEN
9		ANODE ROW 1 RED ORANGE
10		ANODE ROW 1 GREEN
11		ANODE ROW 2 RED ORANGE
12		ANODE ROW 2 GREEN
13		ANODE ROW 3 RED ORANGE
14		ANODE ROW 3 GREEN
15		ANODE ROW 4 RED ORANGE
16		ANODE ROW 4 GREEN

**2.0 inch (50.80mm)
4X4 DOT MATRIX LED DISPLAY**

UVP-2X44 SERIES

ELECTRICAL/OPTICAL CHARACTERISTICS

AlGaAs RED (UVP-2344C)

@ T_A=25 °C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _V	15100	28000		μcd	I _p = 80 mA 1/16 Duty
Peak Emission Wavelength	λ _p /Hue		660/638		nm	I _F = 20 mA
Spectral Line Half-Width	Δλ		35		nm	I _F = 20 mA
Forward Voltage, any Dot	V _F		5.4	7.2	V	I _F = 20 mA
Reverse Current, any Dot	I _R			100	μA	V _R = 15 V
Luminous Intensity Matching Ratio	I _V -m			2:1		I _F = 10 mA

GREEN (UVP-2344G) & (UVP-2844A₃ GREEN)

@ T_A=25 °C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _V	5000	11000		μcd	I _p = 80 mA 1/16 Duty
Peak Emission Wavelength	λ _p /Hue		565/569		nm	I _F = 20 mA
Spectral Line Half-Width	Δλ		30		nm	I _F = 20 mA
Forward Voltage, any Dot	V _F		6.3	7.8	V	I _F = 20 mA
Reverse Current, any Dot	I _R			100	μA	V _R = 15 V
Luminous Intensity Matching Ratio	I _V -m			2:1		I _F = 10 mA

YELLOW (UVP-2344Y)

@ T_A=25 °C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _V	5000	11000		μcd	I _p = 80 mA 1/16 Duty
Peak Emission Wavelength	λ _p /Hue		585/588		nm	I _F = 20 mA
Spectral Line Half-Width	Δλ		35		nm	I _F = 20 mA
Forward Voltage, any Dot	V _F		6.0	7.8	V	I _F = 20 mA
Reverse Current, any Dot	I _R			100	μA	V _R = 15 V
Luminous Intensity Matching Ratio	I _V -m			2:1		I _F = 10 mA

RED ORANGE (UVP-2844A₃ RED ORANGE)

@ T_A=25 °C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _V	5000	11000		μcd	I _p = 80 mA 1/16 Duty
Peak Emission Wavelength	λ _p /Hue		630/621		nm	I _F = 20 mA
Spectral Line Half-Width	Δλ		40		nm	I _F = 20 mA
Forward Voltage, any Dot	V _F		6.0	7.8	V	I _F = 20 mA
Reverse Current, any Dot	I _R			100	μA	V _R = 5 V
Luminous Intensity Matching Ratio	I _V -m			2:1		I _F = 10 mA



2.0 inch (50.80mm)

4X4 DOT MATRIX LED DISPLAY

UVP-2X44 SERIES

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

(Ambient Temperature =25°C Unless Otherwise Noted)

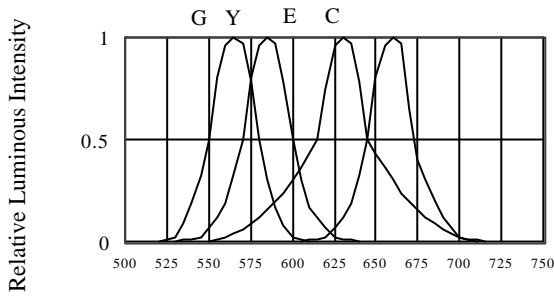


FIG.1 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

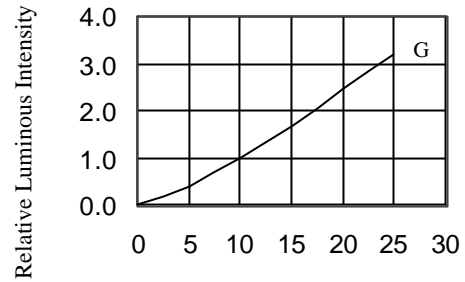


FIG.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

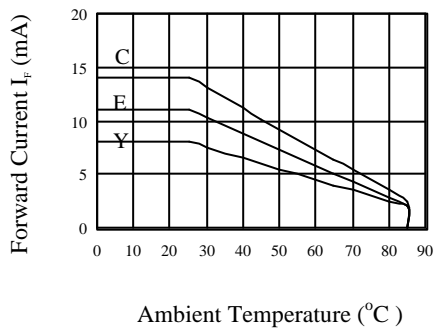


FIG.3 FORWARD CURRENT DERATING CURVE

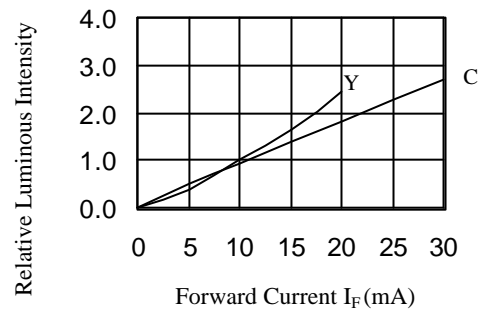


FIG.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

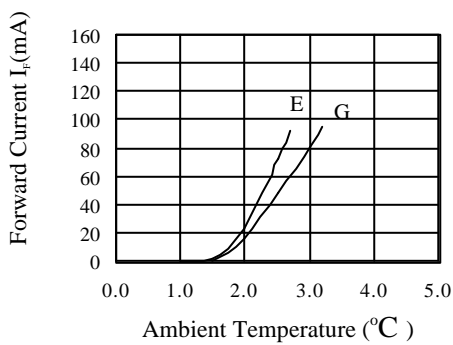


FIG.3 ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

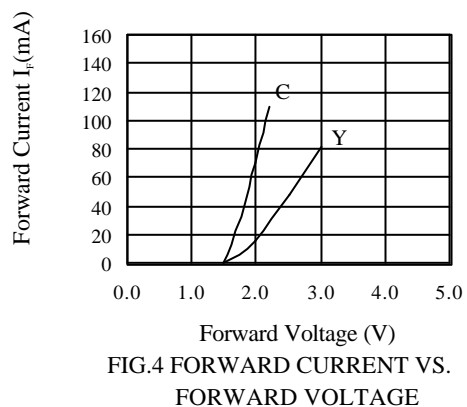


FIG.4 FORWARD CURRENT VS. FORWARD VOLTAGE