

UMTS PICOCELL FRONT END MODULE



DESCRIPTION

The MODEL VFM1004A is a UMTS Node B Local Area front end module (FEM). It is designed to replace all of the RF components that would be typically used in a Node B local area front end. It is RoHS compliant and lead-free. It has a patent pending design.


FEATURES

- Scalable PA capable of delivering 24 dBm at the antenna port while meeting TS25.104 R6.
- Distributed filters offering excellent isolation and harmonic suppression.
- LNA with Bypass mode to increase receiver linearity

FEM Simplified Block Diagram

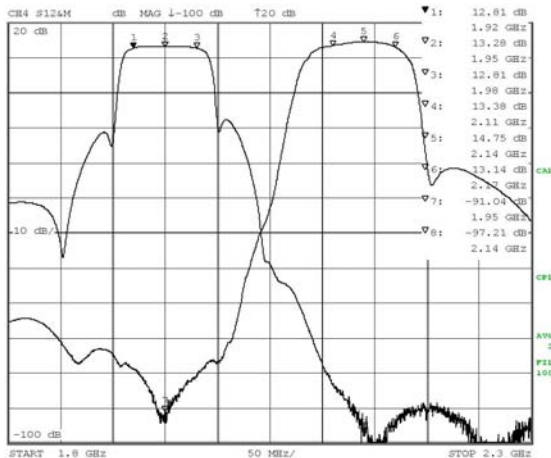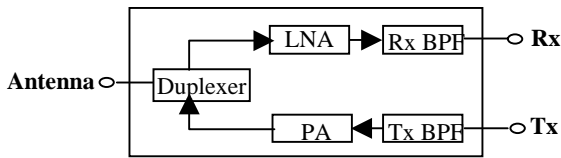

Tx, Rx Gain

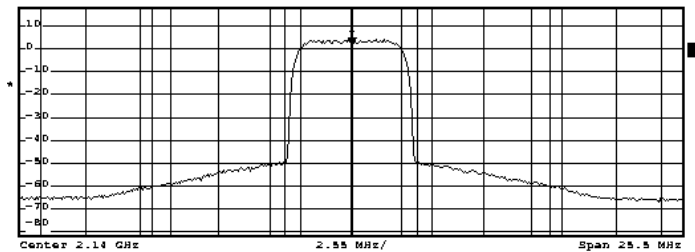

Tx Channel		W-CDMA 3GPP FDD	
Bandwidth	3.84 MHz	Power	23.88 dBm
Adjacent Channel Bandwidth	3.84 MHz	Lower	-56.94 dB
Spacing	5 MHz	Upper	-57.01 dB
Alternate Channel Bandwidth	3.84 MHz	Lower	-67.16 dB
Spacing	10 MHz	Upper	-67.51 dB

ACLR @ 2140 MHz

Specifications:

TRANSMIT

Frequency range 2110 – 2170 MHz
 PA supply voltage 8V
 Attenuation (2.25–12.75 GHz) > 30 dB

RECEIVE

Frequency range 1920 – 1980 MHz
 LNA supply voltage 5V
 Attenuation (2.17–12.75 GHz) > 30 dB

Tx to Rx isolation @ antenna port 90 dB typical
 Tx input to Rx output isolation 65 dB typical

Size: 30.5 mm x 25 mm x 6.75 mm

Temp. range: - 40°C to 85° C