4.8mm BI-LEVEL LED INDICATOR


Part Number: WP73EB/2YDA YELLOW

Features

- PRE-TRIMMED LEADS FOR PC BOARD MOUNTING.
- COLORS CAN BE MIXED IN A SINGLE HOUSING.
- I.C. COMPATIBLE.
- BLACK CASE ENHANCES CONTRAST RATIO.
- WIDE VIEWING ANGLE.
- HIGH RELIABILITY LIFE MEASURED IN YEARS.
- UL RATING : 94V-0.
- HOUSING MATERIAL: TYPE 66 NYLON.
- RoHS COMPLIANT.

Description

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

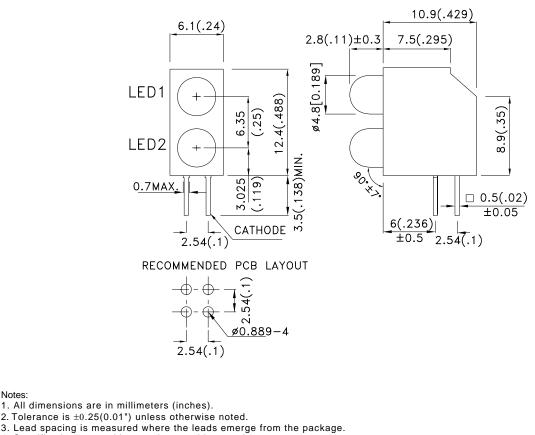

4. Specifications are subject to change without notice.

SPEC NO: DSAF2087 **APPROVED: WYNEC**

Notes:

REV NO: V.2 CHECKED: Allen Liu DATE: MAY/03/2007 **DRAWN: W.J.HUA**

PAGE: 1 OF 4 ERP:1102002000

Package Dimensions

Selection Guide lv (mcd) Viewing @ 10 mA [2] Angle [1] Part No. Dice Lens Type Min. 201/2 Тур. WP73EB/2YDA YELLOW (GaAsP/GaP) YELLOW DIFFUSED 5 20 60°

Notes:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

2. Luminous Intensity / Luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Yellow	590		nm	IF=20mA
λD [1]	Dominant Wavelength	Yellow	588		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Yellow	35		nm	IF=20mA
С	Capacitance	Yellow	20		pF	VF=0V;f=1MHz
VF[2]	Forward Voltage	Yellow	2.1	2.5	V	IF=20mA
IR	Reverse Current	Yellow		10	uA	VR = 5V

Notes:

1.Wavelength: +/-1nm.

2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at TA=25°C


Parameter	Yellow	Units	
Power dissipation	75	mW	
DC Forward Current	30	mA	
Peak Forward Current [1]	140	mA	
Reverse Voltage	5	V	
Operating/Storage Temperature	-40°C To +85°C		
Lead Solder Temperature [2]	260°C For 3 Seconds		
Lead Solder Temperature [3]	260°C For 5 Seconds		

Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.

3. 5mm below package base.

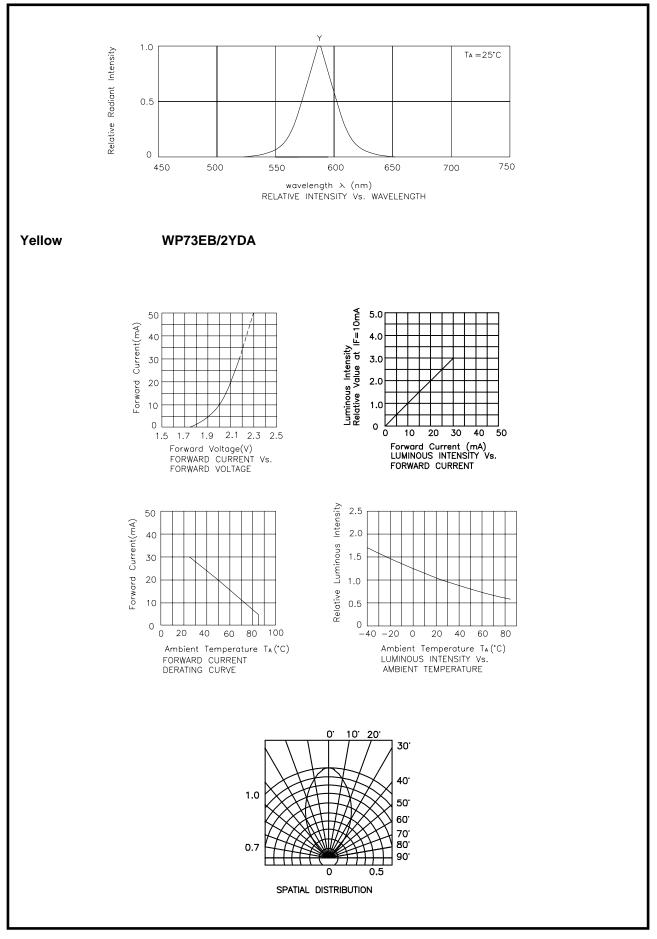

SPEC NO: DSAF2087 APPROVED: WYNEC REV NO: V.2 CHECKED: Allen Liu DATE: MAY/03/2007 DRAWN: W.J.HUA PAGE: 3 OF 4 ERP:1102002000

