



# DATA SHEET

## MMBT3904

### NPN GENERAL PURPOSE SWITCHING TRANSISTOR

<b>VOLTAGE</b>	<b>40 Volts</b>	<b>POWER</b>	<b>225 mWatts</b>	<b>SOT-23</b>	Unit: inch (mm)
----------------	-----------------	--------------	-------------------	---------------	-----------------

#### FEATURES

- NPN epitaxial silicon, planar design
- Collector-emitter voltage  $V_{CE} = 40V$
- Collector current  $I_C = 200mA$
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request



#### MECHANICAL DATA

Case: SOT-23, Plastic

Terminals: Solderable per MIL-STD-202G, Method 208

Approx. Weight: 0.008 gram

Marking: S1A

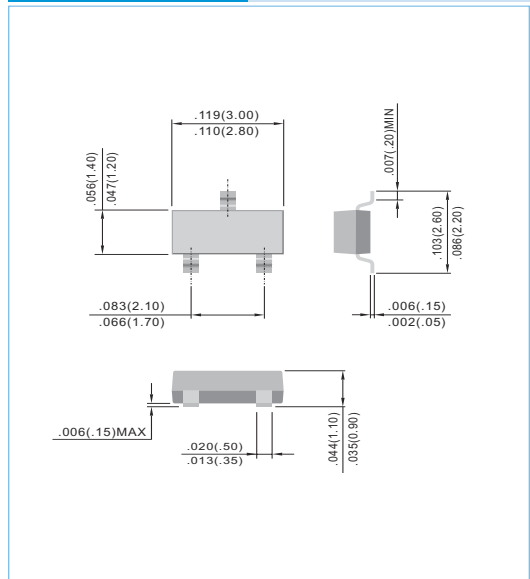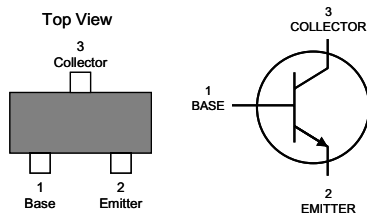

#### ABSOLUTE RATINGS

PARAMETER	Symbol	Value	Units
Collector-Emitter Voltage	$V_{CE0}$	40	V
Collector-Base Voltage	$V_{CB0}$	60	V
Emitter-Base Voltage	$V_{EB0}$	6.0	V
Collector Current - Continuous	$I_C$	200	mA

#### THERMAL CHARACTERISTICS

PARAMETER	Symbol	Value	Units
Max Power Dissipation (Note 1)	$P_{TOT}$	225	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^{\circ}C/W$
Junction Temperature	$T_J$	-55 to 150	$^{\circ}C$
Storage Temperature	$T_{STG}$	-55 to 150	$^{\circ}C$

Note 1: Transistor mounted on FR-5 board 1.0 x 0.75 x 0.062 in.




**ELECTRICAL CHARACTERISTICS**  $T_A=25^{\circ}\text{C}$


PARAMETER	Symbol	Test Condition	MIN.	TYP.	MAX.	Units
Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1.0\text{mA}, I_B=0$	40	-	-	V
Collector - Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=10\mu\text{A}, I_E=0$	60	-	-	V
Emitter - Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu\text{A}, I_C=0$	6.0	-	-	V
Base Cutoff Current	$I_{BL}$	$V_{CE}=30\text{V}, V_{EB}=3.0\text{V}$	-	-	50	nA
Collector Cutoff Current	$I_{cEX}$	$V_{CE}=30\text{V}, V_{EB}=3.0\text{V}$	-	-	50	nA
DC Current Gain (Note 2)	$h_{FE}$	$I_C=0.1\text{mA}, V_{CE}=1.0\text{V}$ $I_C=1.0\text{mA}, V_{CE}=1.0\text{V}$ $I_C=10\text{mA}, V_{CE}=1.0\text{V}$ $I_C=50\text{mA}, V_{CE}=1.0\text{V}$ $I_C=100\text{mA}, V_{CE}=1.0\text{V}$	40 70 100 60 30	- - - - -	- - 300 - -	-
Collector - Emitter Saturation Voltage (Note 2)	$V_{CE(SAT)}$	$I_C=10\text{mA}, I_B=1.0\text{mA}$ $I_C=50\text{mA}, I_B=5.0\text{mA}$	-	-	0.2 0.3	V
Base - Emitter Saturation Voltage (Note 2)	$V_{BE(SAT)}$	$I_C=10\text{mA}, I_B=1.0\text{mA}$ $I_C=50\text{mA}, I_B=5.0\text{mA}$	0.65 -	- -	0.85 0.95	V
Collector - Base Capacitance	$C_{CBO}$	$V_{CB}=5\text{V}, I_E=0, f=1\text{MHz}$	-	-	4.0	pF
Emitter - Base Capacitance	$C_{EBO}$	$V_{CB}=0.5\text{V}, I_C=0, f=1\text{MHz}$	-	-	8.0	pF
Delay Time	$t_d$	$V_{CC}=3\text{V}, V_{BE}=-0.5\text{V}, I_C=10\text{mA}, I_B=1.0\text{mA}$	-	-	35	ns
Rise Time	$t_r$	$V_{CC}=3\text{V}, V_{BE}=-0.5\text{V}, I_C=10\text{mA}, I_B=1.0\text{mA}$	-	-	35	ns
Storage Time	$t_s$	$V_{CC}=3\text{V}, I_C=10\text{mA}, I_{B1}=I_{B2}=1.0\text{mA}$	-	-	200	ns
Fall Time	$t_f$	$V_{CC}=3\text{V}, I_C=10\text{mA}, I_{B1}=I_{B2}=1.0\text{mA}$	-	-	50	ns

Note 2: Pulse Test: Pulse Width < 300 us, Duty Cycle < 2.0%.

**SWITCHING TIME EQUIVALENT TEST CIRCUITS**

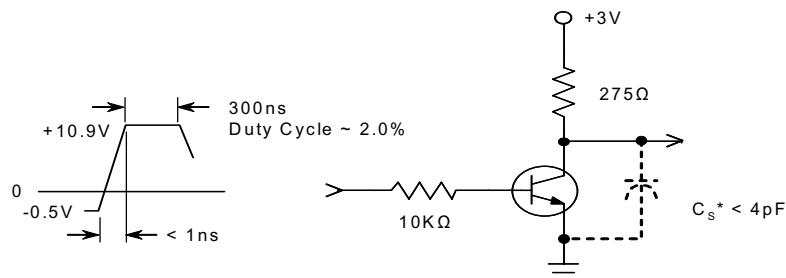


**Delay and Rise Time Equivalent Test Circuit**

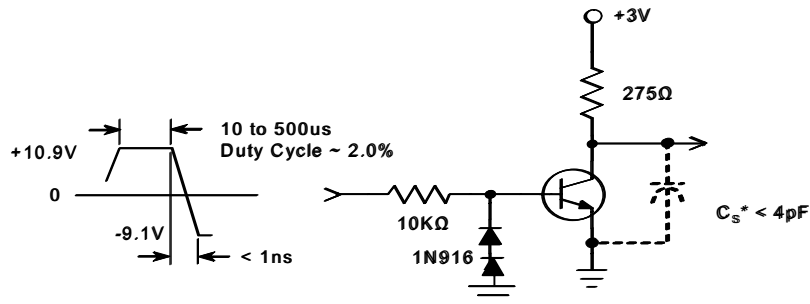


**Storage and Fall Time Equivalent Test Circuit**




**ELECTRICAL CHARACTERISTICS CURVE**

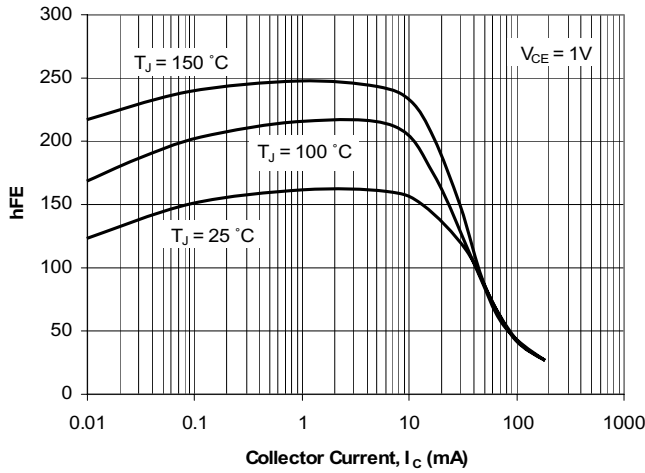


**Fig. 1. Typical h<sub>FE</sub> vs Collector Current**

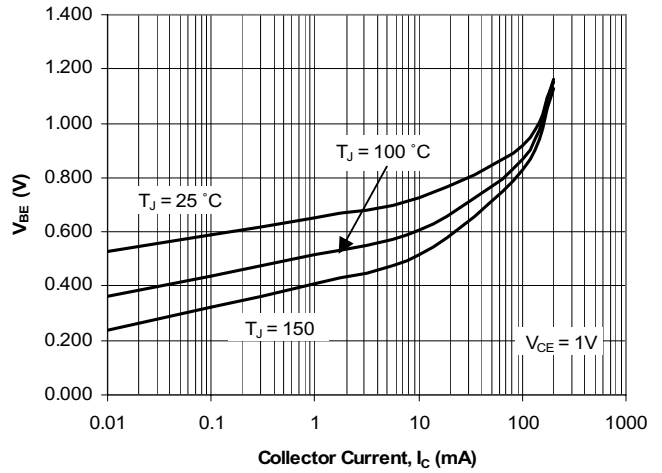


**Fig. 2. Typical V<sub>BE</sub> vs Collector Current**

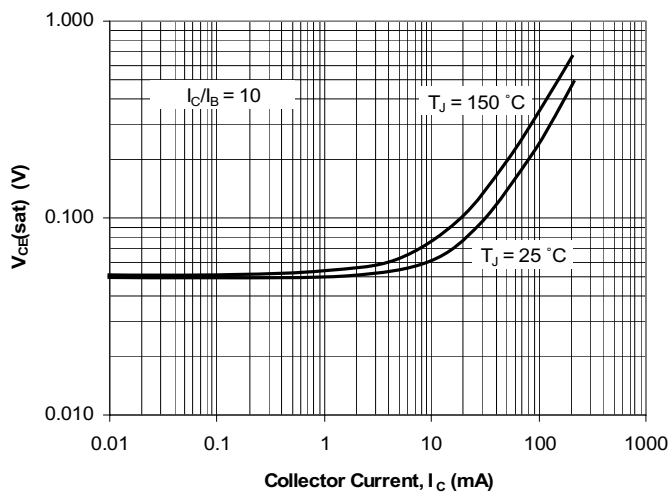

**Fig. 3. Typical V<sub>CE</sub> (sat) vs Collector Current**

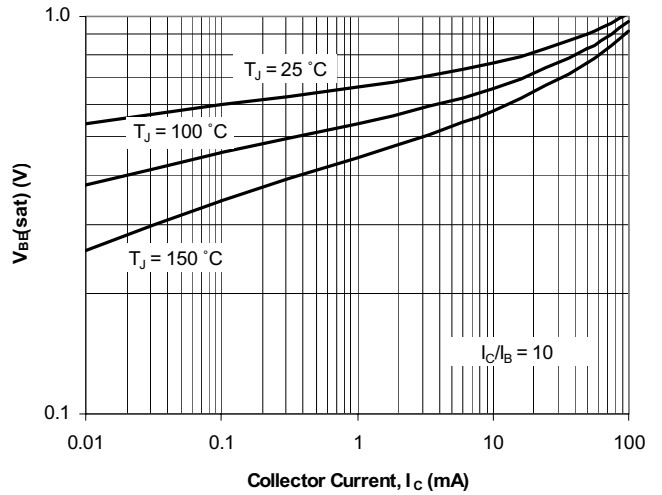

**Fig. 4. Typical V<sub>BE</sub> (sat) vs Collector Current**

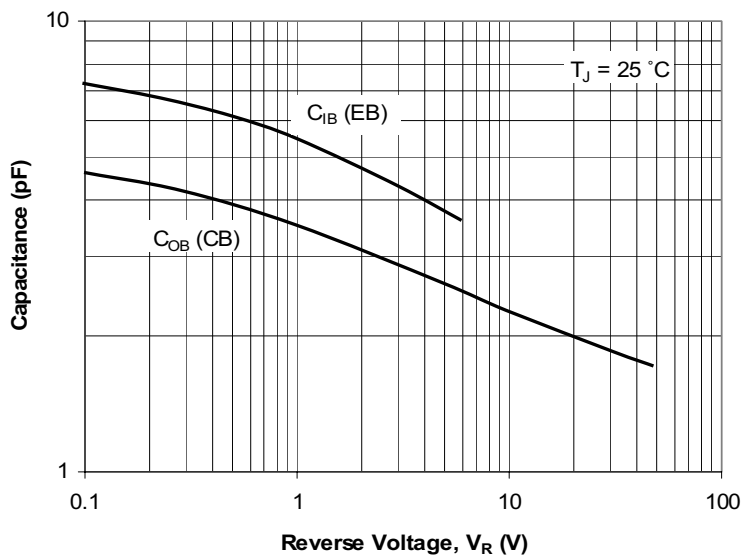


**Fig. 5. Typical Capacitances vs Reverse Voltage**



## MOUNTING PAD LAYOUT

SOT-23

Unit: inch (mm)

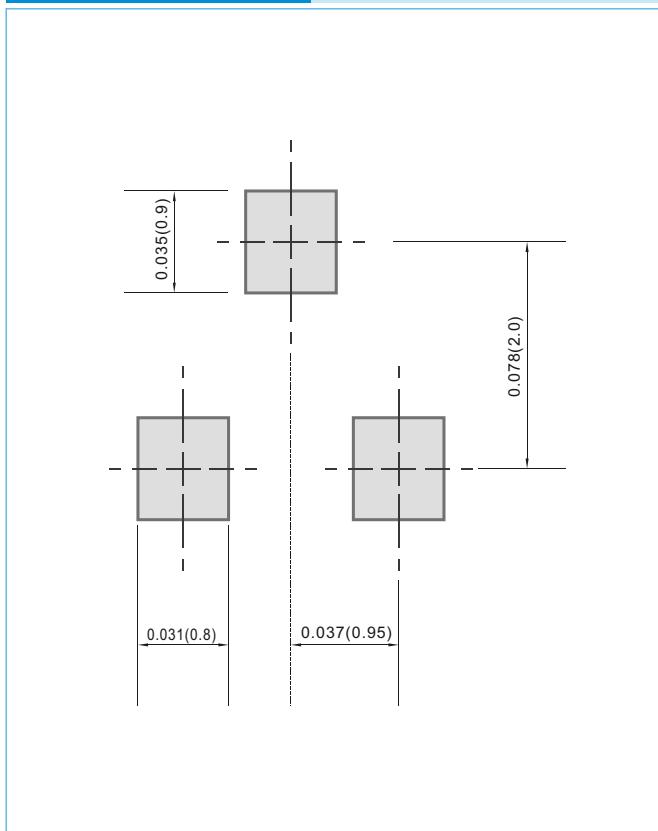

## ORDER INFORMATION

- Packing information

T/R - 12K per 13" plastic Reel

T/R - 3.0K per 7" plastic Reel

## LEGAL STATEMENT

### IMPORTANT NOTICE

This information is intended to unambiguously characterize the product in order to facilitate the customer's evaluation of the device in the application. The information will help the customer's technical experts determine that the device is compatible and interchangeable with similar devices made by other vendors. The information in this data sheet is believed to be reliable and accurate. The specifications and information herein are subject to change without notice. New products and improvements in products and product characterization are constantly in process. Therefore, the factory should be consulted for the most recent information and for any special characteristics not described or specified.

### Copyright Pan Jit International Inc. 2003

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract. The information presented is believed to be accurate and reliable, and may change without notice in advance. No liability will be accepted by the publisher for any consequence of use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.