



Integrated Mixed-Signal Solutions


## PRODUCT BRIEF

# STMP3410

### D-Major™ Audio Decoder with USB, LCD and Voice Record

#### FEATURES

- Decodes MP3 and WMA and is upgradeable to other digital music formats
- Supports WMA digital rights management and other security schemes
- Includes on-chip read only unique ID for digital rights management algorithms
- Hardware supports NAND Flash, SmartMedia, MMC, Secure Digital, CompactFlash, SDRAM, CD and IDE digital devices.
- Flexible, efficient on-chip DC-DC converter
- More than 35 hours of operation on a single AA battery (Alkaline 2850mAh or better)
- Designed to operate from many different battery configurations, including 1xAA, 1xAAA, 2xAA, 2xAAA, Lilon (2xAA, 2xAAA and Lilon configurations require 144-pin package)
- USB download interface
- LED/LCD Driver
- GPIO and button I/O controls
- Voice record in ADPCM format
- Volume control on record and playback
- Full analog mixer configuration
- <0.05% THD headphone driver, including anti-pop and short-circuit protection
- High performance 18-bit  $\Sigma\Delta$  technology
- Line-in to Line-out SNR >90 dB
- Mac and Windows drivers, also supports USB-Mass Storage Class
- Interface to a host chip/processor (optional)
- Upgradeable firmware
- DSP maximum speed is 65 MHz
- Energy saving dynamic power management
- Bass and Treble control; configurable multiple band control
- FM radio input and control support
- Three analog line-level inputs: Line\_In (stereo), FM\_In (stereo, 144-pin package only), and Mic (mono)
- Offered in 100-pin TQFP, 144-pin TQFP, and 144-pin fpBGA packages

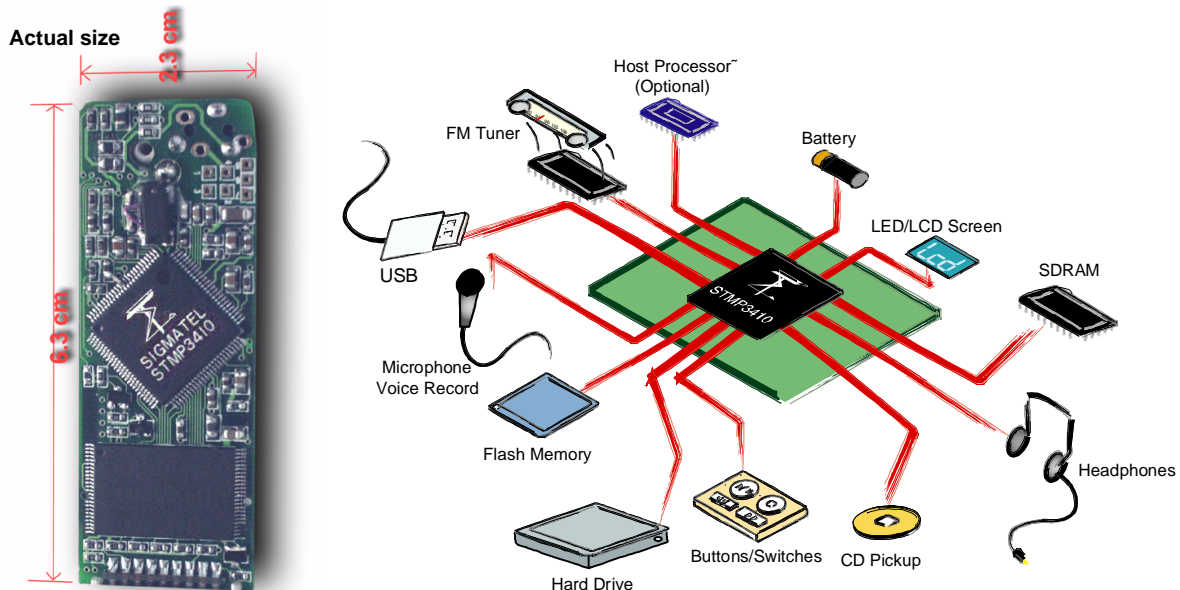

For designs as small as 14.5 cm<sup>2</sup>

5-3410-P1-5.0-0802

[www.DataSheet4U.com](http://www.DataSheet4U.com)

# STMP3410

D-Major™ Audio Decoder with USB, LCD and Voice Record



## DESCRIPTION

SigmaTel's STMP3410 is a second generation single-chip highly-integrated digital music system solution for devices such as digital audio players, PDAs, and cell phones. It includes an audio decoder with a high performance DSP, ADPCM record capabilities and a USB interface for downloading music and uploading voice recordings. The chip also includes a mixer, DAC, ADC and provides interfaces to CD-DSPs, flash memory, LED/LCDs, button & switch inputs, headphones, FM radio input & controls and a microphone. The chip's highly programmable architecture supports MP3, WMA, and other digital audio standards. WMA digital rights management and other security schemes are also supported. The end-user can download music and also update firmware through a USB interface. For devices like PDAs and cell phones, STMP3410 can act as a slave chip to a host chip/processor.

The DAC includes a headphone driver to directly drive low impedance headphones. The ADC includes inputs for both microphone and analog audio in to support voice recording & FM radio integration features. SigmaTel's proprietary Sigma-Delta ( $\Sigma\Delta$ ) technology achieves a DAC SNR in excess of 90 dB for high-quality audio playback.

The STMP3410 has low power consumption to allow long battery life and includes an efficient flexible on-chip DC-DC converter that allows many different battery configurations, including 1xAA, 1xAAA, 2xAA, 2xAAA and Lilon. In addition, the single-chip design and low pin count enables very small digital audio devices to be designed.

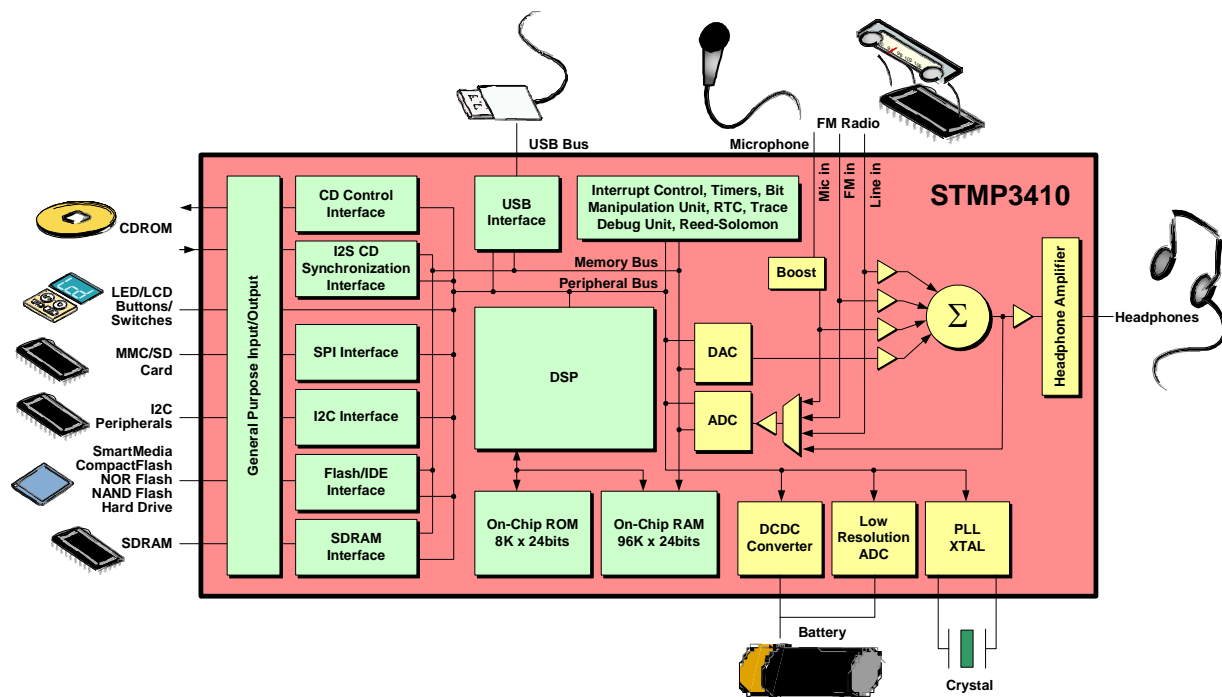


Figure 1. STMP3410 Block Diagram

## ADDITIONAL SUPPORT

Additional product and company information can be obtained by going to the SigmaTel website at: [www.sigmatel.com](http://www.sigmatel.com)