

Bluetooth V2.1^(a) EDR and RDS FM radio combo solution

Data Brief

Description

The STLC2592 combines Bluetooth, and FM tuner functionality into one product and is fully optimized for mobile applications such as mobile phones, smart phones, PDAs and portable media players. The required board space has been minimized, only 1 external component is needed, power consumption levels are targeted for battery powered devices and the integration allows a cost effective solution. Also due to the reduction of external components, manufacturers can easily and fast integrate the STLC2592 on their product to enable a rapid time to market. Compared to its successful predecessor, the STLC2590, it supports the latest Bluetooth specification V2.1^(a) + EDR ("Lisbon") and further optimizes the RF performances.

General features

- 100-pin WFBGA 5.0 mm x 7.5 mm x 0.8 mm, pitch 0.5 mm
- lead-free, RoHs compliant
- PCB footprint < 45 mm²

Bluetooth features

- The lowest power consumption by design and technology (see [Table 1](#)). Ultra low power architecture with 3 different low power modes: sleep, deep sleep and complete power down
- BT-WLAN coexistence support for several BT-WLAN coexistence algorithms (i.e. 2/3/4-wire PTA, in a very flexible and parametric way to optimize voice and data quality over Bluetooth and WLAN

a. Bluetooth specification V2.1 + EDR ("LISBON") was still in a preliminary state. "LISBON" features currently implemented comply to the preliminary "LISBON" specification from October 2006.



- ARM7TDMI and on-chip RAM (included patch RAM) and ROM
- Communication interfaces
 - Fast UART up to 4 Mbps for HCI
 - Flexible SPI interface up to 13 MHz for HCI
 - PCM interface for voice
 - Wireless LAN coexistence with 2, 3, 4 wires
 - Flexibly programmable GPIOs
 - Fast I2C interface as master
- Software support up to HCI stack
 - H4 HCI transport layer
 - HCI proprietary commands and single HCI command for patch/upgrade download
- Supports 2.75 V supply voltage and 1.65 V to 2.85 V I/O voltage
- Clock support for all cellular standards: system clock and low power clock
- Bluetooth V2.1 + EDR ("Lisbon") compliant^(a)
 - Encryption Pause/Resume (EPR)
 - Extended Inquiry Response (EIR)
 - Link Supervision Time Out (LSTO)
 - Secure simple pairing
 - Sniff subrating
 - Quality of Service (QoS)
 - Packet Boundary Flag
 - Erroneous Data Delivery
- Backward compatibility with legacy devices including extended V1.2 feature support
 - Adaptive Frequency Hopping (AFH)
 - Faster connections through interlaced scan
 - Extended SCO (eSCO) links
 - Full EDR support and all BT1.2 errata
 - All EDR data rates and packet types
 - Channel Quality Driven Data Rate change

- Point-to-point and point-to-multi-point (up to 7 slaves) and scatternet capability
- Asynchronous Connection-Less (ACL) logical transport link
- Synchronous Connection Oriented (SCO) link for 2 simultaneous SCO channels at 64 kbps
- Superior voice quality
 - Pitch-Period Error Concealment (PPEC) for improved speech quality (in the vicinity of interference)
- Extended range due to higher (than class 2) Tx output power
- Pre-calibrated RF
 - Auto calibration (VCO, filters), no RF calibration required in production

FM radio features

- Worldwide FM band support (76-108 MHz)
- Frequency synthesizer with integrated VCO
- Seek tuning
- Signal strength measurement
- Programmable de-emphasis (50/75 μ s)
- Adaptive noise suppression
- Volume control
- Line-level analog output
- 32.768 kHz reference clock
- RDS/RBDS processor
- 2-wire and 3-wire control interface
- 2.7 V to 5.5 V supply voltage
- Integrated LDO regulator allows direct connection to battery

Figure 1. STLC2592 architecture

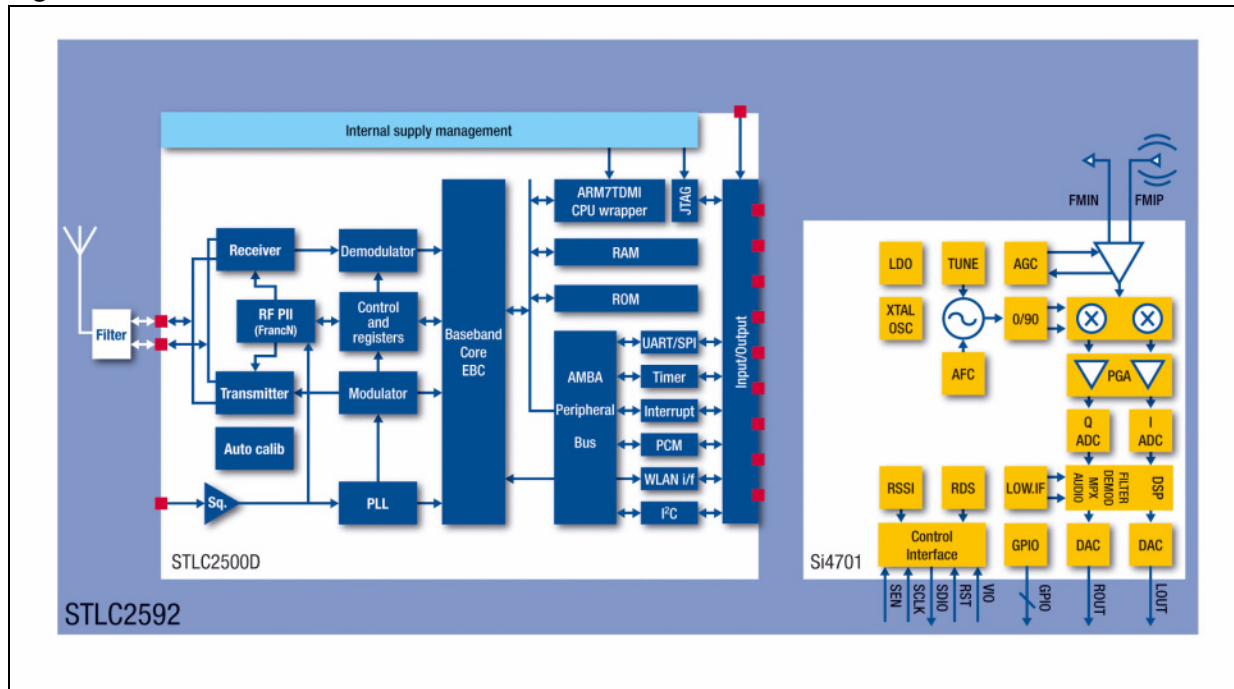


Table 1. Technical specifications

Parameter	Typ.	Unit
Bluetooth parameters		
Complete power-down	1	µA
Deep sleep	20	µA
Audio communication (HV3, slave, sniff 1.28s/2 attempts/0 time-outs)	10.6	mA
Audio communication (eSCO, 3-EV3, 64 kbps symmetrical TSCO=18, master)	6.5	mA
Data communication (3-DH5, master or slave, 1306.9 kbps)	35.4	mA
Data rate throughput at host interface in EDR mode	2.178	Mbps
FM radio parameters		
Sensitivity	2.5	µV EMF
RDS sensitivity	15	µV EMF
Adjacent channel sensitivity (+/-200 kHz)	50	dB
Audio S/N	63	dB
Supply current	17.6	mA
Power-down current	4	µA

Ordering information

Table 2. Order codes

Part Number	Package	Packing
E-STLC2592	WFBGA100	Tray
E-STLC2592TR	WFBGA100	Tape-on-reel

Revision history

Table 3. Document revision history

Date	Revision	Changes
15-Jan-2007	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com