


ULTRA High Power 980nm Pump Laser Module - Grating Stabilized, 750mW LC96U*

These lasers are designed as pump sources for erbium doped fiber amplifier (EDFA) applications. Processes and techniques of coupling the fiber to the laser allow high output powers that are very stable with both time and temperature. The grating is located in the pigtail to stabilize the wavelength.

Devices are available with kink free output powers to 750mW.


The LC96 'U' series pump module utilises a double Fiber Bragg Grating design for enhanced wavelength and power stability performance. This product has been designed to ensure superior wavelength locking over drive current, temperature and optical feedback changes.

Features:

- Double Fiber Bragg Grating wavelength stabilization
- Ultra High output power, up to 750mW kink free
- Polarization maintaining fiber pigtail
- Internal thermoelectric heatpump and monitor photodiode
- Hermetically sealed 14 pin butterfly package
- Telcordia GR-468-CORE compliant
- Field proven high reliability
- RoHS compliant 

Applications:

- Low noise erbium doped fiber amplifiers (EDFAs)
- Dense wavelength division multiplexing (DWDM) EDFAs
- CATV Applications

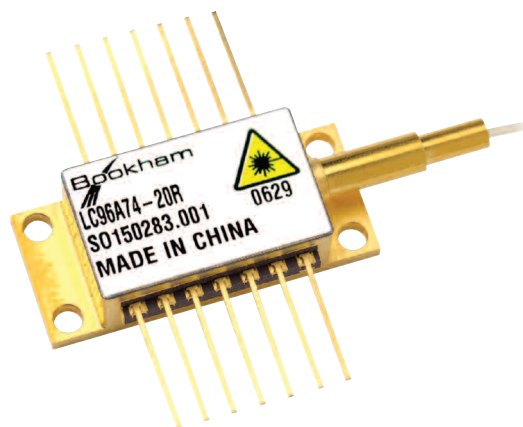

Characteristics

Conditions unless otherwise stated: Case temperature -20 to +75°C
 Submount temperature 20°C
 Monitor diode bias -5V
 CW operation

Kink-free fiber-coupled output power: LC96UA74-20R 625mW
 LC96UB74-20R 650mW
 LC96UC74-20R 675mW
 LC96UD74-20R 700mW
 LC96UE74-20R 725mW
 LC96UF74-20R 750mW

Parameter	Min	Typ	Max	Unit
Threshold current (I_{th})		40	55	mA
Operating drive current (I_f)			1080	mA
Forward voltage		2.2	2.6	V
Centre wavelength (λ_c)	973	974	975	nm
Spectrum stability (t = 60 secs)			±0.2	nm
Temperature dependence of peak wavelength			0.02	nm/°C
Monitor detector responsivity	1.0		10	µA/mW
Monitor dark current			50	nA
Thermistor resistance (at 20°C)	11.8	12.3	12.8	kΩ
Power Stability Peak-to-peak, T = 60s, DC to 50kHz sampling, T _c = 25°C				
>30mW			0.15	dB
20 – 30mW			0.25	dB
10 – 20mW			0.5	dB
Heatpump current ($\Delta T = 55^\circ\text{C}$, $I_f = I_f \text{ max}$)			2.2	A
Heatpump voltage ($\Delta T = 55^\circ\text{C}$, $I_f = I_f \text{ max}$)			3.3	V

Absolute Maximum Ratings

Parameter	Min	Max	Unit
Operating temperature	-20	75	°C
Storage temperature	-40	85	°C
Laser forward current		1500	mA
Laser reverse voltage		2	V
Heatpump current		2.4	A
Lead soldering temperature (10s max)		350	°C
Fibre bend radius	30		mm

Package Outline Drawing and Dimensions

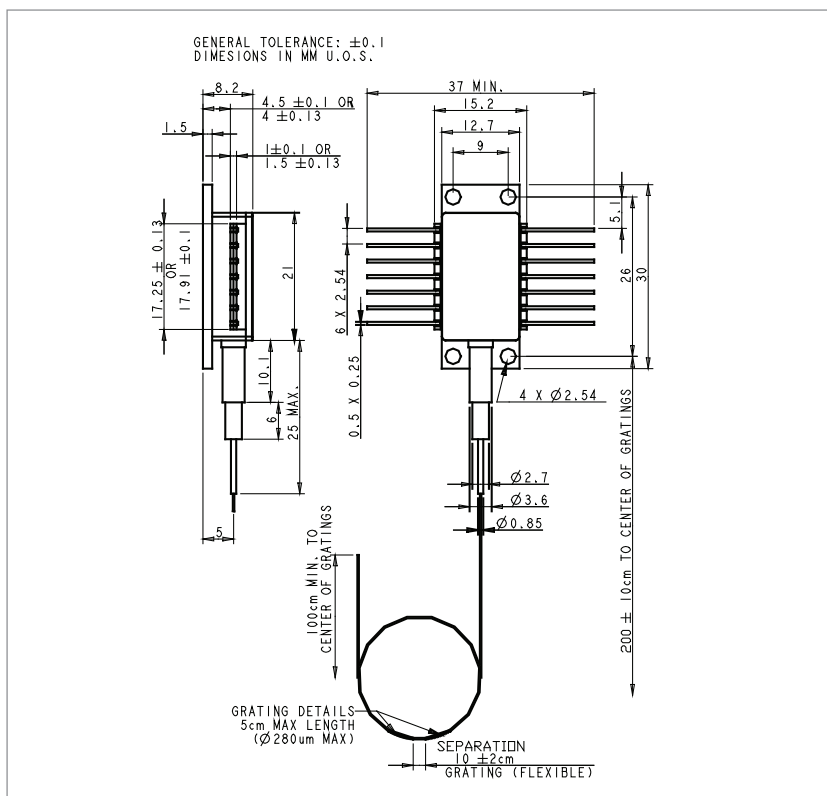


Figure 1: Package Outline Drawing and Dimensions (mm)

Fiber Specification

Nufern PM980-HP or equivalent 250µm primary coated.

Connections

Pin #	Description	Pin #	Description
1	Peltier cooler (+)	8	Not connected
2	Thermistor	9	Not connected
3	Monitor anode (-)	10	Laser anode (+)
4	Monitor cathode (+)	11	Laser cathode (-)
5	Thermistor	12	Not connected
6	Not connected	13	Case ground
7	Not connected	14	Peltier cooler (-)

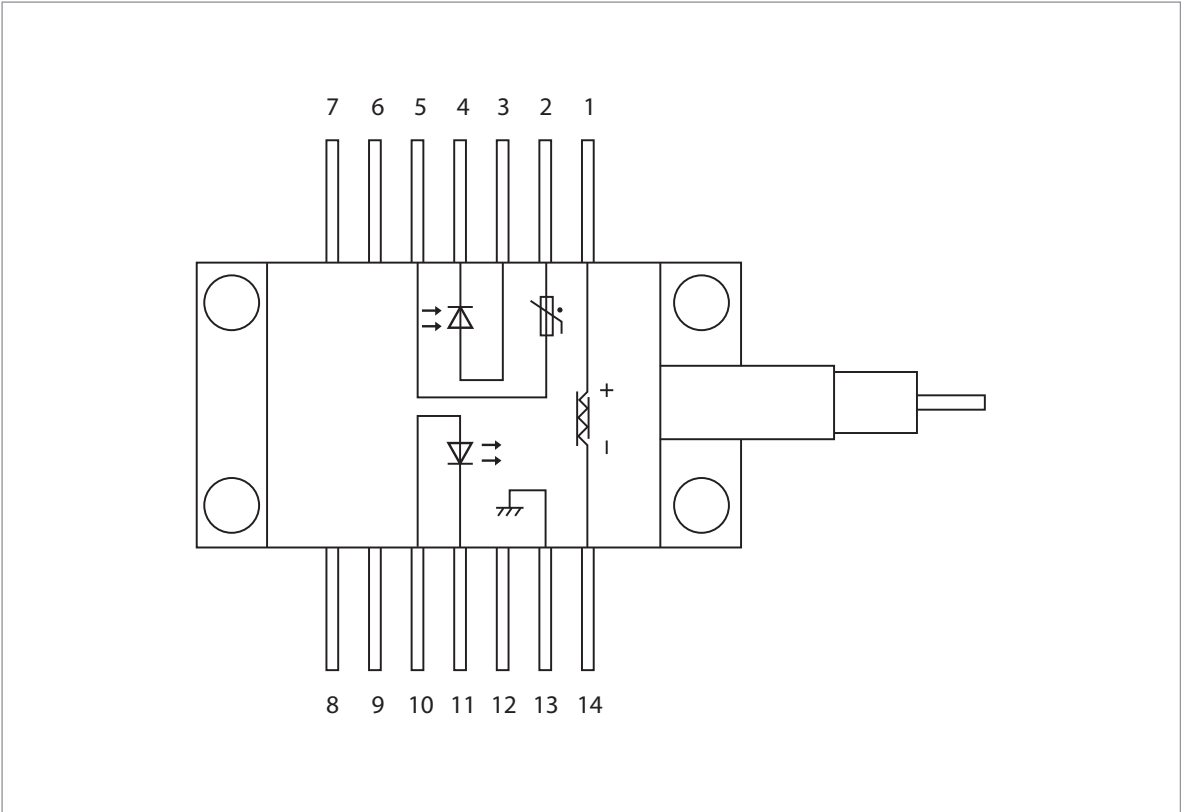


Figure 2: Connections

RoHS Compliance



Bookham is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information:

LC96UA74-20R 625mW
LC96UB74-20R 650mW
LC96UC74-20R 675mW
LC96UD74-20R 700mW
LC96UE74-20R 725mW
LC96UF74-20R 750mW

Contact Information

North America Bookham Worldwide Headquarters

2584 Junction Ave.
San Jose
CA 95134
USA

- Tel: +1 408 919 1500
- Fax: +1 408 919 6083

www.bookham.com
sales@bookham.com

Europe Paignton Office

Brixham Road
Paignton
Devon
TQ4 7BE
United Kingdom

- Tel: +44 (0) 1803 66 2000
- Fax: +44 (0) 1803 66 2801


Asia Shenzhen Office

2 Phoenix Road
Futian Free Trade Zone
Shenzhen 518038
China

- Tel: +86 755 33305888
- Fax: +86 755 33305805
+86 755 33305807

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Bookham before they become applicable to any particular order or contract. In accordance with the Bookham policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Bookham or others. Further details are available from any Bookham sales representative.



REFERENCE IEC 60825-1
Edition 1.2



Caution - use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.