



# MMVL3401TG


## SURFACE MOUNT PIN DIODE

**VOLTAGE** 35 Volts **POWER** 200 mW

**SOD-723** Unit: inch ( mm )

### FEATURES

Very low series resistance at 100MHz (0.45  $\Omega$  typical@ $I_F=10mA$ )  
 Low capacitance (0.8pF typical@ $V_R=20V$ )  
 Surface mount package ideally suited for automatic insertion  
 In compliance with EU RoHS 2002/95/EC directives

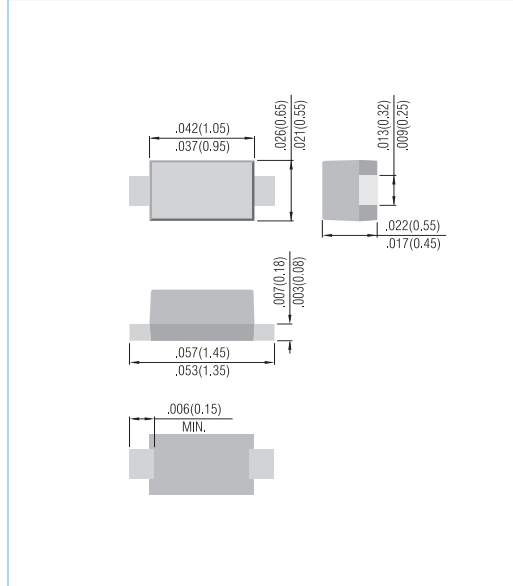

### MECHANICAL DATA

Case: SOD-723 plastic  
 Terminals : Solderable per MIL-STD-750,Method 2026  
 Approx. Weight : 0.0007gram  
 Device Marking : BK

### ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNITS
Maximum Reverse Voltage	$V_R$	35	V
Continuous Forward Current	$I_F$	0.2	A
Power Dissipation <sup>(1)</sup>	$P_{TOT}$	200	mW
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	$^{\circ}C$

### THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	VALUE	UNITS
Thermal Resistance , Junction to Ambient <sup>(1)</sup>	$R_{\theta JA}$	625	$^{\circ}C/W$

Note 1 : FR-5 Board 1.0 x 0.75 x 0.062 in.







# MMVL3401TG

## ELECTRICAL CHARACTERISTICS ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=10\mu\text{A}$	35	-	-	V
Reverse Current	$I_R$	$V_R=25\text{V}$	-	-	100	nA
Series Resistance	$R_S$	$I_F=10\text{mA}, f=100\text{MHz}$	-	0.45	0.7	$\Omega$
Total Capacitance	$C_T$	$f=1.0\text{MHz}; V_R=20\text{V}$	-	-	1.0	pF

### ELECTRICAL CHARACTERISTICS CURVE

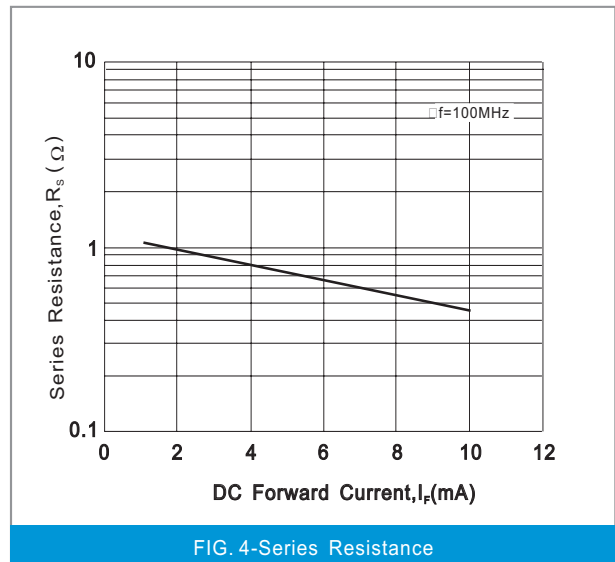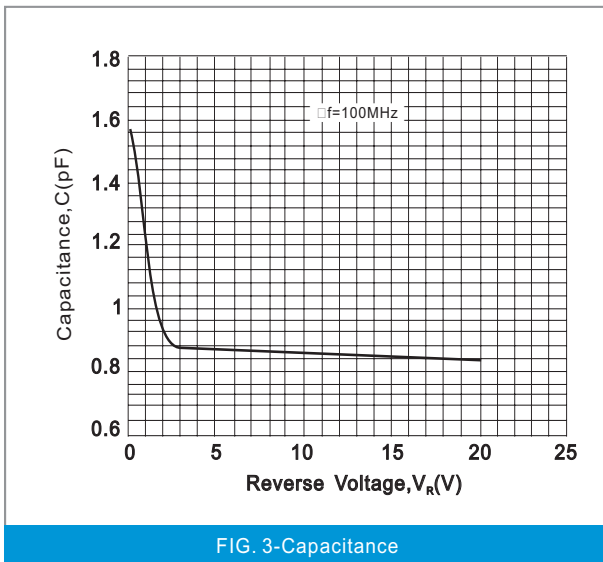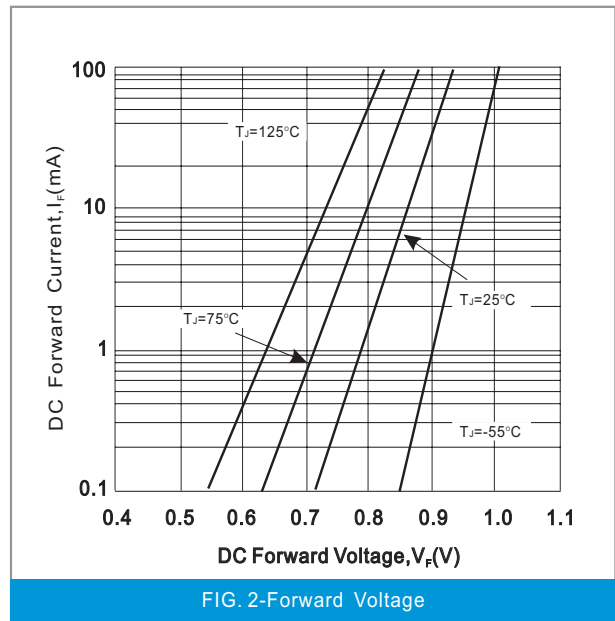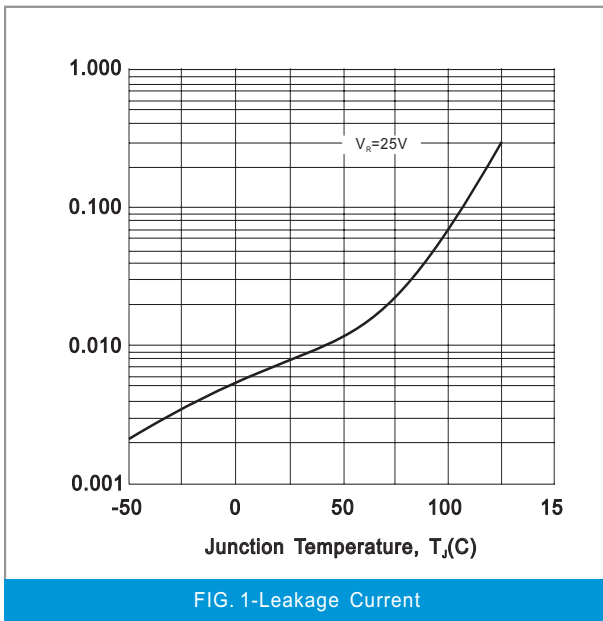




# MMVL3401TG

## MOUNTING PAD LAYOUT

SOD-723

Unit: inch ( mm )

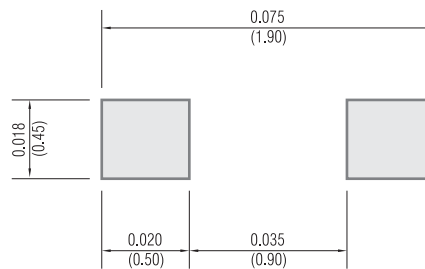

## ORDER INFORMATION

- Packing information

T/R - 8K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2007

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.