




**DB LECTRO** L I C  
*COMPOSANTS ÉLECTRONIQUES*  
*ELECTRONIC COMPONENTS*



**Pin Type**      **PK-35A29EP-110Q , PF-35A29EP-110Q , PL-35A29EP-110Q**

## Dimensions and material

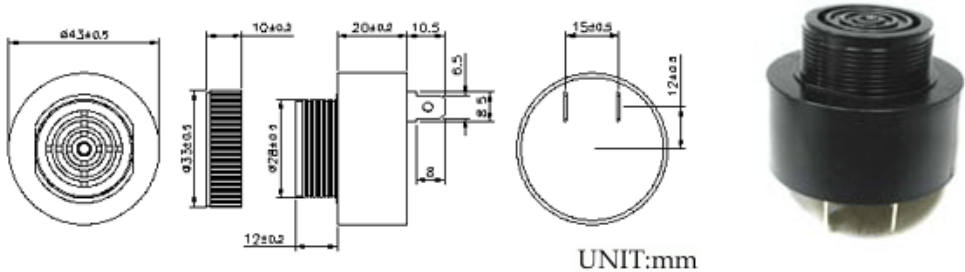

## Electrical Characteristics

Model Number	K-35A29EP-110Q	PF-35A29EP-110Q	PL-35A29EP-110Q	Unit
Resonant Frequency		2.9 ± 0.5		KHz
Operating Voltage		30~120		VDC VAC
Rated Voltage		110		VDC VAC
Sound Pressure Level(Min)		95 at 30cm at Rated Voltage		dB
Current Consumption(Max)		25 at Rated Voltage		mA
Tone Sweep(Pulse)Rate at Rated Voltage(Hz) ± 20 %	Constant	Fast Pulse 3.0	Slow Pulse 1.2	
Operating Temperature		-20 ~ +70		°C
Storage Temperature		-30 ~ +80		°C

# DB LECTRO<sup>U</sup><sub>Z</sub>

## Voltage/Current/Sound Pressure

