


**K-Band Packaged Power Amplifier**

**TGA4525-SM**




**Key Features and Performance**

- 17GHz - 27GHz Bandwidth
- 22 dB Typical Gain
- 37 dBm Typical OTOI
- 29 dBm Typical P1dB
- Vd = 7V, Id = 760mA (Id = 830mA @ P1dB)
- Package Dimensions: 5.0 x 5.0 x 1.10 mm

**Measured Performance**

Vd = 7V, Id = 760mA

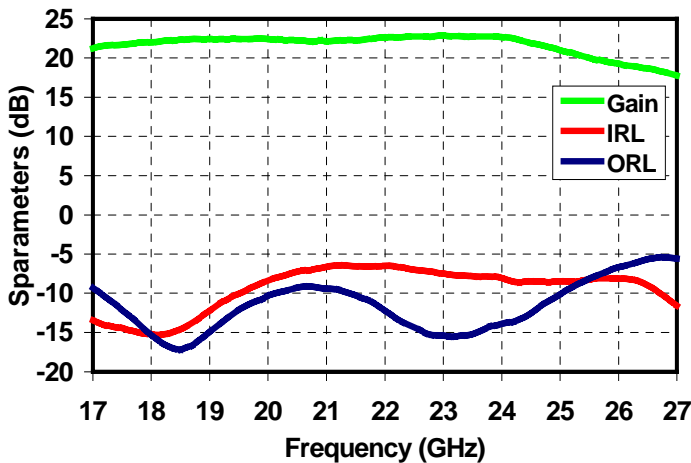

**Primary Applications**

- Point-to-Point Radio
- K-Band Sat Com
- Point-to-Multipoint Communications

**Product Description**


The TriQuint TGA4525-SM is a packaged high power amplifier for K-Band applications. The part is designed using TriQuint's proven standard 0.25µm gate power pHEMT production process.

The TGA4525-SM provides a nominal 29dBm output power at 1dB gain compression with a small signal gain of 22dB.

The part is ideally suited for low cost emerging markets such as K-Band satellite communications, point-to-point & point-to-multipoint communications.

Evaluation boards are available upon request.

Lead-Free & RoHS compliant.

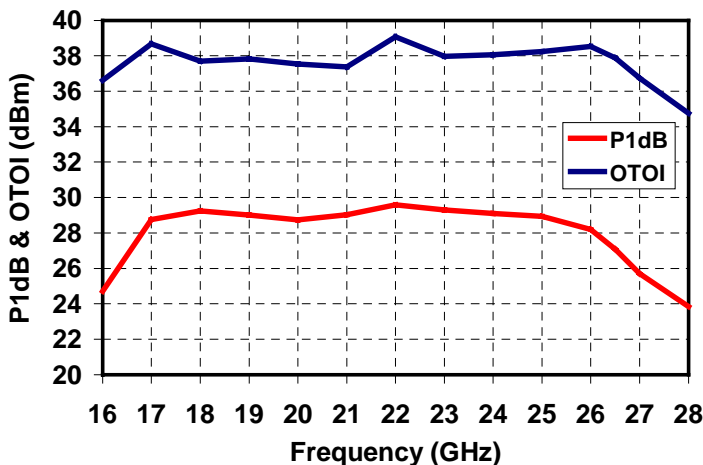

Note: This device is early in the characterization process prior to finalizing all electrical test specifications. Specifications are subject to change without notice.

**TABLE I**  
**MAXIMUM RATINGS** <sup>1/</sup>

Symbol	Parameter	Value	Notes
V <sub>d</sub>	Drain Supply Voltage	8 V	<u>2/</u>
I <sub>d</sub>	Drain Supply Current (Quiescent)	880 mA	<u>2/</u>
V <sub>g</sub>	Gate Voltage Range	-5 to 0 V	
I <sub>g</sub>	Gate Supply Current	28 mA	
P <sub>IN</sub>	Input Continuous Wave Power	26 dBm	<u>2/</u>
P <sub>D</sub>	Power Dissipation	5.3 W	<u>2/ 3/</u>
T <sub>CH</sub>	Operating Channel Temperature	150 °C	<u>4/</u>
T <sub>M</sub>	Mounting Temperature (10 seconds)	260°C	
T <sub>STG</sub>	Storage Temperature	-65 to 150 °C	

- <sup>1/</sup> These ratings represent the maximum operable values for this device
- <sup>2/</sup> Combinations of supply voltage, supply current, input power, and output power shall not exceed P<sub>D</sub> at a package base temperature of 70°C
- <sup>3/</sup> When operated at this bias condition with a baseplate temperature of 70°C, the MTTF is reduced to 1.0E+6 hours
- <sup>4/</sup> Junction operating temperature will directly affect the device median time to failure (MTTF). For maximum life, it is recommended that junction temperatures be maintained at the lowest possible levels.

**TABLE II**  
**THERMAL INFORMATION**



Parameter	Test Conditions	T <sub>CH</sub> (°C)	R <sub>θJC</sub> (°C/W)	MTTF (hrs)
R <sub>θJC</sub> Thermal Resistance (Channel to Backside of package)	V <sub>d</sub> = 7V I <sub>d</sub> = 760mA P <sub>DISS</sub> = 5.3W T <sub>BASE</sub> = 70°C	150	15.1	1E+6

Note: Thermal transfer is conducted through the bottom of the TGA4525-SM package into the motherboard. The motherboard must be designed to assure adequate thermal transfer to the base plate.



**TABLE III**  
**RF CHARACTERIZATION TABLE**  
( $T_A = 25^\circ\text{C}$ , Nominal)  
( $V_d = 7\text{V}$ ,  $I_d = 760\text{mA} \pm 5\%$ )

Symbol	Parameter	Test Conditions	Typ	Units
Gain	Small Signal Gain	F = 17 – 27 GHz	22	dB
IRL	Input Return Loss	F = 17 – 27 GHz	-8	dB
ORL	Output Return Loss	F = 17 – 27 GHz	-10	dB
P1dB	Output Power @ 1dB Gain Compression	F = 17 – 27 GHz	29	dBm
Psat	Saturated Power	F = 17 – 27 GHz	31	dBm
OTOI	Output Third Order Intercept @ Pin = -10dBm	F = 17 – 27 GHz	37	dBm
	Small Signal Gain Temperature Coefficient	F = 17 – 27 GHz	0.04	dB/ $^\circ\text{C}$

**Measured Performance**

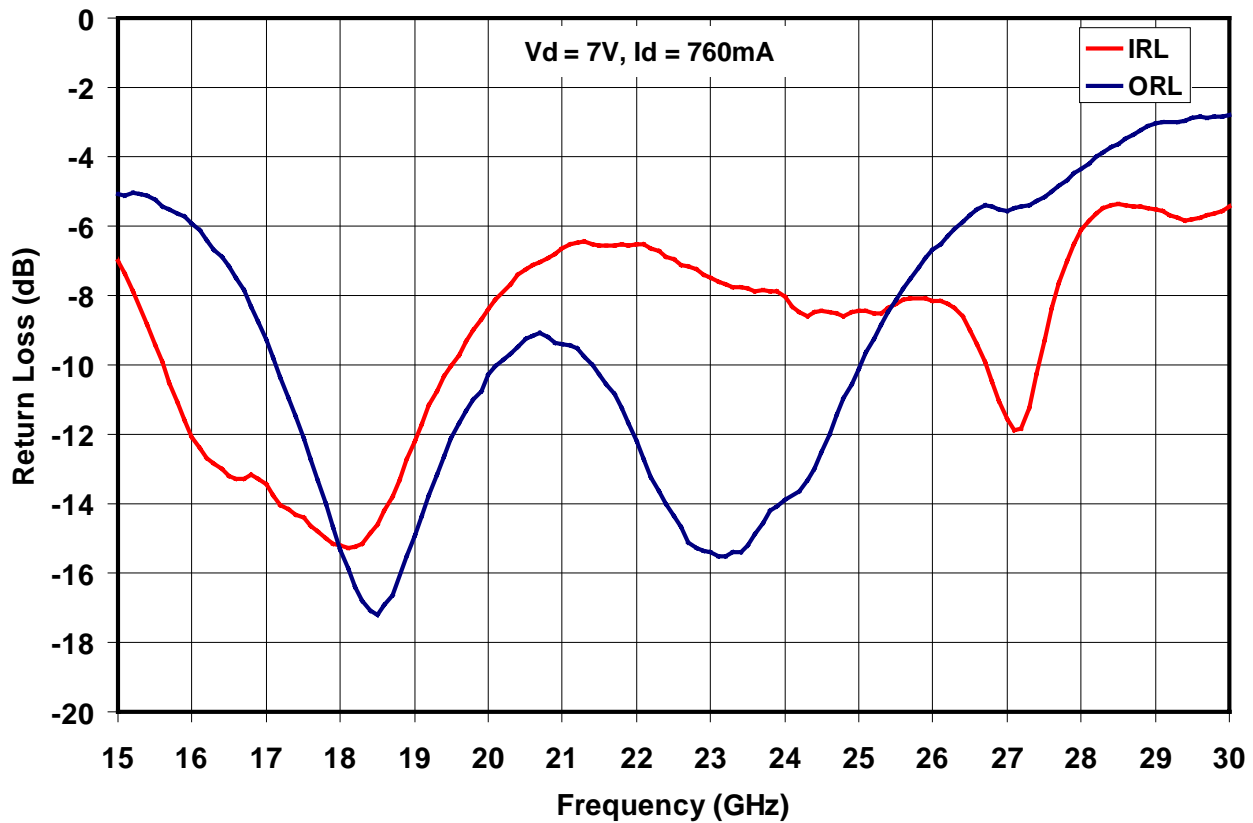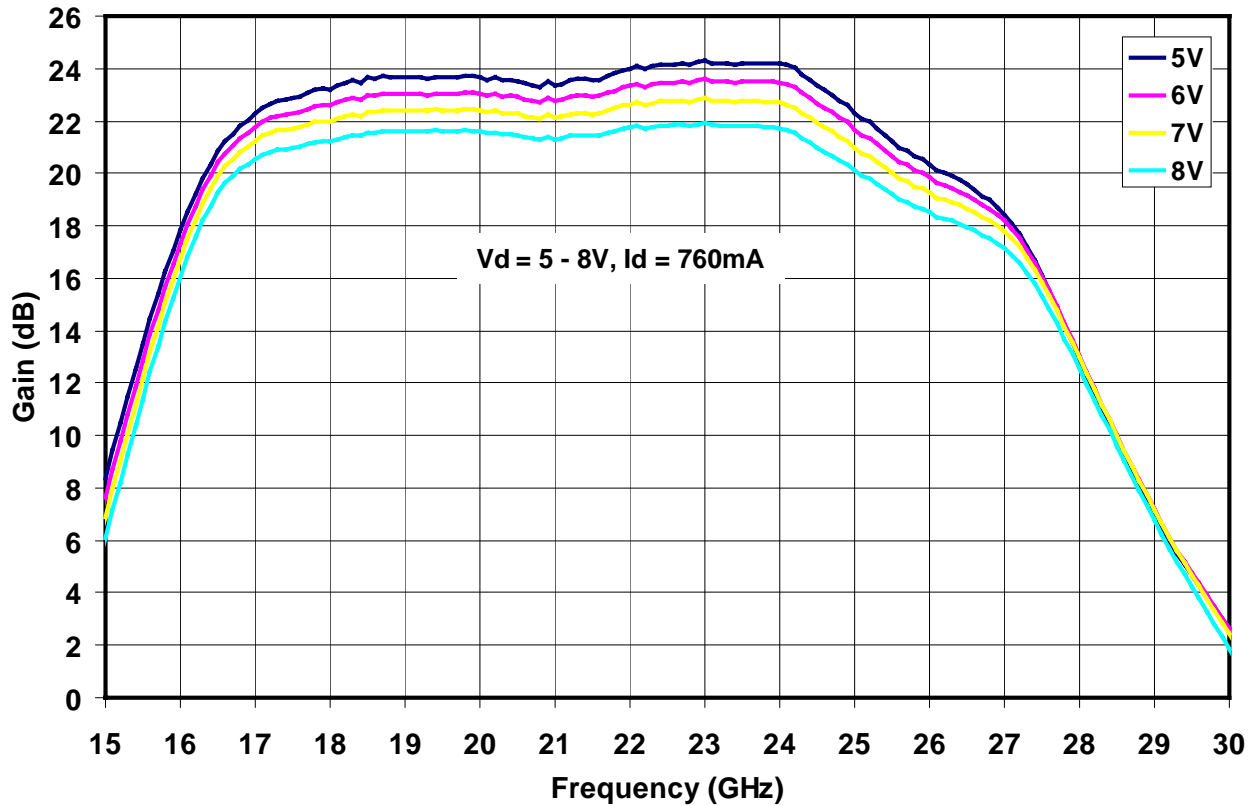



**Measured Performance**

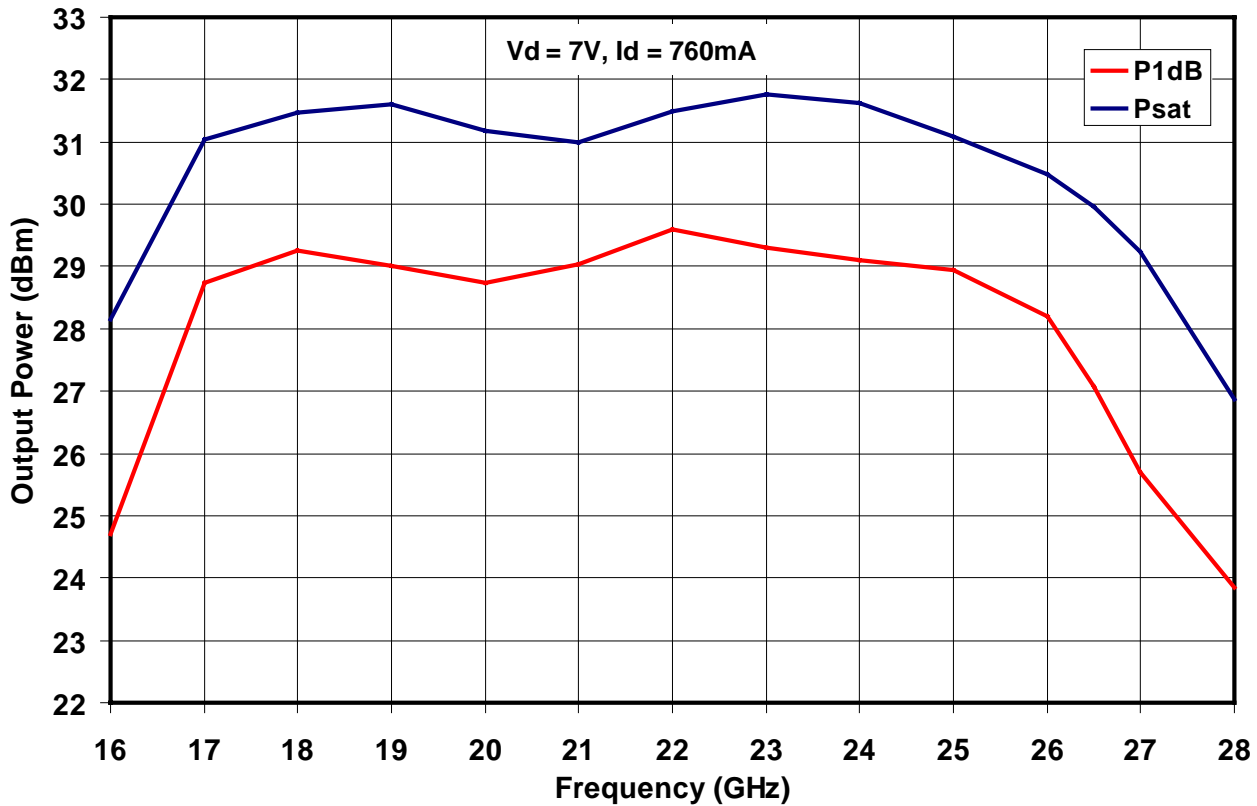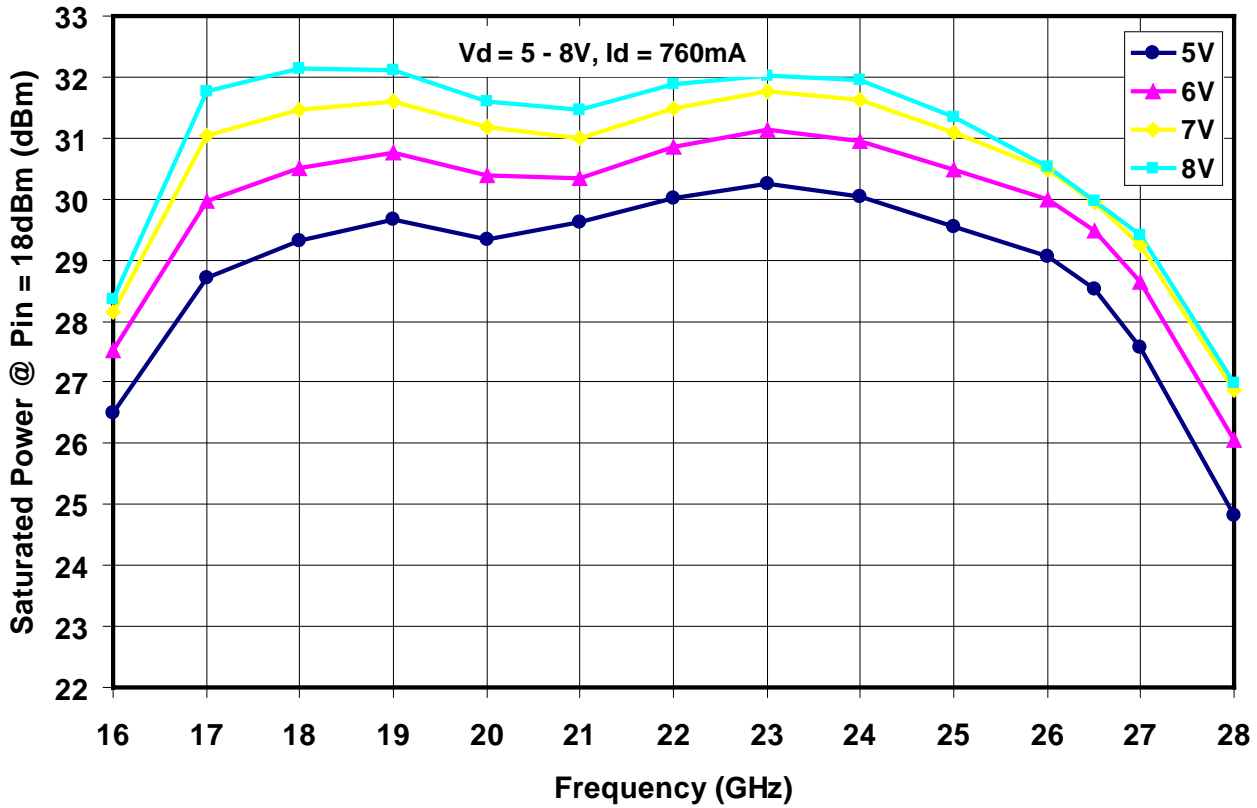

**Measured Performance**

**TGA4525-SM**



Vd = 7V, Id = 760mA

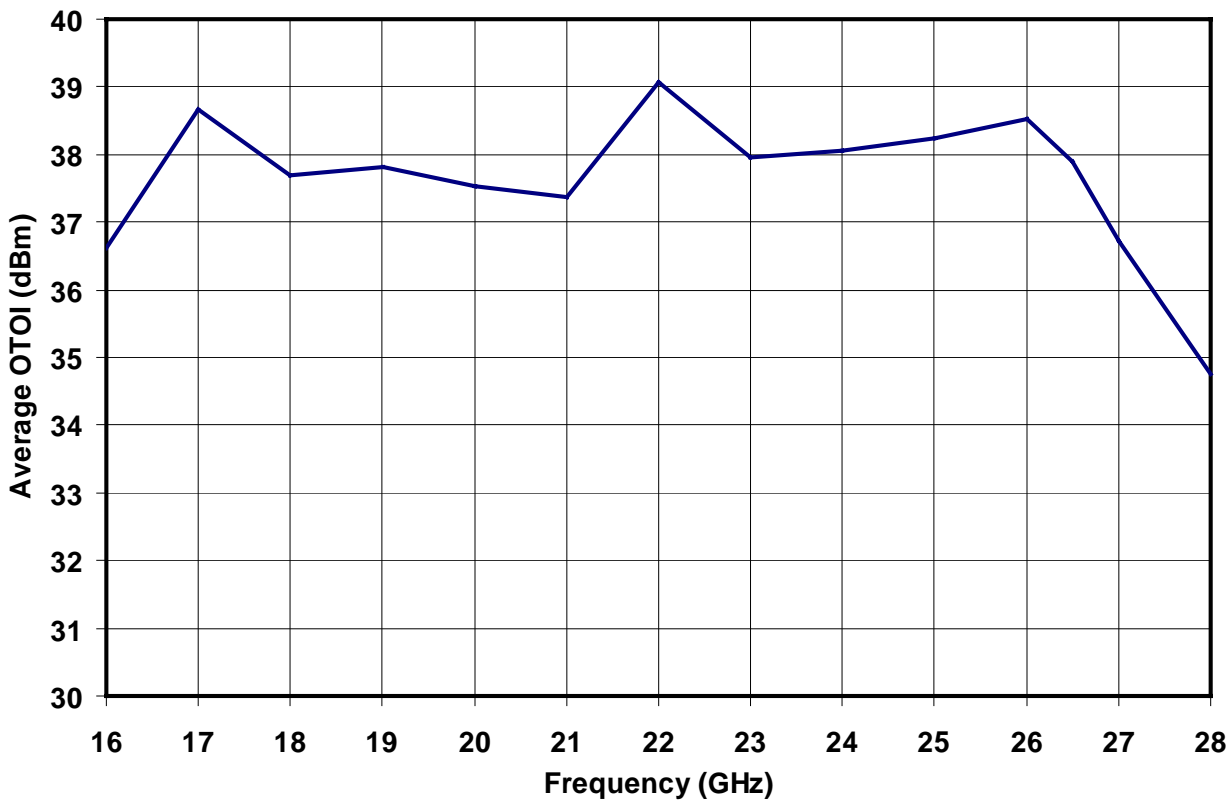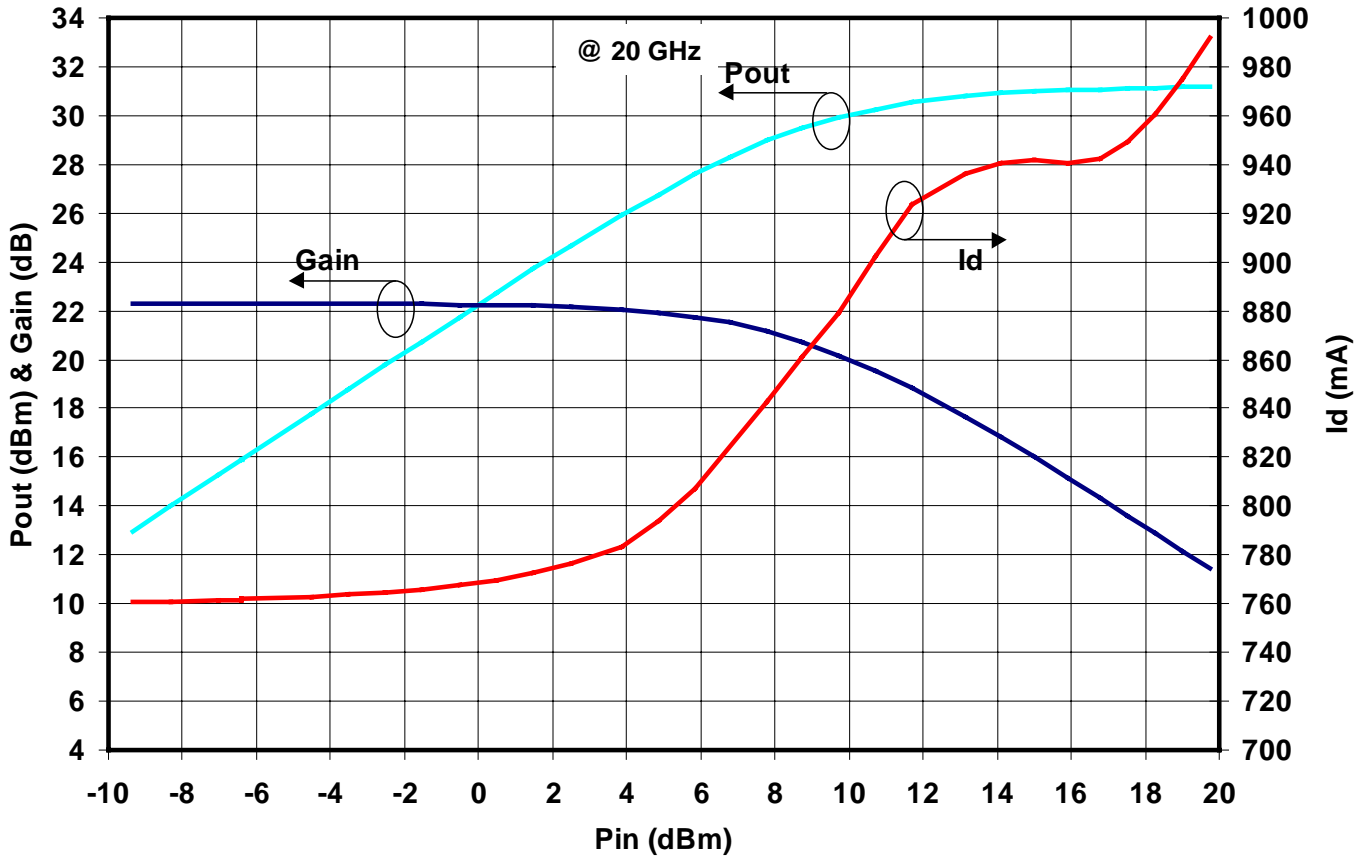


**Measured Performance**

**TGA4525-SM**

Vd = 7V, Id = 760mA

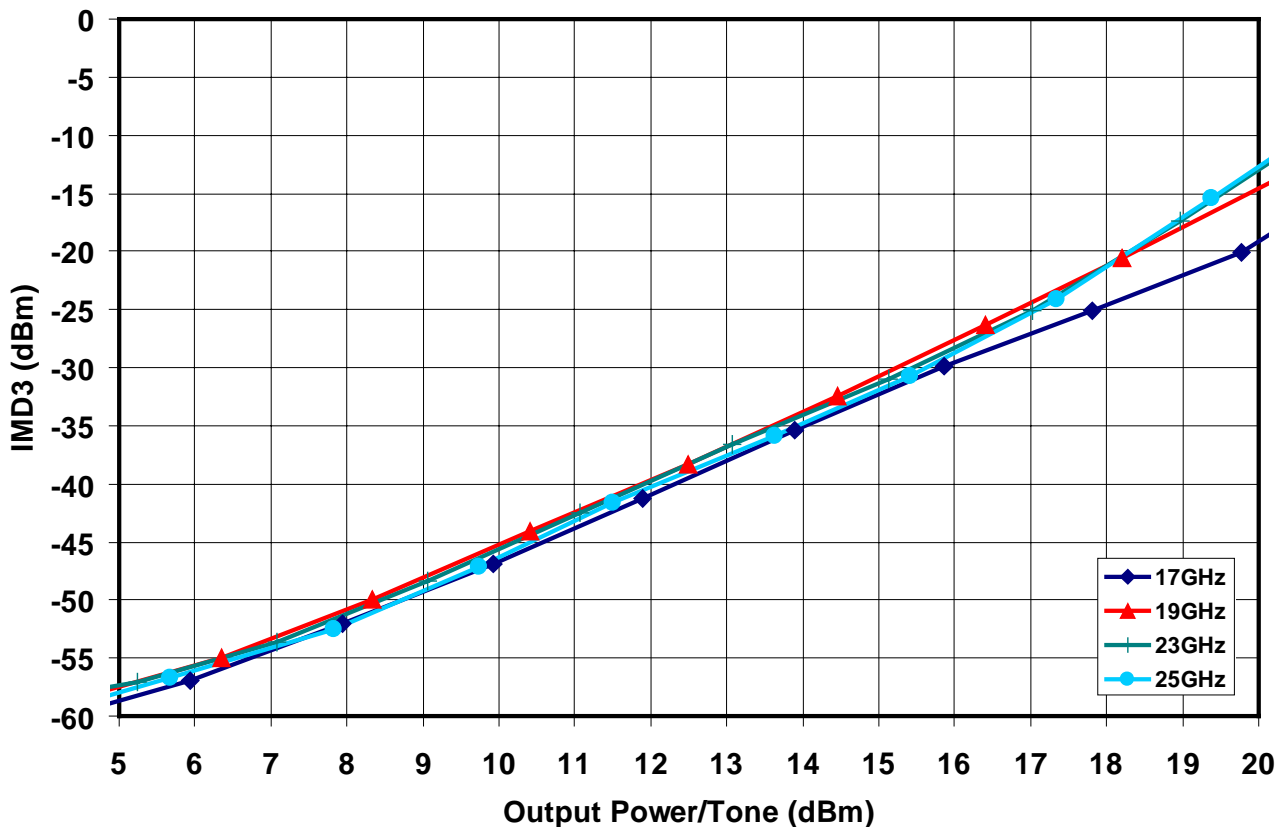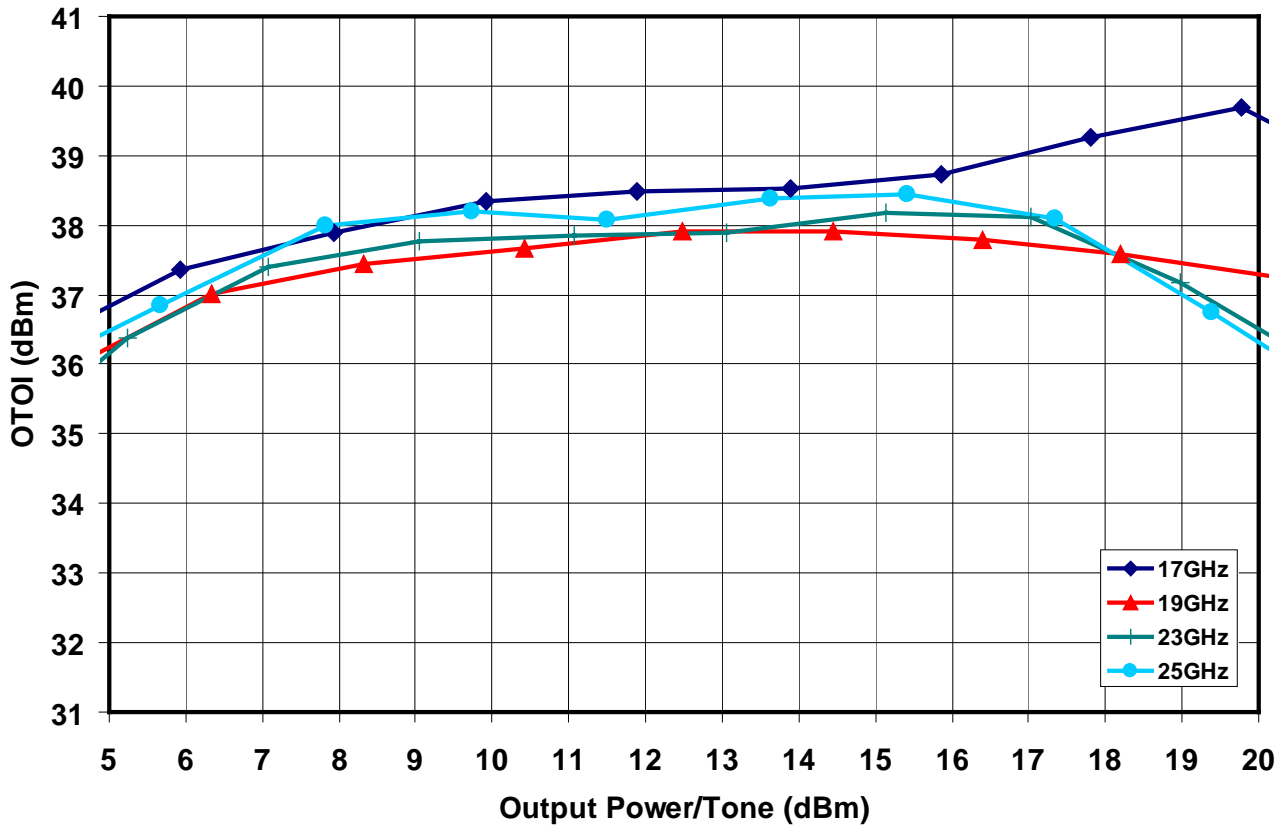

**Package Pinout**

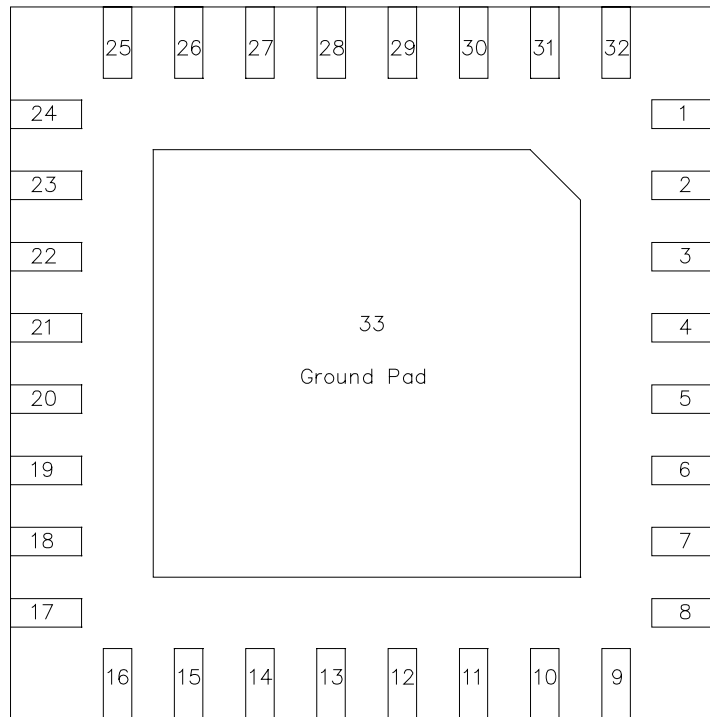

**Bottom View**



<b>Description</b>	<b>Pin Number</b>
RF Input	4
RF Output	21
Vd	14, 26
Vg	10, 30
Ground	1, 8, 9, 16, 17, 24, 25, 32, 33*
N/C	2, 3, 5, 6, 7, 11, 12, 13, 15, 18, 19, 20, 22, 23, 27, 28, 29, 31

\* Center pad is used for Ground as well as heat dissipation of the part.






**Characterization Board**

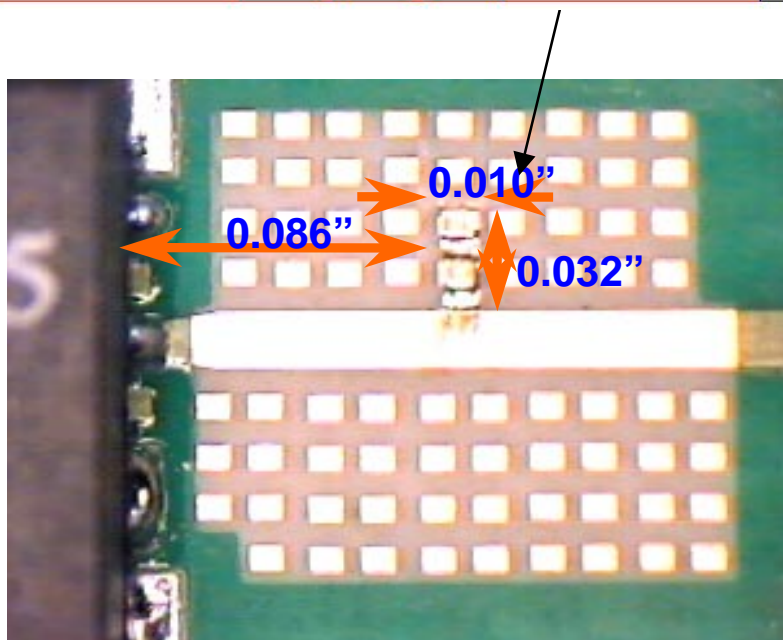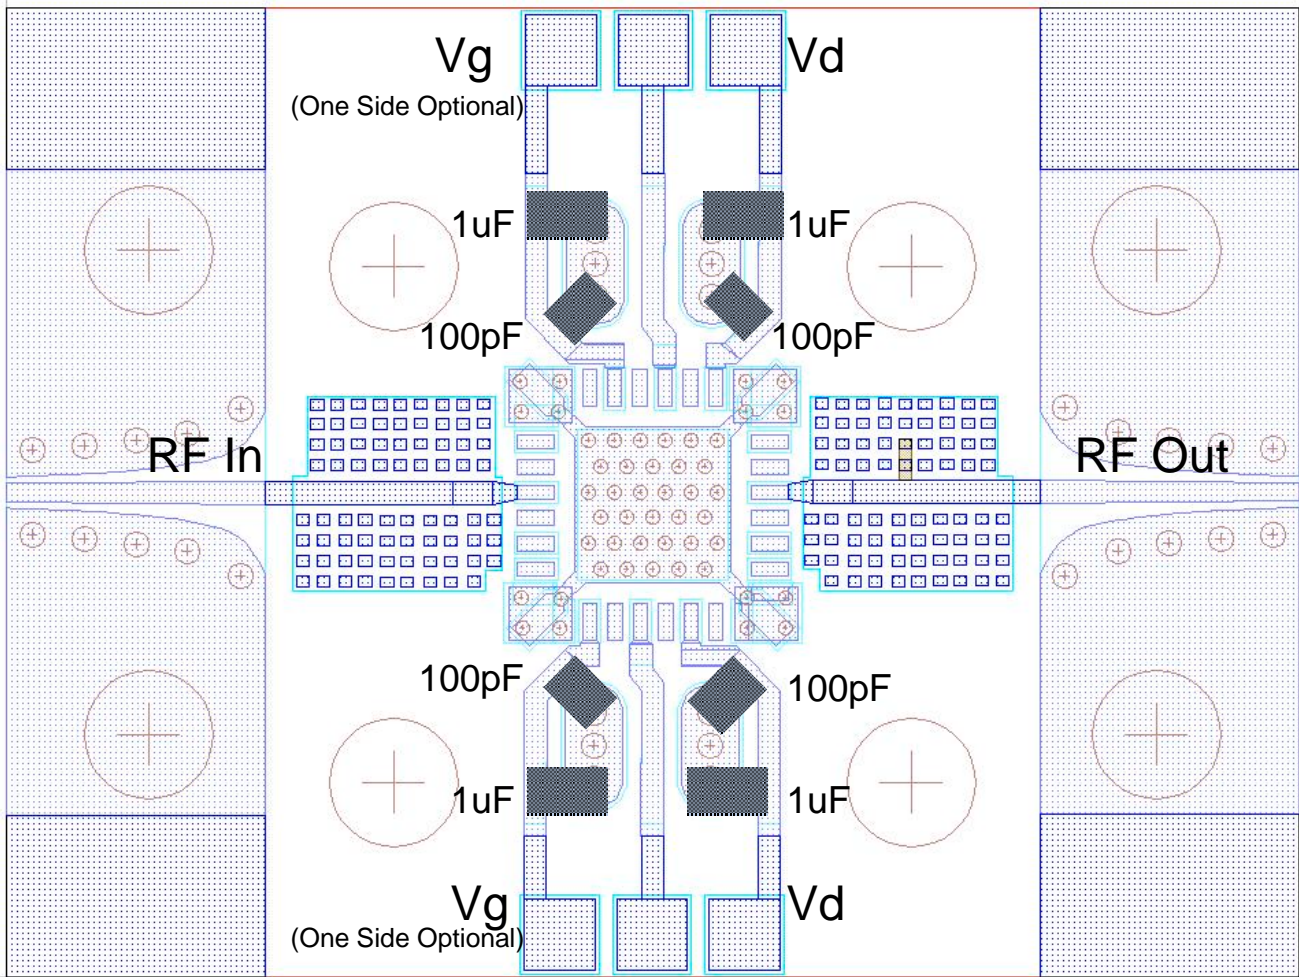

**Application Circuit**

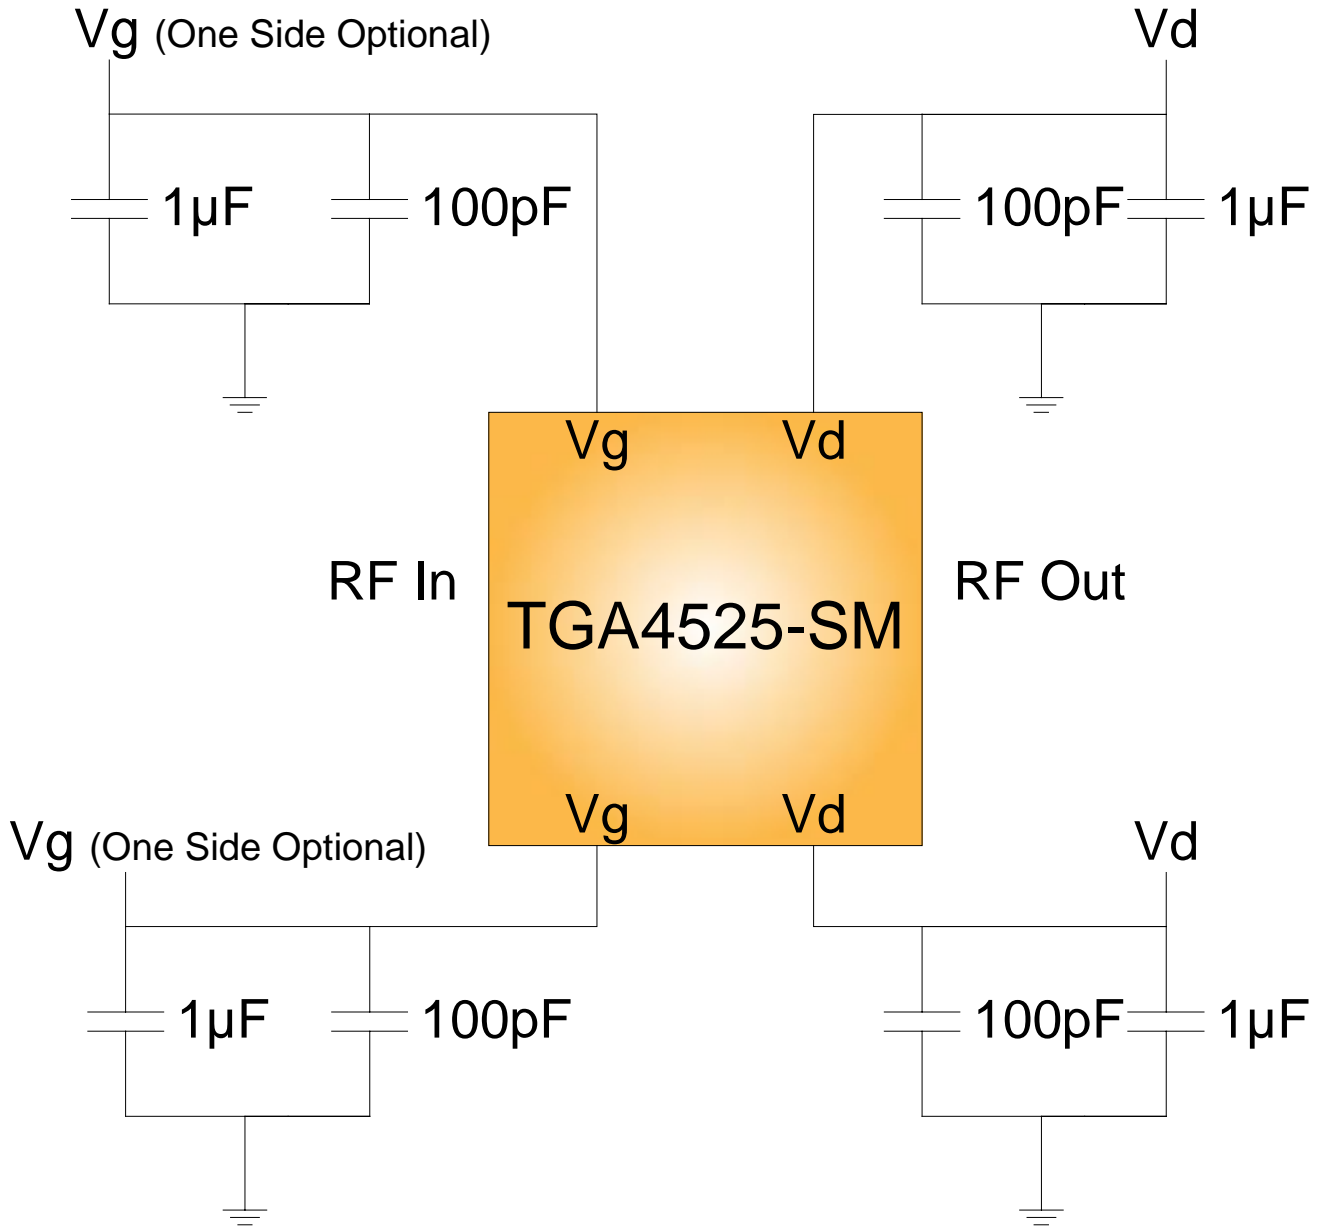

**Vd = 5 to 7V**

**Vg = -0.55V Typical to get Id = 760mA**

## Recommended Surface Mount Package Assembly

Proper ESD precautions must be followed while handling packages.

Clean the board with acetone. Rinse with alcohol. Allow the circuit to fully dry.

TriQuint recommends using a conductive solder paste for attachment. Follow solder paste and reflow oven vendors' recommendations when developing a solder reflow profile. Typical solder reflow profiles are listed in the table below.

Hand soldering is not recommended. Solder paste can be applied using a stencil printer or dot placement. The volume of solder paste depends on PCB and component layout and should be well controlled to ensure consistent mechanical and electrical performance.

Clean the assembly with alcohol.

## Typical Solder Reflow Profiles

Reflow Profile	SnPb	Pb Free
Ramp-up Rate	3 °C/sec	3 °C/sec
Activation Time and Temperature	60 – 120 sec @ 140 – 160 °C	60 – 180 sec @ 150 – 200 °C
Time above Melting Point	60 – 150 sec	60 – 150 sec
Max Peak Temperature	240 °C	260 °C
Time within 5 °C of Peak Temperature	10 – 20 sec	10 – 20 sec
Ramp-down Rate	4 – 6 °C/sec	4 – 6 °C/sec

## Ordering Information

Part	Package Style
TGA4525-SM	QFN 5x5 Surface Mount