



## CERAMIC FILTER FOR COMMUNICATION

## 通信设备用陶瓷滤波器

## LTM450/455□W

## DIMENSIONS(Unit:mm) 外形尺寸

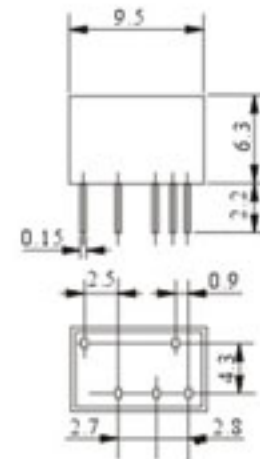

1: Input      1: 输入  
2: Output    2: 输出  
3,4,5: Ground    3,4,5: 接地

## PRINCIPAL PARAMETERS 主要参数

Model 型号	6dB Band Width 6分贝带宽 (KHz) min	Selectivity 选择性		Stop Band Att 450/455±100KHz 阻带衰减 (dB) min	Insertion Loss 插入损耗 (dB) max	Input/Output Impedance 输入/输出阻抗 (KΩ)
		Att Band Width 衰减带宽 (KHz) max	Att Specified 保证衰减量 (dB) min			
LTM450/455BW	±15	±30	50	40	4	1.5
LTM450/455CW	±12.5	±24				
LTM450/455DW	±10	±20				
LTM450/455EW	±7.5	±15				
LTM450/455FW	±6	±12.5				
LTM450/455GW	±4.5	±10		6	2	
LTM450/455HW	±3	±9				
LTM450/455IW	±2	±7.5				
LTM450/455HTW	±3	±9				
LTM450/455ITW	±2	±7.5				

## TEST CIRCUIT 测量线路

