


VSC7388



SparX-G8™ – 8-port Integrated Gigabit Ethernet Switch SoC with Copper PHYs



8-PORT UNMANAGED SMB SWITCH:

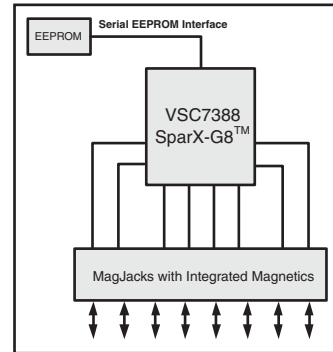

FEATURES:	BENEFITS:
▶ 8 Gigabit Ethernet Ports with Nonblocking Wire-speed Performance	▶ Ensures Maximum Data Throughput in Highly Loaded Networks
▶ 8 Tri-speed (10/100/1000 Mbps) Copper Transceivers (IEEE 802.3ab™ Compliant) with 2 Optional Multiplexed Tri-speed (RGMII/GMII) Interfaces	▶ Reduces the Need for any PHY Components Thereby Significantly Reducing Overall Systems Cost
▶ 144 KB On-chip Frame Buffer	▶ Eliminates the Need for External Buffer Memory While Maintaining High Peak Load Performance
▶ Selection Between On-chip 8051 CPU or Off-chip 8-bit CPU for Fully Managed Applications	▶ Enables Advanced Switch Management Using Run-time Protocols, in Addition to Low Cost Unmanaged and Web Managed Operation
▶ DSCP Remarking for Both IPv4 and IPv6 Frames	▶ Enables LAN Edge Products to Generate Standard Priority which can be used in the Core Network
▶ Jumbo Frame Support in all Three Speeds (10/100/1000 Mbps)	▶ Connects Effortlessly to Networks, Hosts, and Controllers that Utilize up to 9.6K Sized Jumbo Frames
▶ Programmable Classifier for QoS, Including IEEE Std 802.1p™ and DSCP for IPv4 and IPv6, with 4 Classes of Service	▶ Optimizes Network Performance to Support any Digital Stream, from Internet Browsing to VoIP and Video
▶ 8K MAC Addresses and 4K VLANs (IEEE Std 802.1Q™)	▶ Stores a Large Amount of Stations at Wire Speed in the On-chip MAC Table, Ensuring Optimal Network Performance
▶ Flexible Link Aggregation Compliant to IEEE Std 802.3ad™	▶ Provides High Bandwidth Uplinking Abilities
▶ Full Duplex Flow Control (IEEE Std 802.3X™) and Half Duplex Back Pressure, Symmetric and Asymmetric	▶ Ensures Loss-less Data Transmission while Supporting Existing Legacy Ethernet Equipment
▶ Multicast and Broadcast Storm Control as well as Flooding Control	▶ Eliminates Unwanted Flooding of Ports and Thereby Increases Overall Network Performance
▶ Multiple Protocol Support: IEEE Std 802.1D™, IEEE Std 802.1w™, IEEE Std 802.1s™ and IEEE Std 802.1X™	▶ Supports Complex Network Topologies with Fast Failure Recovery and Access Control
▶ Integrated Oscillator Circuit	▶ Simplifies Design and Reduces Overall System Cost
▶ Vitesse VeriPHY™ Cable Diagnostics and SimpliPHY™ Magnetics Technology	▶ Enables Real Time Cable Diagnostics and Low Cost Magnetics with Only 4 or 8 Cores per port

APPLICATIONS:

- ▶ 8-port Unmanaged Gigabit Ethernet SMB/SOHO Switch
- ▶ 8-port Web Managed Gigabit Ethernet SMB/SOHO Switch

SparX-G8™ – 8-port Integrated Gigabit Ethernet Switch SoC with Copper PHYs

GENERAL DESCRIPTION:



VSC7388 SparX-G8™ is the most highly integrated, single-chip Gigabit Ethernet switch with 8 Integrated GbE Copper PHY ports. As part of Vitesse's SparX™ Family of switches, SparX-G8 delivers high performance with easy migration paths, and comprehensive System Solutions that enable ultra-short time-to-market and market leading system cost.

A Vitesse Switch Family Member

SparX-G8 is a part of the Vitesse SparX™ Family Of Unmanaged or Web-managed Switches and takes the family into a new generation of integration. With its 8 tri-speed Gigabit Ethernet copper ports, it is specifically targeted at SMB and SOHO unmanaged applications, and with its on-chip 8051 and Parallel CPU interface it enables Web-Managed and managed switch applications.

Being a member of the switch family provides a number of unique advantages when designing with the chip, including nearly 100% software compatibility between members. Thus, software written for SparX-G8 can easily be used with other switch configurations in the family, and vice-versa.

Additionally, building a product family is easy when designing with Vitesse switches. Upgrading designs to higher port counts, or migrating to other configurations or future technology is achievable with minimum effort and time.

The Vitesse SparX™ Family Of Switches

SparX-G8, as part of the Vitesse SparX Family Of Switches, shares the unique traits of the family.

The highly integrated switches require no external memory, and the integration of copper PHY as well as internal oscillator circuit simplifies PCB layout to reduce time and cost. Further trimming down system cost is the industry's lowest power, fully integrated, Switch-plus-Copper PHY technology.

The switches provide for high performance designs with their non-blocking, wire-speed performance, which includes wire-speed MAC address learning.

Designing both unmanaged and web-managed solutions is straightforward. The chips offer both internal 8051 and serial and parallel CPU interfaces, and support a host of management protocols such as GxRP, SNMP, and three flavors of Spanning Tree: Standard STP, Multiple STP, and Rapid STP.

Controlling networks operated by the Vitesse switches is simple; advanced classification with IPv4 and IPv6 support, along with port DSCP remarking and 802.1X authentication support, provide flexible QoS operation. This is backed up by Layer 2-4 link aggregation and VLAN support, enabling managed switches to be deployed.

With its unique low power dissipation the VSC7388 enables fan less operation and thereby provides for higher system reliability and lower noise, both to the benefit of the user.


Designing with Vitesse SparX Family Of Switches means designing with the complete Vitesse Solution:

Vitesse provides a comprehensive, web managed switch software system for the on-chip 8051 CPU. This is in addition to the unmanaged and smart managed software systems for 8051, which are also included. For homegrown software development, Vitesse's full platform and OS independent switch API are supplied.

Accompanying the software systems are the Vitesse Switch Reference Systems. These are production-ready hardware designs that also serve as evaluation platforms.

The Vitesse Solution is supplied with a comprehensive collateral package, including software source code, full documentation, and an in-depth qualification report for easy pre-evaluation.

BLOCK DIAGRAM:

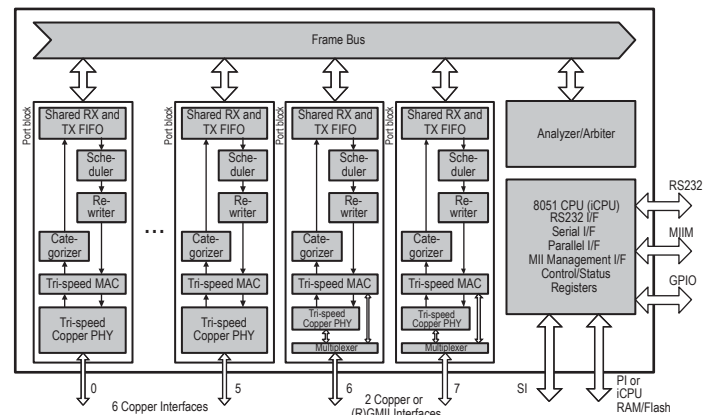

SPECIFICATIONS:

- ▶ 25 MHz LVTTTL Reference Clock
- ▶ 3.3 V Interface Power Supply
- ▶ 1.2 V Core Power Supply
- ▶ BGA Package

For more information on Vitesse Products visit the Vitesse web site at www.vitesse.com or contact Vitesse Sales at (800) VITESSE or sales@vitesse.com

Vitesse, ASIC-Friendly, FibreTimer, TimeStream and Snoop Loop are trademarks of Vitesse Semiconductor Corporation. All other trademarks or registered trademarks mentioned herein are the property of their respective holders. Vitesse Semiconductor Corporation ("Vitesse") retains the right to make changes to its products or specifications to improve performance, reliability or manufacturability. All information in this document, including descriptions of features, functions, performance, technical specifications and availability, is subject to change without notice at any time.

VITESSE

741 Calle Plano
 Camarillo, CA 93012, USA
 Tel: +1 805.388.3700
 Fax: +1 805.987.5896
www.vitesse.com