


Part Number: SL03 10001

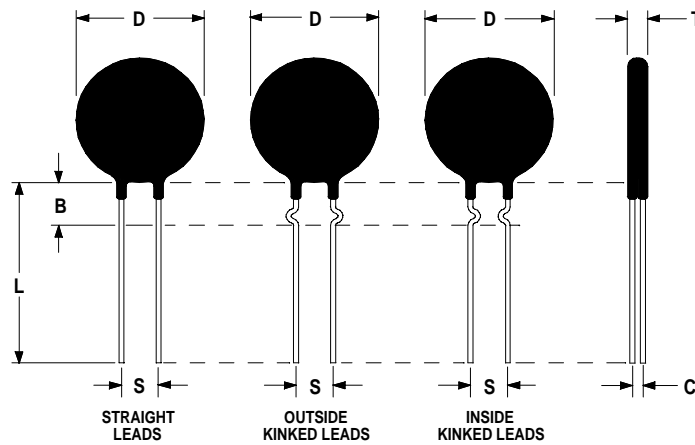

Electrical Specifications:

Resistance @ 25°C	10.0 Ω \pm 20%
Resistance @ 0°C/ Resistance @ 50°C	4.95 \pm 1%
Resistance @ 25°C/ Resistance @ 125°C	12.8 \pm 2%
Beta	2700 \pm 2%
Max Steady State Current Up to 65°C	1.0 A
Max Recommended Energy Rating (Joules)	2.0 J
Max Hot Resistance @ 1.0A	0.80 Ω
Max Hot Resistance @ 0.50 A	2.0 Ω
Max Capacitance @ 120VAC	100 μ F

Mechanical Specifications:

D	3.0 mm Max
T	3.0 mm Max
Lead Diameter	0.5 mm Nom
S	2.5 mm Nom
L	38.0 mm Min
Straight Leads	Standard
C	2.0 mm Nom

Current (mA)	Resistance (Ω)
100	8.0
200	5.0
300	3.3
400	2.5
500	2.0
600	1.7
700	1.3
800	1.0
900	0.9
1000	0.8

Revision Date: September 11, 2006

Ametherm, Inc. 3111 N. Deer Run Road #4 Carson City, NV 89701
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

www.ametherm.com