

MULTI LAMPS LED BULB

Data Sheet

Description:

These multi lamps LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The 3mm round shaped radiation pattern (45°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED
materials are used in this
Bulb.
Every lamp is made with an
advanced optical grade
epoxy offering superior
high shock and high
temperature resistance in
outdoor applications.

Feature:

- \cdot Wide view angle
- High luminous output
- \cdot Seven kind color
- Solid-state Vibration resistant
- \cdot Saving power
- Long life

Option:

- 6V to 240V AC or DC
- · Other industry standard
- base

A-BRIGHT


A-BRIGHT INDUSTRIAL CO., LTD.



Part No.: <u>AB-33G1-12V-B</u>

Multi Lamps LED Bulb

PACKAGE DIMENSIONS:

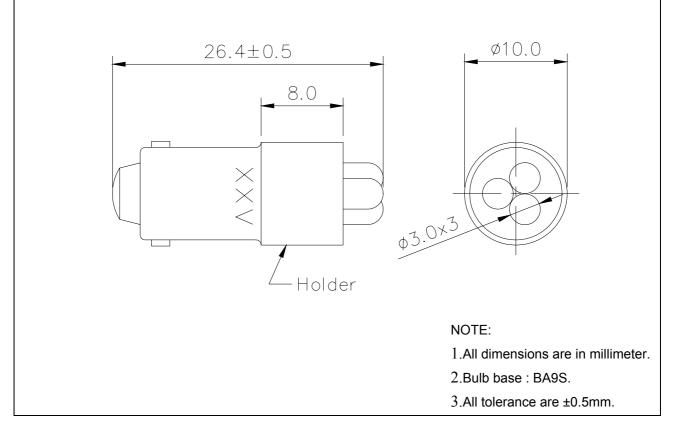



Part No.: <u>AB-33G1-12V-B</u>

Multi Lamps LED Bulb

FEATURE:

- SUPER LUMINOSITY GREEN LED (InGaN).
- WATER CLEAR PACKAGE.
- 3mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- BASE MODEL BA9s.
- ELECTRIC AC/DC BI-POLAR.

ABSOLUTE MAXIMUM RATING: Ta = 25 $^{\circ}$ C

- PEAK OPERATE VOLTAGE...... 14 V
- OPERATING TEMPERATURE...... $-25 \text{ TO } + 85^\circ \!\! \mathbb{C}$
- STORAGE TEMPERATURE...... -35 TO +100℃

(LUMINANCE REDUCES to 50%)

ABSOLUTE OPTICAL CHARACTERISTIC Ta= 25°C

PARAMETER		SYMBOL	MIN	ТҮР	MAX	UNIT
Operate Voltage		V		12	14	v
Luminous Intensity	I F= 20 mA	Ιv	12	17		cd
Dominant Wavelength	I F= 20 mA	λd		525		nm
Spectrum Radiation Bandwidth	I F= 20 mA	Δλ		30		nm
Forward Current	VIN=12 V DC	IF		20		mA
Viewing Angle		201/2		45		deg