

MULTI LAMPS LED BULB

Data Sheet

Description:

These multi lamps LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The 3mm round shaped radiation pattern (45°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb.

Every lamp is made with a advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

Feature:

- · Wide view angle
- · High luminous output
- · Seven kind color
- Every lamp is made with an · Solid-state Vibration advanced optical grade resistant
 - · Saving power
 - · Long life

Option:

- · 6V to 240V AC or DC
- · Other industry standard base

A-BRIGHT

A-BRIGHT INDUSTRIAL CO.,LTD.


A-BRIGHT 10/30/2006

1



Part No.: AB-33TR-110V-B Multi Lamps LED Bulb

PACKAGE DIMENSIONS:

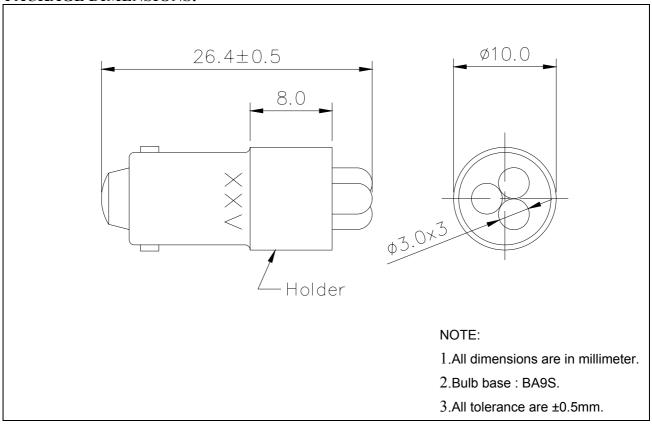



Part No.: <u>AB-33TR-110V-B</u>

Multi Lamps LED Bulb

FEATURE:

- SUPER LUMINOSITY RED LED (AlGaInP).
- WATER CLEAR PACKAGE.
- 3mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- BASE MODEL BA9s.
- ELECTRIC AC/DC BI-POLAR.

ABSOLUTE MAXIMUM RATING: Ta = 25 $^{\circ}$ C

PEAK OPERATE VOLTAGE...... 130 V

ullet OPERATING TEMPERATURE...... $-25\ {
m TO}\ +85{
m ^{\circ}C}$

• LED BULB LIFE...... 50000 HOURS

(LUMINANCE REDUCES to 50%)

ABSOLUTE OPTICAL CHARACTERISTIC Ta= 25°C

PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT
Operate Voltage		V		110	130	V
Luminous Intensity	I F= 5.0 mA	Ιv	2500	3500		mcd
Dominant Wavelength	I F= 5.0 mA	λd		630		nm
Spectrum Radiation Bandwidth	I F= 5.0 mA	Δλ		30		nm
Forward Current	V IN=110 V DC	I F		5.0		mA
Viewing Angle		201/2		45		deg