


Type: CLQ72B

◆ **Product Description**


- 7.0×7.0mm Max.(L×W), 2.5mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.




◆ **Feature**

- Magnetically shielded construction.
- Max. Operating frequency 1MHz.
Max Operating Power 780mW (1MHz),380mW(500kHz),220mW(300kHz).
- Ideally used in LCD TV, Digital still camera, PDA.
- RoHS Compliance.

◆ **Dimensions (mm)**

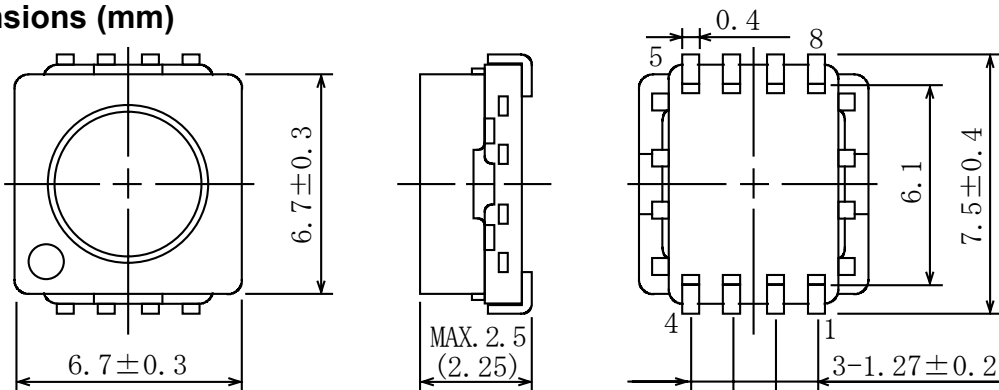


◆ **Schematics (Bottom)**



“ S ” is winding start.

◆ **Land Pattern (mm)**

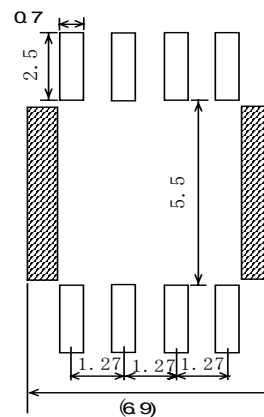

◆ **Specification**

Sample No.	Inductance 1kHz/1V	D.C.R. (4-1) at20°C	D.C.R.(3-2) at20°C
6339 – T111	750μH ± 30%	494m Ω Max.	962m Ω Max.