

Type: TFB-3LG


Product Description

- 26.7 × 9.7mm Max.(L × W), 12.5mm Max. Height.
- Operating frequency:10~200kHz
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements

Feature


- Variable shielded type with three individual coils combined.
- Two capacitors can be internally mounted in one section.
- Ideally used in VCR, Video Cameras as Audio LC filters(LPF, BPF, Delay Line and Equalizers).
- RoHS Compliance.

Dimensions (mm)

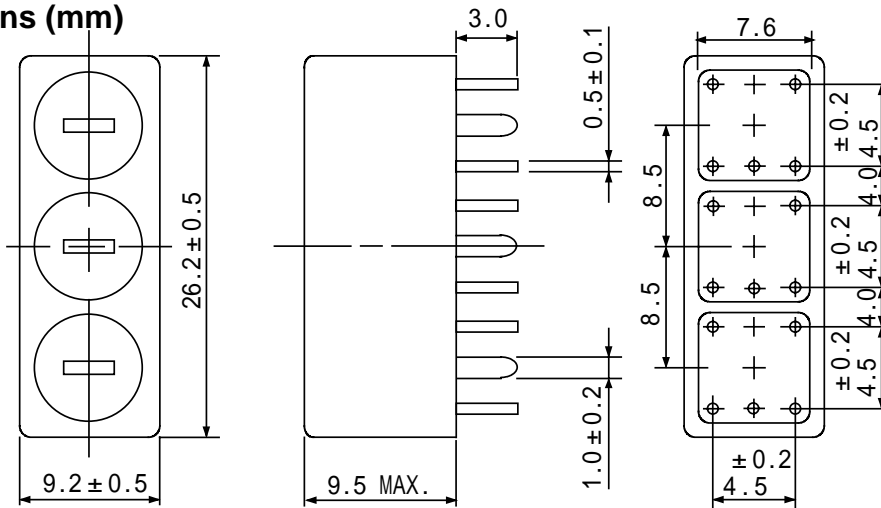

- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.

Testing circuit

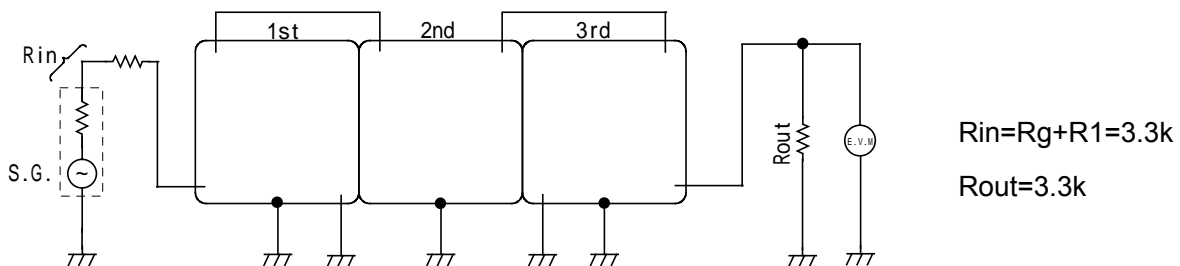

Type: TFB-3LG

Specification(Part No: 4511-004)

Item	Specification
Input impedance (Rin)	3.3kΩ
Output impedance (Rout)	3.3kΩ
Center frequency	57kHz
Band width (-3dB)	8.0 ⁺² -4 kHz Within
Attenuation 38kHz	35dB Min.
Insertion loss 57kHz	3.0dB Max.

Frequency Response (Attenuation 0dB at 57KHz)

