

Part No. **AL-513SRGBC**


Diff No.

5 mm

Round

Type : LED Lamps

Package Dimension :

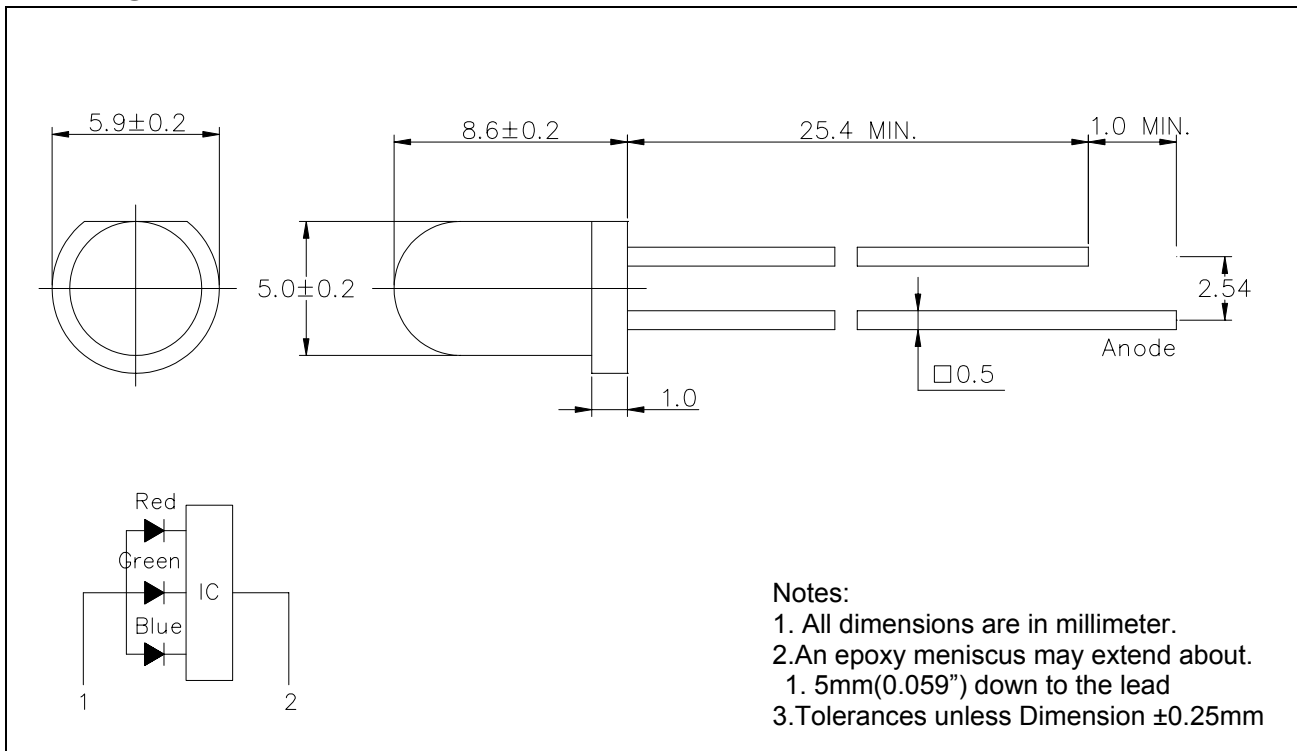

■ Features :

- Choice of various viewing angles.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different colors, intensity, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

Part No. **AL-513SRGBC**

Diff No.

5 mm

Round

Type : LED Lamps

PART NO.	Chip		Lens Color
	Material	Emitted Color	
AL-513SRGBC	AlGaInP	U/B Red	Water Clear
	InGaN	U/B Green	
	InGaN	Blue	

■ Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating	Unit
Reverse Current	V _R	100	μA
Peak Current	I _F (Peak)	100	mA
Operating Temperature	T _{opr}	-30 to +80	°C
Storage Temperature	T _{stg}	-30 to +80	°C
Soldering Temperature	T _{sol}	260 ± 5	°C
Derating Linear 25°C		0.4	mA/°C

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition	
Luminous Intensity	I _v	R	/	1000	/	mcd	I _F =10mA
		G	/	1800	/		
		B	/	550	/		
Viewing Angle	2θ1/2	R	/	25	/	deg	I _F =20mA
		G	/	21	/		
		B	/	21	/		
Peak Wavelength	λ _p	R	/	630	/	nm	I _F =20mA
		G	/	535	/		
		B	/	475	/		
Dominant Wavelength	λ _d	R	/	625	/	nm	I _F =20mA
		G	/	520	/		
		B	/	470	/		
Forward Voltage	V _F	R	/	2.1	2.6	V	I _F =20mA
		G	/	3.5	4.0		
		B	/	3.5	4.0		

Part No. **AL-513SRGBC**

Diff No.

5 mm

Round

Type : LED Lamps

■ Reliability test items and conditions :

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5°C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ┆ 5min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ┆ 10set L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C I _F =20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 HRS	76 PCS	0/1

Part No. **AL-513SRGBC**



Diff No.

5 mm

Round

Type : LED Lamps

◆ TYPICAL ELECTRICAL-OPTICAL CHARACTERISTICS CURVES

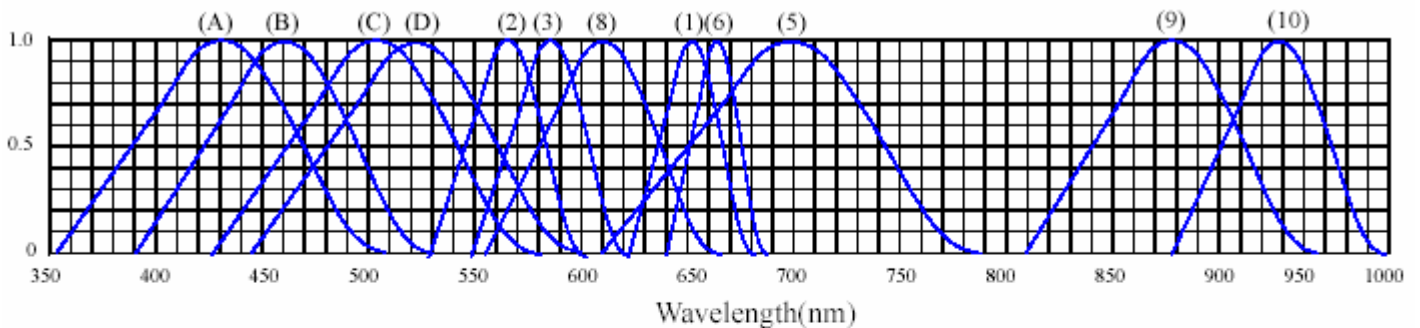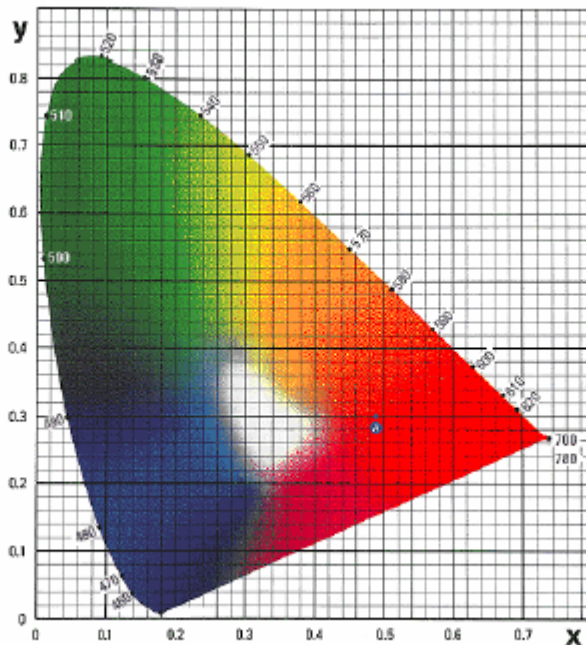

RELATIVE INTENSITY VS. WAVELENGTH(λ_p)

- | | |
|---|----------------------------------|
| (1) GaAsP/GaAs 655nm/Red | (9)- GaAlAs 880nm |
| (2) GaP 568nm/ Yellow Green | (10)-GaAs/GaAs&GaAlAs/GaAs 940nm |
| (3) GaAsP/GaP 585nm/Yellow | (A)- GaN 430nm/Blue |
| (4) GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B)- InGaN 470nm/Blue |
| (5) GaP 700nm/Bright Red | (C)- InGaN 502nm/Ultra Green |
| (6) GaAlAs/GaAs 660nm/Super Red | (D)- InGaN 523nm/Ultra Green |
| (8) GaAsP/GaP 610nm/Super Red | |

Part No. **AL-513SRGBC**

Diff No.


5 mm

Round


Type : LED Lamps

◆ CHARACTERISTICS DIAGRAMS



FORWARD CURRENT VS. FORWARD VOLTAGE

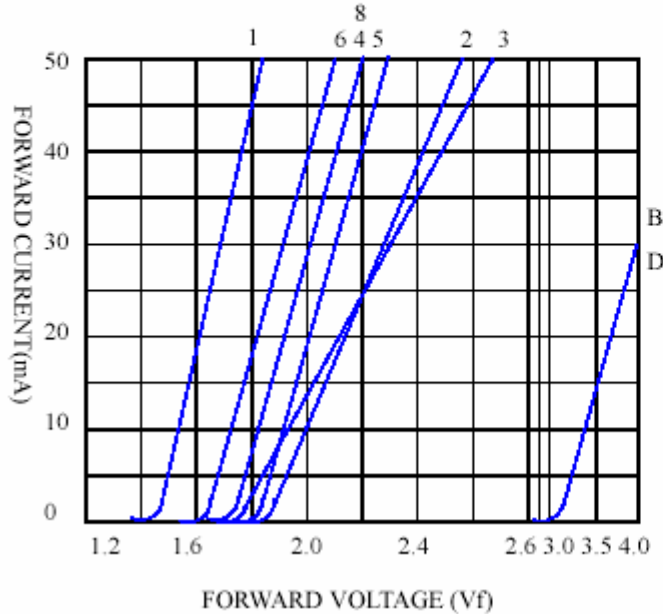

RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

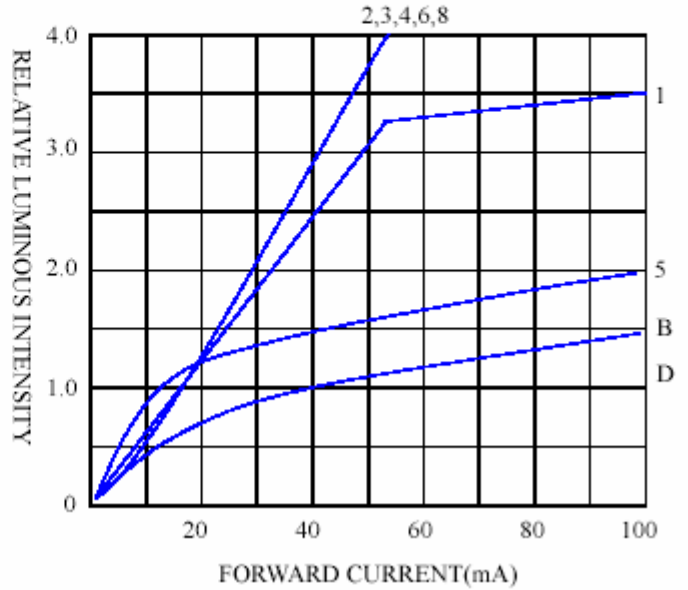

FORWARD CURRENT VS. AMBIENT TEMPERATURE

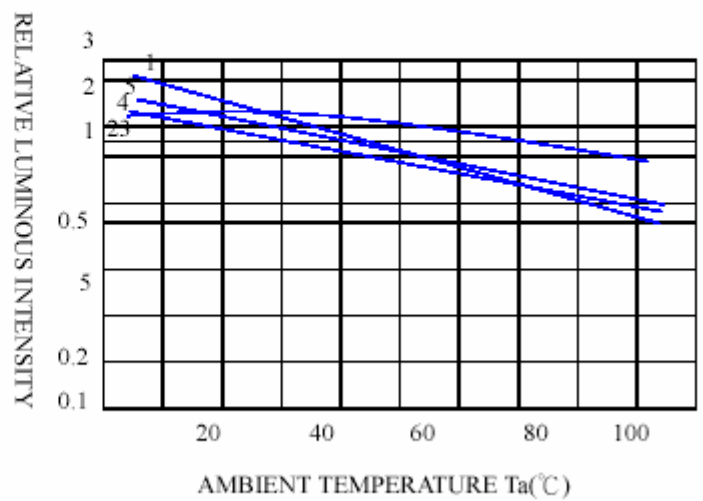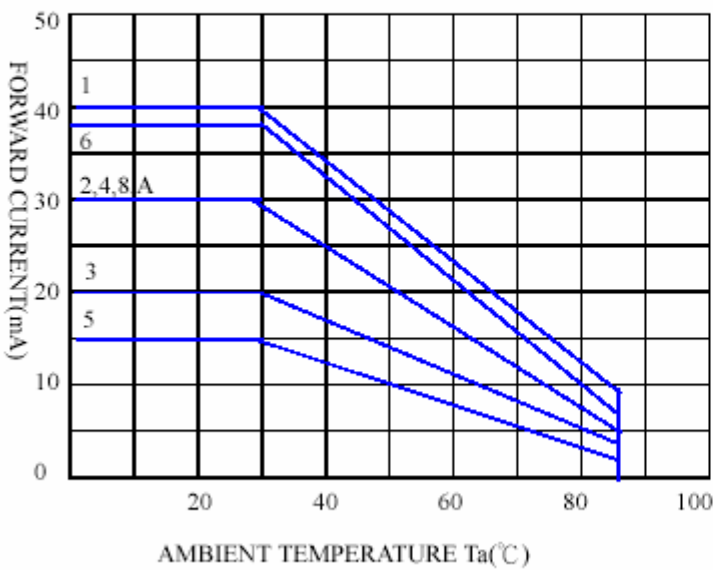

Part No. **AL-513SRGBC**

Diff No.

5 mm

Round

Type : LED Lamps

SEC(K1)				SEC(K2)				SEC(K3)				SEC(K4)			
Single Light Flash				Dual Light Flash				Continue Light				No Light			
L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L4
○	X	X	X	○	○	○	X	○	X	X	X	○	○	○	○
X	○	○	○	X	○	○	○	○	○	○	X	○	○	○	X
X	X	X	○	○	X	X	○	○	○	○	○	X	X	X	X
								X	X	X	X	X	X	X	X

TESTING CONDITION: 4.5VDC TOLERANCE: ±20%

SEC 1 ===0.79 SEC. SEC 2 ===0.81 SEC.

SEC 3 ===1.07 SEC. SEC 4 ===1.07 SEC.

SEC 5 ===0.50 SEC. SEC 6 ===1.80 SEC.

SEC. 7===2.90 SEC.

SEC(K5)				SEC.(K6)				SEC(K7)				SEC(K8)			
All Light Flash				Full Color				Full Color Dimmer				Sec 1 + Sec 6 + Sec 7			
L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L4				
○	○	○	○	○	X	X	X	◇	X	X	X				
X	X	X	X	X	○	○	X	X	◇	◇	X				
				X	X	X	○	X	X	X	◇	SEC8(K8)			
				○	○	○	X	◇	◇	◇	X	SEC 1 ~ SEC7			
				○	○	○	○	X	◇	◇	◇				
				○	X	X	○	◇	X	X	◇				
				○	○	○	○	◇	◇	◇	◇				