

CLT8 Capacitance rope sensor for liquid application

825B028B

Rope electrode capacitance sensor for pharma/chemical ON-OFF level control in liquids. IP65, installation on the top of the tank.

ORDERING INFORMATION (Example) CLT8 **B 2 2 B 7 3 C 8 2 A**

Version
Compact

Electronic preamplifier
TC22, 2 push buttons calibration, 24Vdc








IP65 Head connection enclosure
PC polycarbonate loaded










Process connection
Clamp 1 1/2" AISI 316

Rope electrode-type and insulation + counterweight
2,5mm PTFE insulated counterweight in AISI 316

L electrode length , price per meter (rope)
2,5mm PTFE insulated

L1 non sensitive part , material and price per each 10cm
Standard

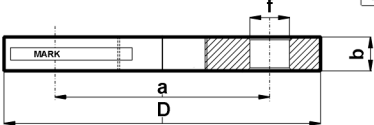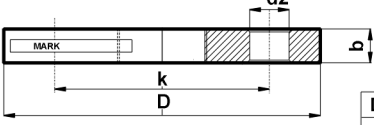VERSION Code: CLT8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>				INSERT PREAMPLIFIER Code: CLT8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
Electrode only  Without insert preamplifier	Compact  Electrode + Insert	Compact + carbon-steel Spacer-cooling-fins  Compact + AISI316 Spacer-cooling-fins	Separate version  DIN B aluminium electrode head 1.5 mt coaxable	0 0 Insert = none 2 2 Insert = TC22 2 3 Insert = TC23 2 4 Insert = TC24 2 5 Insert = TC25	 2 6 Insert = TC26 2 7 Insert = TC27 2 8 Insert = TC28 2 9 Insert = TC29 3 0 Insert = TC30 (EEx.ia)		
IP65 HEAD CONNECTION Code: CLT8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>				PC polycarbonated loaded PG13,5 		Diecast aluminium varnished  x PG13,5	

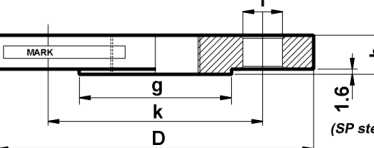PROCESS CONNECTION Code: CLT8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>																																																								
THREADED  0 2 G 1" AISI316 0 4 1" NPT AISI316	FLANGED UNI 6091-67 PN6 4 2 DN40 Carb.Steel <table border="1"> <thead> <tr> <th>DN</th> <th>D</th> <th>b</th> <th>a</th> <th>f</th> <th>Holes</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>130</td> <td>14</td> <td>100</td> <td>14</td> <td>4</td> </tr> <tr> <td>50</td> <td>140</td> <td>14</td> <td>110</td> <td>14</td> <td>4</td> </tr> <tr> <td>80</td> <td>190</td> <td>16</td> <td>150</td> <td>18</td> <td>4</td> </tr> <tr> <td>100</td> <td>210</td> <td>16</td> <td>170</td> <td>18</td> <td>4</td> </tr> </tbody> </table>  UNI 6093-67 PN16 5 0 DN40 AISI304 5 1 DN40 AISI316 <table border="1"> <thead> <tr> <th>DN</th> <th>D</th> <th>b</th> <th>a</th> <th>f</th> <th>Holes</th> </tr> </thead> <tbody> <tr> <td>40</td> <td>150</td> <td>16</td> <td>110</td> <td>18</td> <td>4</td> </tr> </tbody> </table>	DN	D	b	a	f	Holes	40	130	14	100	14	4	50	140	14	110	14	4	80	190	16	150	18	4	100	210	16	170	18	4	DN	D	b	a	f	Holes	40	150	16	110	18	4	SANITARY FITTING CLAMP "3A" CONFORM 7 0 DN25 (1") Carb. Steel 7 1 DN25 (1") AISI316L 7 2 DN38 (1 1/2") Carb.Steel 7 3 DN38 (1 1/2") AISI316L 7 4 DN51 (2") Carb. Steel 7 5 DN51 (2") AISI316L <table border="1"> <thead> <tr> <th>DN</th> <th>A</th> <th>E</th> </tr> </thead> <tbody> <tr> <td>25 (1")</td> <td>50.5</td> <td>49</td> </tr> <tr> <td>38 (1 1/2")</td> <td>50.5</td> <td>49</td> </tr> <tr> <td>51 (2")</td> <td>64</td> <td>49</td> </tr> </tbody> </table> 	DN	A	E	25 (1")	50.5	49	38 (1 1/2")	50.5	49	51 (2")	64	49
DN	D	b	a	f	Holes																																																			
40	130	14	100	14	4																																																			
50	140	14	110	14	4																																																			
80	190	16	150	18	4																																																			
100	210	16	170	18	4																																																			
DN	D	b	a	f	Holes																																																			
40	150	16	110	18	4																																																			
DN	A	E																																																						
25 (1")	50.5	49																																																						
38 (1 1/2")	50.5	49																																																						
51 (2")	64	49																																																						
THREADED  1 1 G 1 1/2" Carbon Steel 1 2 G 1 1/2" AISI316 1 8 G 1 1/2" PVC 1 9 G 1 1/2" PTFE	FLANGED DIN 2527 Form B PN16 5 2 DN50 AISI316 5 3 DN80 AISI316 5 4 DN100 AISI316  <table border="1"> <thead> <tr> <th>DN</th> <th>D</th> <th>b</th> <th>k</th> <th>d2</th> <th>Holes</th> </tr> </thead> <tbody> <tr> <td>50</td> <td>165</td> <td>18</td> <td>125</td> <td>18</td> <td>4</td> </tr> <tr> <td>80</td> <td>200</td> <td>18</td> <td>160</td> <td>18</td> <td>8</td> </tr> <tr> <td>100</td> <td>220</td> <td>18</td> <td>180</td> <td>18</td> <td>8</td> </tr> </tbody> </table>	DN	D	b	k	d2	Holes	50	165	18	125	18	4	80	200	18	160	18	8	100	220	18	180	18	8	ACCESSORIES extra -code SEAL RING PIPE FOR CLAMP  WING-NUT 																														
DN	D	b	k	d2	Holes																																																			
50	165	18	125	18	4																																																			
80	200	18	160	18	8																																																			
100	220	18	180	18	8																																																			
THREADED 1 1 G 1 1/2" Carbon Steel 1 2 G 1 1/2" AISI316 1 8 G 1 1/2" PVC 1 9 G 1 1/2" PTFE	RF ANSI B16.5 150 psi 6 0 2" AISI316 6 1 3" AISI316 6 2 4" AISI316  <table border="1"> <thead> <tr> <th>D</th> <th>b</th> <th>g</th> <th>k</th> <th>I</th> <th>Holes</th> </tr> </thead> <tbody> <tr> <td>2"</td> <td>152.4</td> <td>19</td> <td>92.1</td> <td>120.6</td> <td>19 4</td> </tr> <tr> <td>3"</td> <td>190.5</td> <td>23.8</td> <td>127</td> <td>152.4</td> <td>19 4</td> </tr> <tr> <td>4"</td> <td>228.6</td> <td>23.8</td> <td>157.2</td> <td>190.5</td> <td>19 8</td> </tr> </tbody> </table>	D	b	g	k	I	Holes	2"	152.4	19	92.1	120.6	19 4	3"	190.5	23.8	127	152.4	19 4	4"	228.6	23.8	157.2	190.5	19 8	DIN 11851 2 0 NW25 AISI304L 2 1 NW40 AISI304L 2 2 NW50 AISI304L  <table border="1"> <thead> <tr> <th>NW</th> <th>B</th> <th>C</th> <th>A</th> <th>E</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>21</td> <td>52-6</td> <td>44</td> <td>35</td> </tr> <tr> <td>40</td> <td>21</td> <td>65-6</td> <td>56</td> <td>35</td> </tr> <tr> <td>50</td> <td>22</td> <td>78-6</td> <td>68</td> <td>35</td> </tr> </tbody> </table>	NW	B	C	A	E	25	21	52-6	44	35	40	21	65-6	56	35	50	22	78-6	68	35										
D	b	g	k	I	Holes																																																			
2"	152.4	19	92.1	120.6	19 4																																																			
3"	190.5	23.8	127	152.4	19 4																																																			
4"	228.6	23.8	157.2	190.5	19 8																																																			
NW	B	C	A	E																																																				
25	21	52-6	44	35																																																				
40	21	65-6	56	35																																																				
50	22	78-6	68	35																																																				




LEKTRA

applied solutions for the application


CLT8

ROPE ELECTRODE TYPE AND INSULATION+COUNTERWEIGHT IN AISI 316
AND L ELECTRODE LENGTH price per meter (rope)

Code CLT8




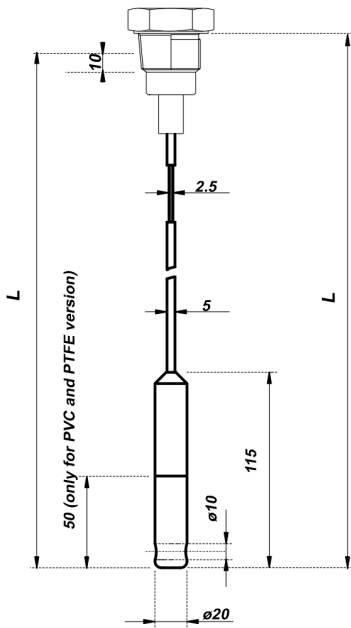


- B 8 1 2.5mm PTFE insulated counterweight in AISI 316
- C 8 2 2.5mm PTFE insulated counterweight in AISI 316
- L 8 1 2.5mm PVC insulated counterweight in PVC
- M 8 2 2.5mm PTFE insulated counterweight in PTFE
- H 8 5 6mm PVC insulated counterweight in AISI 316
- I 7 2 6mm PTFE insulated counterweight in AISI 316

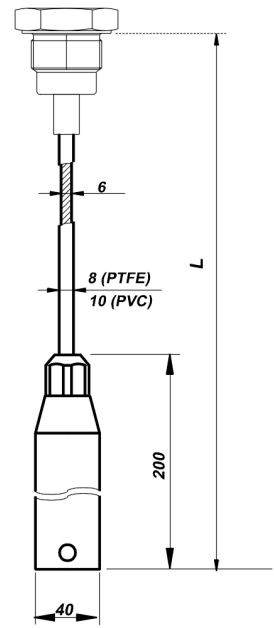


L1 non sensitive part (rod) material and price per each 10cm


Code CLT8



- A Standard
- B Carbon-steel L= _____
- C AISI 316 L= _____

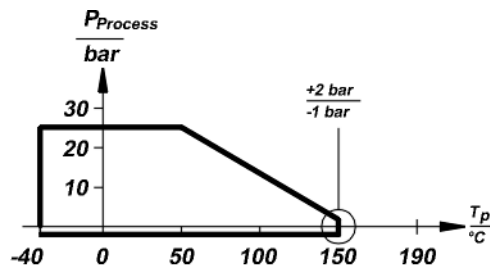

PTFE Insulated

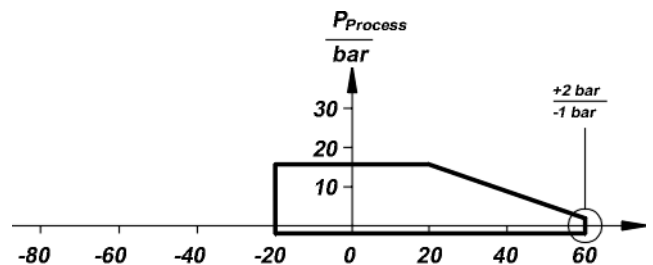

PVC Insulated