


### ● Features:

1. Chip material: GaAsP/GaP(Yellow) and GaP/GaP(Green)
2. Emitted color : Yellow and Green
3. Lens Appearance : White Diffused
4. Low power consumption.
5. High efficiency.
6. Versatile mounting on P.C. Board or panel.
7. Low current requirement.
8. 5mm diameter package.
9. This product don't contained restriction substance, compliance ROHS standard.

### ● Package dimensions:

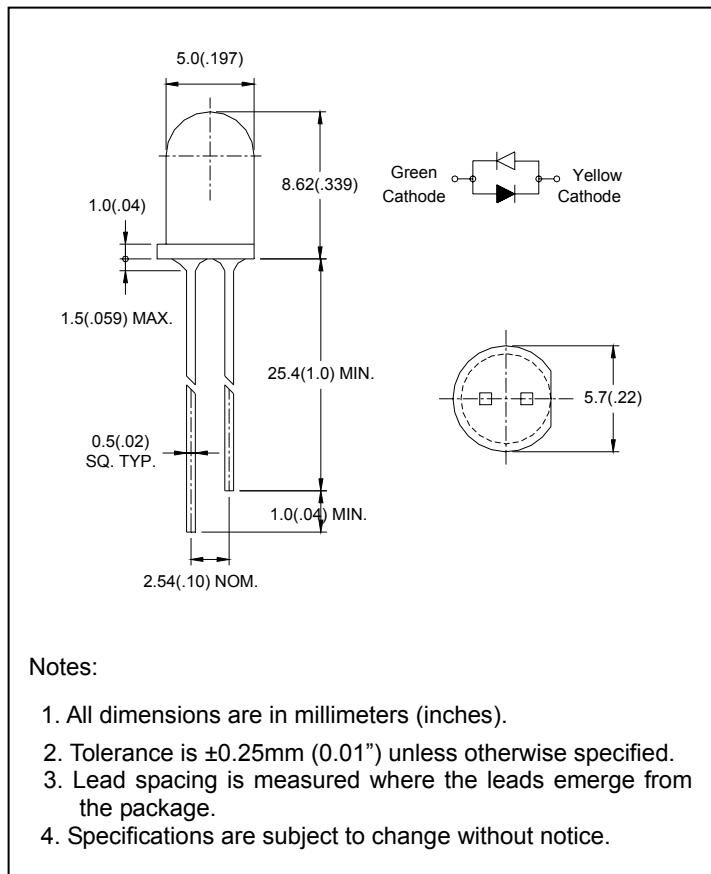

### ● Applications:

1. TV set
2. Monitor
3. Telephone
4. Computer
5. Circuit board

### ● Absolute Maximum Ratings( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Yellow	Green	Unit
Power Dissipation	Pd	80	80	mW
Forward Current	I <sub>F</sub>	30	30	mA
Peak Forward Current <sup>*1</sup>	I <sub>FP</sub>	150	150	mA
Operating Temperature	T <sub>opr</sub>	$-40^\circ\text{C} \sim 80^\circ\text{C}$		
Storage Temperature	T <sub>stg</sub>	$-40^\circ\text{C} \sim 85^\circ\text{C}$		
Soldering Temperature	T <sub>sol</sub>	260°C (for 5 seconds)		

<sup>\*1</sup>Condition for I<sub>FP</sub> is pulse of 1/10 duty and 0.1msec width.

## ● Electrical and optical characteristics( $T_a=25^\circ C$ )

Parameter	Symbol	Condition	Color	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$	$I_F=20mA$	Yellow Green	-	2.1 2.2	2.6 2.6	V
Luminous Intensity	$I_V$	$I_F=20mA$	Yellow Green	-	45. 50	-	mcd
Peak Wave Length	$\lambda_p$	$I_F=20mA$	Yellow Green	-	585 568	-	nm
Dominant Wave Length	$\lambda_d$	$I_F=20mA$	Yellow Green	582 560	-	595 576	nm
Spectral Line Half-width	$\Delta\lambda$	$I_F=20mA$	Yellow Green	-	35 30	-	nm
Viewing Angle	$2\theta_{1/2}$	$I_F=20mA$	Yellow Green	-	50	-	deg

## ● Typical Electro-Optical Characteristics Curves

