


# SOD-123 Plastic-Encapsulate Diode

## 1SS15A1 / 1SS15B1 / 1SS15C1 SCHOTTKY RECTIFIER

### Features

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- High Conductance

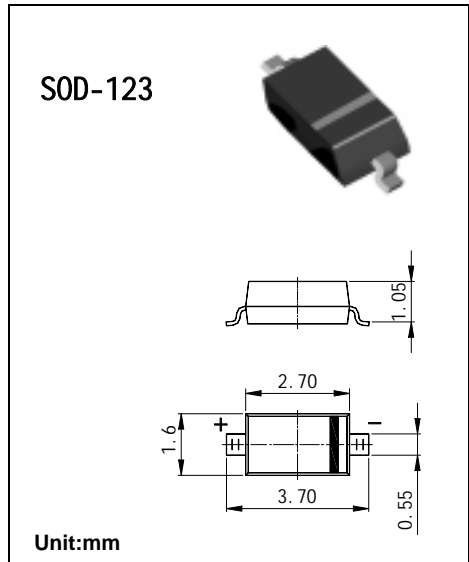

### Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	1SS15A1	1SS15B1	1SS15C1	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	20	30	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Output Current @ $T_A = 100^\circ\text{C}$	$I_o$	1.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	20			A
Power Dissipation (Note 1)	$P_d$	450			mW
Typical Thermal Resistance Junction to Ambient (Note 1)	$R_{\theta JA}$	244			$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_j, T_{STG}$	-65 to +125			$^\circ\text{C}$
Voltage Rate of Change	$dv/dt$	1000			$\text{V}/\mu\text{s}$

### Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbo	1SS15A1	1SS15B 1	1SS15C1	Unit	Test Conditions
Minimum Reverse Breakdown Voltage (Note 2)	$V_{(BR)R}$	20 — —	— <b>30</b> —	— — <b>40</b>	V	$I_R = 250\mu\text{A}$ $I_R = 130\mu\text{A}$ $I_R = 20\mu\text{A}$
Maximum Forward Voltage Drop (Note 2)	$V_{FM}$	0.300 0.385 <b>0.500</b>	<b>0.375</b> <b>0.430</b> <b>0.525</b>	— <b>0.480</b> <b>0.550</b>	V	$I_F = 0.1\text{A}, T_j = 25^\circ\text{C}$ $I_F = 0.5\text{A}, T_j = 25^\circ\text{C}$ $I_F = 1.0\text{A}, T_j = 25^\circ\text{C}$
Maximum Leakage Current (Note 2)	$I_{RM}$	<b>100</b>	<b>150</b>	<b>200</b>	$\mu\text{A}$	At rated DC blocking Voltage
Junction Capacitance	$C_j$	120			pF	$f = 1\text{MHz}, V_R = 0\text{V DC}$

- Notes:
1. Valid provided that leads are kept at ambient temperature.
  2. Pulse Test: Pulse width =  $300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

# Typical Characteristics

# 1SS15A1 / 1SS15B1 / 1SS15C1

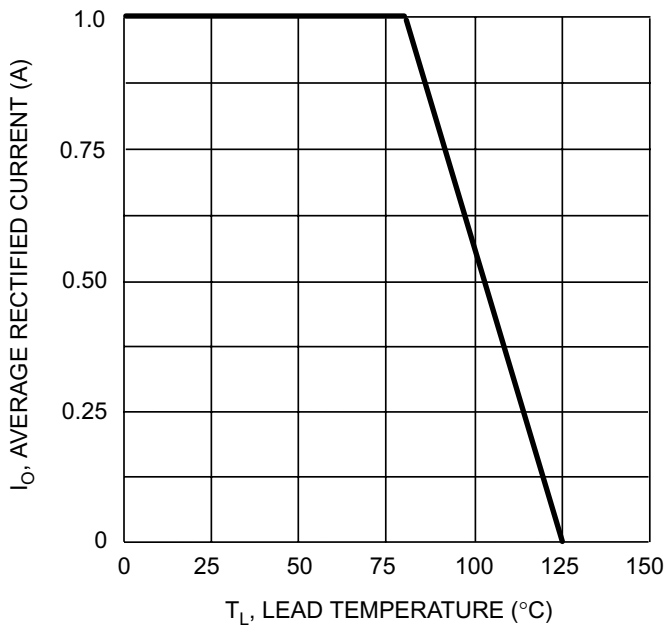


Fig. 1 Forward Current Derating Curve

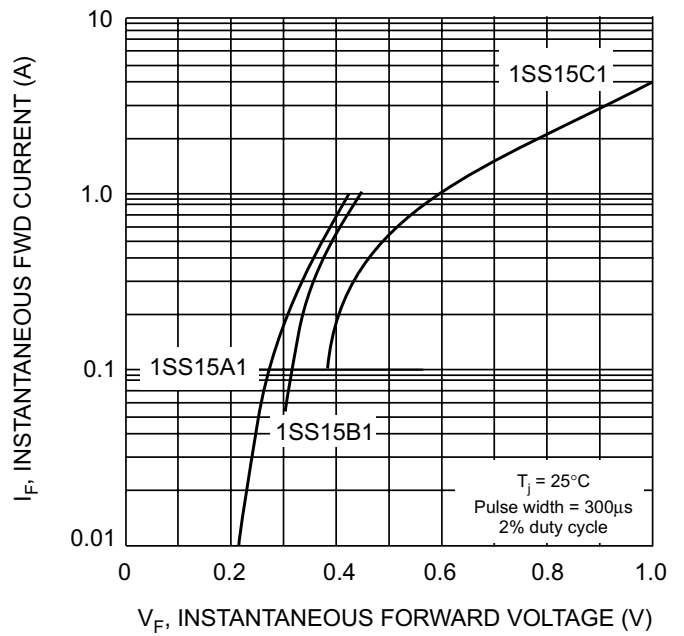


Fig. 2 Typical Forward Characteristics


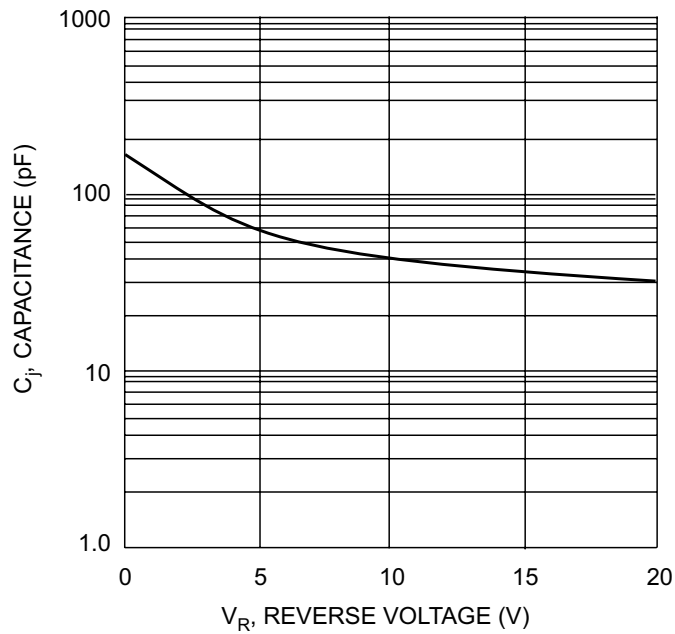


Fig. 3 Typ. Junction Capacitance vs Reverse Voltage

## SOD-123 PACKAGE OUTLINE DIMENSIONS

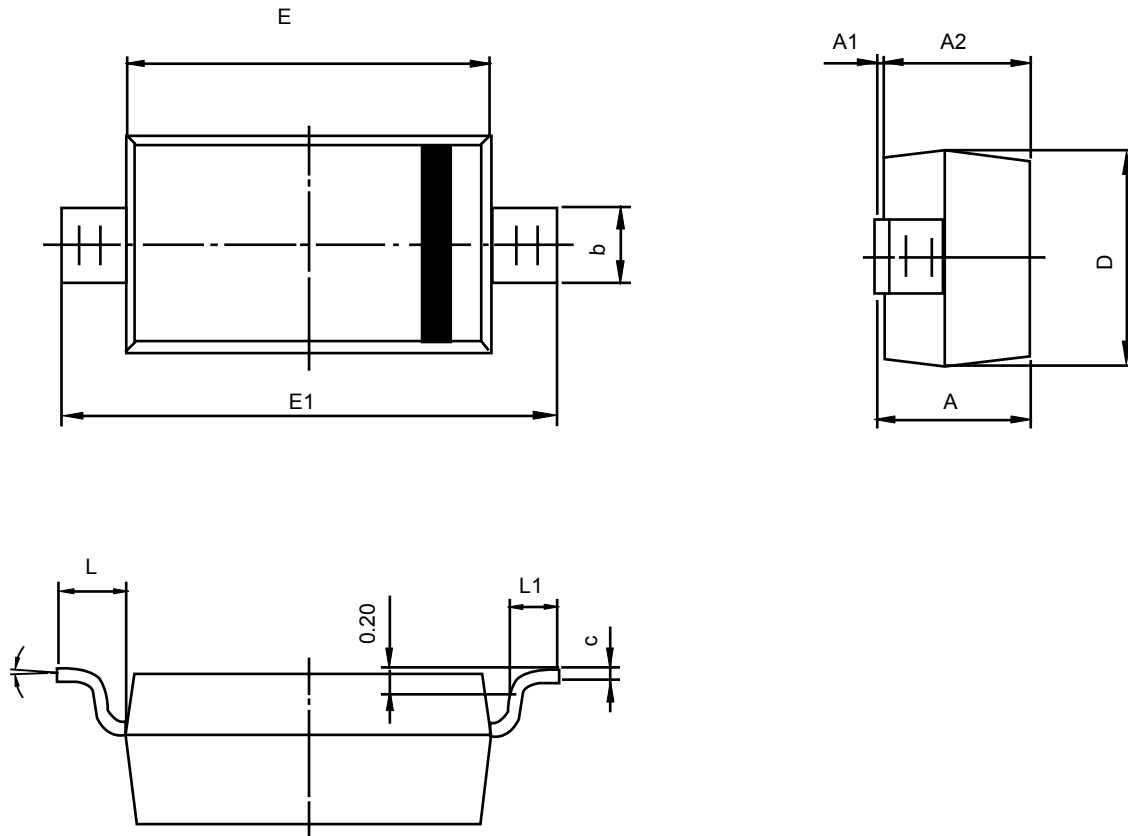

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
<b>A</b>	1.050	1.250	0.041	0.049
<b>A1</b>	0.000	0.100	0.000	0.004
<b>A2</b>	1.050	1.150	0.041	0.045
<b>b</b>	0.450	0.650	0.018	0.026
<b>c</b>	0.080	0.150	0.003	0.006
<b>D</b>	1.500	1.700	0.059	0.067
<b>E</b>	2.600	2.800	0.102	0.110
<b>E1</b>	3.550	3.850	0.140	0.152
<b>L</b>	0.500REF		0.020REF	
<b>L1</b>	0.250	0.450	0.010	0.018
$\theta$	0°	8°	0°	8°