

Features

- Glass Passivated Junction Protection for Superior Blocking Voltage and Stability
- 1200V Capability (CCT...P Type)
- Superior Commutating Performance at High Temperature

Applications

- Solid State Relays
- Discrete Semiconductors
- Light Dimming
- Heat Regulation
- Motor Controls

L Type - Electrical Ratings

Part Number	Description	$I_{T(AV)}^{①}$	V_{TM}	$I_T^{②}$	$V_{DRM} / V_{RRM}^{③}$ (V)	$I_{GT}^{②}$ (mA)	I_h (mA)	I_{TSM} (10ms)	Min. dv/dt (V/us)
CCT20L-04/08	Triac, Die, 12A	22	1.55	17	400-800	50	100	120	500
CCT22L-04/08	Triac, Die, 16A	16	1.55	22	400-800	50	100	160	500
CCT26L-04/08	Triac, Die, 25A	25	1.55	35	400-800	50	100	250	500
CCT30L-04/08	Triac, Die, 35A	40	1.55	60	400-800	50	100	380	500
CCT36L-04/08	Triac, Die, 45A	55	1.55	70	400-800	50	100	480	500

P Type - Electrical Ratings

Part Number	Description	$I_{T(AV)}^{①}$	V_{TM}	$I_T^{②}$	$V_{DRM} / V_{RRM}^{③}$ (V)	$I_{GT}^{②}$ (mA)	I_h (mA)	I_{TSM} (10ms)	Min. dv/dt (V/us)
CCT24P-08/12	Triac, Die, 16A	16	1.60	22	800-1200	50	100	160	500
CCT36P-08/12	Triac, Die, 40A	55	1.60	70	800-1200	50	100	480	500
CCT38P-08/12	Triac, Die, 50A	75	1.60	100	800-1200	50	100	600	500

① $T_j = 130^\circ\text{C}$, $T_c = 80^\circ\text{C}$. Rated values depend on assembly materials and conditions. Assemblies must be void-free and have sufficient heat sinking to achieve maximum ratings.

② 25°C

③ Part number suffix, 04=400V, 06=600V, 8=800V (L Type Only)

④ Part number suffix, 08=800V, 10=1000V, 12=1200V (P Type Only)

Part Numbering

Examples:

Series Voltage
CCT26L -06 = 600V
CCT24P -12 = 1200V

General Note:

Metallization - CR:Ni:Ag
Aluminum Metalization Available - Contact Factory

iso9001 CERTIFIED

USA
Sales & Tech Support (866) 258-5057
Email: sales@cynergy3.com
Cynergy3 Components
2320 Paseo de las Americas, Suite 104
San Diego, CA 92154


EUROPE - UK
Telephone +44 (0) 1202 897969
Fax +44 (0) 1202 891918
Email: sales@cynergy3.com
Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE

ASIA - Thailand
Telephone +66 (0)2 665 2517
Fax +66 (0)2 665 2588
Cynergy 3 Components, Asia
18/8 Fico Place 12th Floor
Soi Sukhumvit 21 (Asoke)
Klongtoey Nua, Wattana
Bangkok, Thailand 10110

www.cynergy3.com




Dimensions

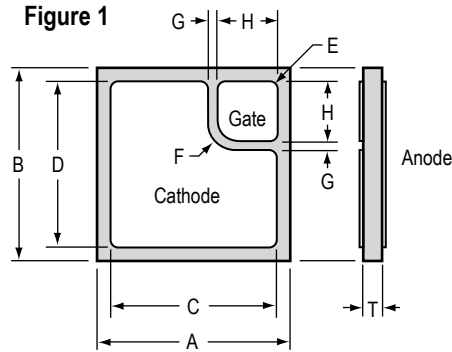

Dimensions in inches

Series Type	A	B	C	D	E	F	G	H	J	Thickness	
CCT20L	0.130	0.130	0.110	0.110	0.004	0.020	0.011	0.041	-	0.010	Fig. 1
CCT22L	0.150	0.150	0.130	0.130	0.004	0.020	0.014	0.039	-	0.010	Fig. 1
CCT26L	0.175	0.175	0.155	0.155	0.004	0.020	0.014	0.039	-	0.010	Fig. 1
CCT30L	0.200	0.200	0.195	0.195	0.015	0.015	0.014	0.040	-	0.010	Fig. 1
CCT36L	0.250	0.250	0.233	0.233	0.020	0.020	0.010	0.062	-	0.010	Fig. 1
CCT24P	0.160	0.160	0.130	0.130	0.012	0.020	0.015	0.040	-	0.014	Fig. 1
CCT36P	0.250	0.250	0.233	0.233	0.020	0.020	0.010	0.062	-	0.014	Fig. 1
CCT38P	0.280	0.280	0.250	0.250	0.015	-	0.019	0.079	0.108	0.014	Fig. 2

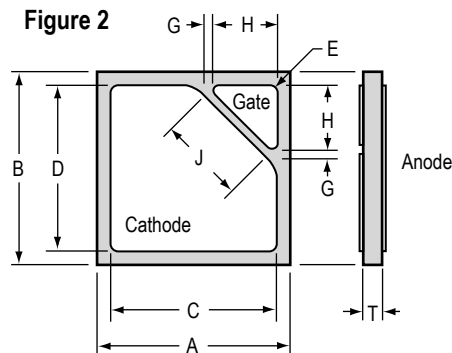

Dimensions in mm

Series Type	A	B	C	D	E	F	G	H	J	Thickness	
CCT20L	3.30	3.30	2.79	2.79	0.010	0.51	0.28	1.04	-	0.25	Fig. 1
CCT22L	3.81	3.81	0.130	0.130	0.010	0.51	0.36	0.99	-	0.25	Fig. 1
CCT26L	4.45	4.45	0.155	0.155	0.010	0.51	0.36	0.99	-	0.25	Fig. 1
CCT30L	5.08	5.08	0.195	0.195	0.038	0.38	0.36	1.00	-	0.25	Fig. 1
CCT36L	6.35	6.35	0.233	0.233	0.051	0.51	0.25	1.57	-	0.25	Fig. 1
CCT24P	4.06	4.06	0.130	0.130	0.30	0.51	0.37	1.00	-	0.35	Fig. 1
CCT36P	6.35	6.35	0.233	0.233	0.51	0.51	0.25	1.57	-	0.35	Fig. 1
CCT38P	7.11	7.11	0.250	0.250	0.38	-	0.48	2.01	2.74	0.35	Fig. 2

iso9001 CERTIFIED

USA
Sales & Tech Support (866) 258-5057
Email: sales@cynergy3.com
Cynergy3 Components
2320 Paseo de las Americas, Suite 104
San Diego, CA 92154

EUROPE - UK
Telephone +44 (0) 1202 897969
Fax +44 (0) 1202 891918
Email: sales@cynergy3.com
Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE

ASIA - Thailand
Telephone +66 (0)2 665 2517
Fax +66 (0)2 665 2588
Cynergy 3 Components, Asia
18/8 Fico Place 12th Floor
Soi Sukhumvit 21 (Asoke)
Klongtoey Nua, Wattana
Bangkok, Thailand 10110

www.cynergy3.com