




S3A THRU S3M

3.0 AMPS. SURFACE MOUNT RECTIFIERS

Voltage Range
50 to 1000 Volts
Current
3.0 Amperes

SMC/DO-214AB

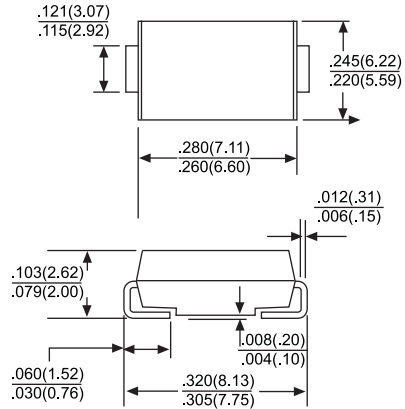

Dimensions in inches and (millimeters)

Features

- For surface mounted application
- Class passivated junction chip.
- Low forward voltage drop
- High current capability
- Easy pick and place
- High surge current capability
- Plastic material used carriers Underwriters Laboratory Classification 94V-O
- High temperature soldering:
250°C/ 10 seconds at terminals

Mechanical Data

- Case: Molded plastic
- Terminals: Solder plated
- Polarity: Indicated by cathode band
- Packaging: 16mm tape per EIA STD RS-481
- Weight: 0.21 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number		S3A	S3B	S3D	S3G	S3J	S3K	S3M	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	v
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	v
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	v
Maximum Average Forward Rectified Current at T _L =75°C	I _{F(AV)}	3.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}					100			A
Maximum Instantaneous Forward Voltage @ 3.0A	V _F					1.15			V
Maximum DC Reverse Current @ T _A = 25°C at Rated DC Blocking Voltage @ T _A = 125°C	I _R					10.0 250			uA uA
Maximum Reverse Recovery Time (Note 1)	T _{RR}					2.5			uS
Typical Junction Capacitance (Note 2)	C _J					60			pF
Operating Junction Temperature Range	T _J					-55 to +150			°C
Storage Temperature Range	T _{STG}					-55 to +150			°C

NOTES: 1. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A
 2. Measured at 1MHz and Applied V_R=4.0 Volts

RATING AND CHARACTERISTIC CURVES S3A THRU S3M



FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

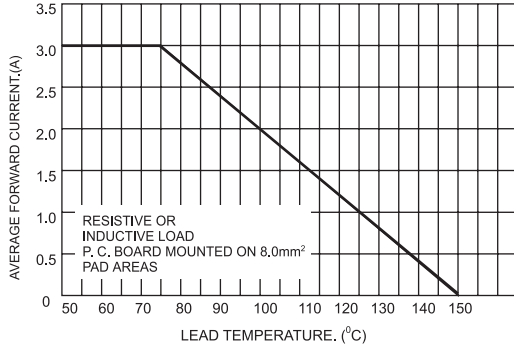


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

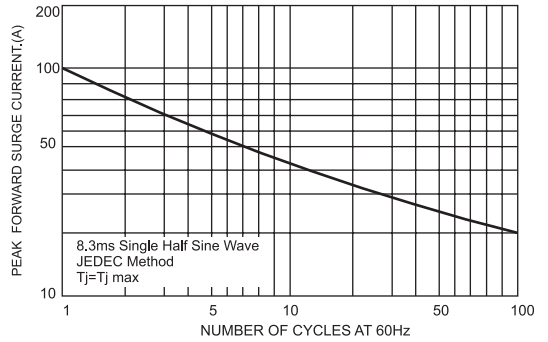


FIG.3-TYPICAL FORWARD CHARACTERISTICS

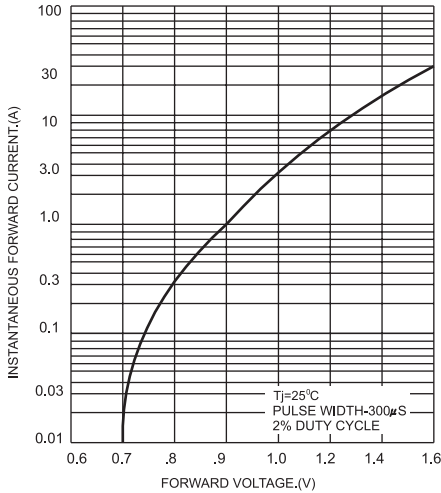


FIG.4-TYPICAL REVERSE CHARACTERISTICS

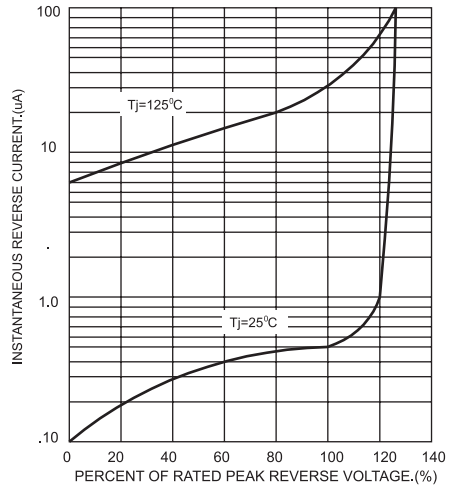


FIG.5-TYPICAL JUNCTION CAPACITANCE

